
## F# Agents + RabbitMQ

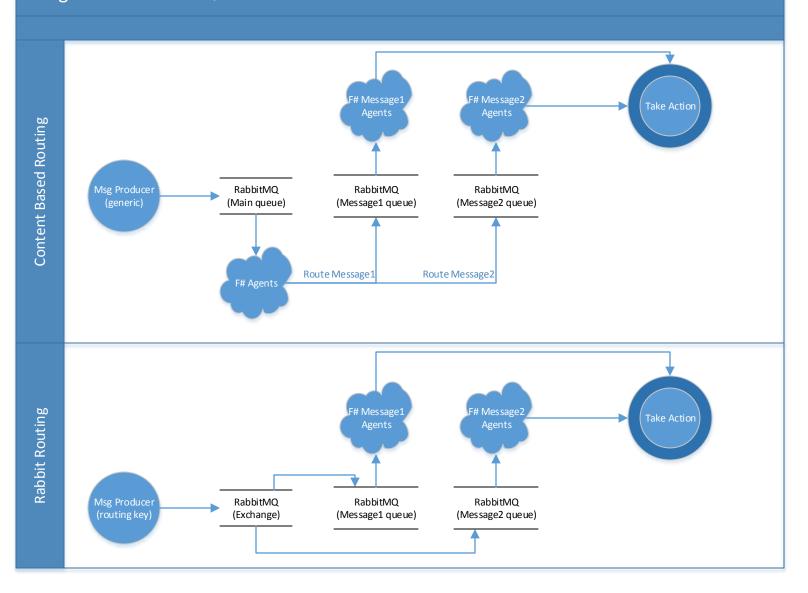

There are two main paths through the system:

- 1) Manual CBR Here we're pulling a message off the queue and deserializing it to determine which queue to route it to.
- 2) Rabbit's Routing This uses the built in routing feature in RabbitMQ. You put a message on an exchange w/ a specific routing-key which is used to determine which queue to put the message onto.