

PROJECT TITLE

Adaptive Mail : A Flexible Email Client App

DESIGNED BY

Sri Paramakalyani College [Code -123],

Alwarkurichi-627412

Department Of Computer Application

MENTOR

Smt.E.Jacqueline , M.C.A. , M.Phil. , Asst.Prof.

TEAM

TEAM ID

NM203TMID15038

TEAM LEADER

Dhana Lakshmi . V

TEAM MEMBERS

Abinaya . B

Gayathri . A

Shama Fathima . S

PROJECT INDEX

1. Introduction

1.1 Overview

1.2 Purpose

2. Problem Definition And Design Thinking

2.1 Empathy Map

2.2 Ideation and Brainstorming Map

3. Result

4. Advantages and Disadvantages

5. Applications

6. Conclusion

7. Future Scope

8. Appendix

8.1 Source Code

1.INTRODUCTION

1.1 Overview

- Adaptive Mail app is a sample project that demonstrates how to use the AndroidCompose UI toolkit to build a conversational UI. The app simulates a messaging interface, allowing the user to send and receive messages, and view a history of previous messages. It showcases some of the key features of the Compose UI toolkit, data management, and user interactions.
- Adaptive Mail is an email client application that is designed to be flexible and adaptable to the needs of individual users. The app allows users to customize the appearance and functionality of the app according to their preferences, making it easier for them to manage their email workflow.
- One of the key features of Adaptive Mail is its unified inbox, which aggregates all the emails from different accounts in one place. The app supports multiple email providers, including Gmail, Yahoo, and Microsoft Office365, among others.
- With Adaptive Mail, users can organize their emails into different folders, create filters to prioritize or exclude certain messages, and set up automatic replies or forwarding rules. The app also offers a range of customization options, such as choosing the color scheme, layout, and fonts, to make it more visually appealing and user-friendly.
- Furthermore, Adaptive Mail provides advanced search options that allow users to quickly find specific emails, attachments, or contacts with ease. The app also has strong security features, including encrypted connections and two-factor authentication for added protection against hacking or phishing attacks.


- Overall, Adaptive Mail offers a flexible and customizable email management solution that can help users streamline their workflow and increase their productivity.

1.2 Purpose


- The purpose of Adaptive mail, a flexible email client app, is to provide users with a customizable and user-friendly experience for managing their email accounts. The app is designed to adapt to the unique needs and preferences of each user, allowing them to tailor the app to fit their workflow and make it easier to manage their email.
- The app's integration with multiple email providers enables users to manage all of their email accounts in one place, which can help them stay organized and productive. The flexible user interface allows users to customize the app's layout and appearance, making it easier to find the features and tools they need.
- Adaptive mail also includes productivity tools, such as snooze emails, reminders, and custom filters and rules, which can help users manage their inbox more efficiently. Additionally, the app includes robust security features, such as end-to-end encryption and two-factor authentication, to protect users' sensitive information.

2.PROBLEM DEFINITION & DESIGN THINKING

2.1 Empathy Map

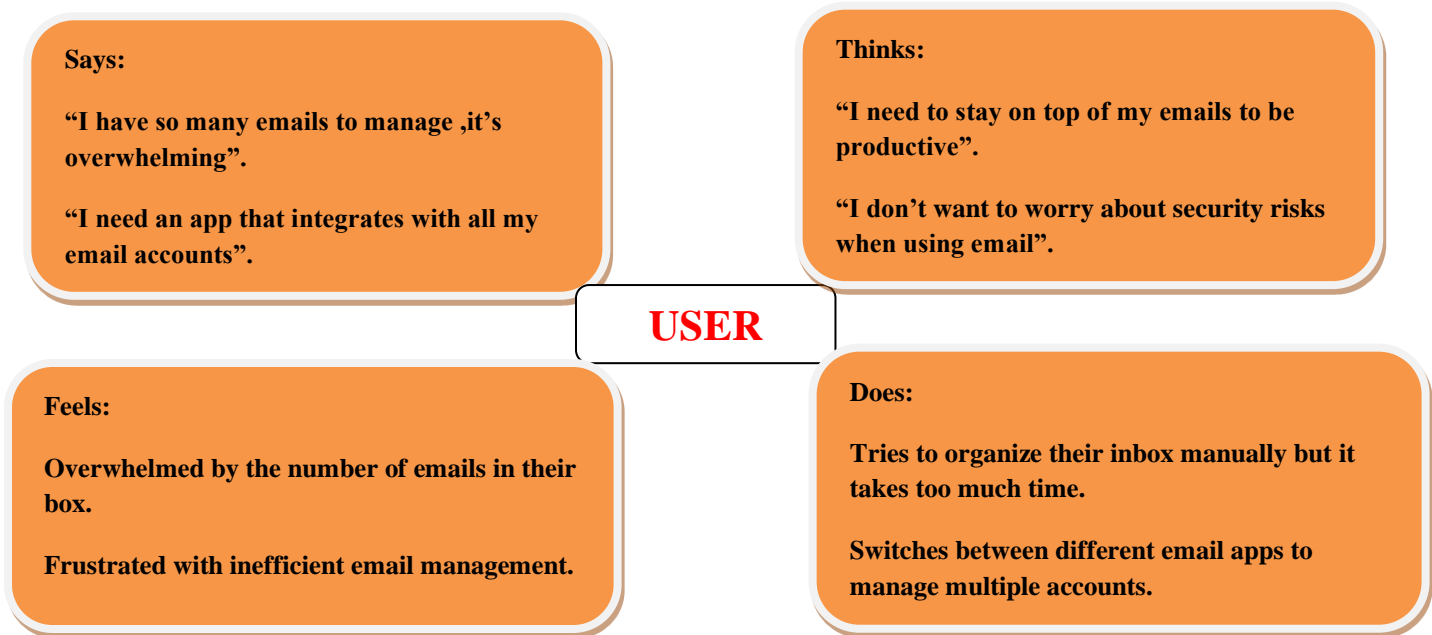


2.2 Ideation And Brainstorming Map

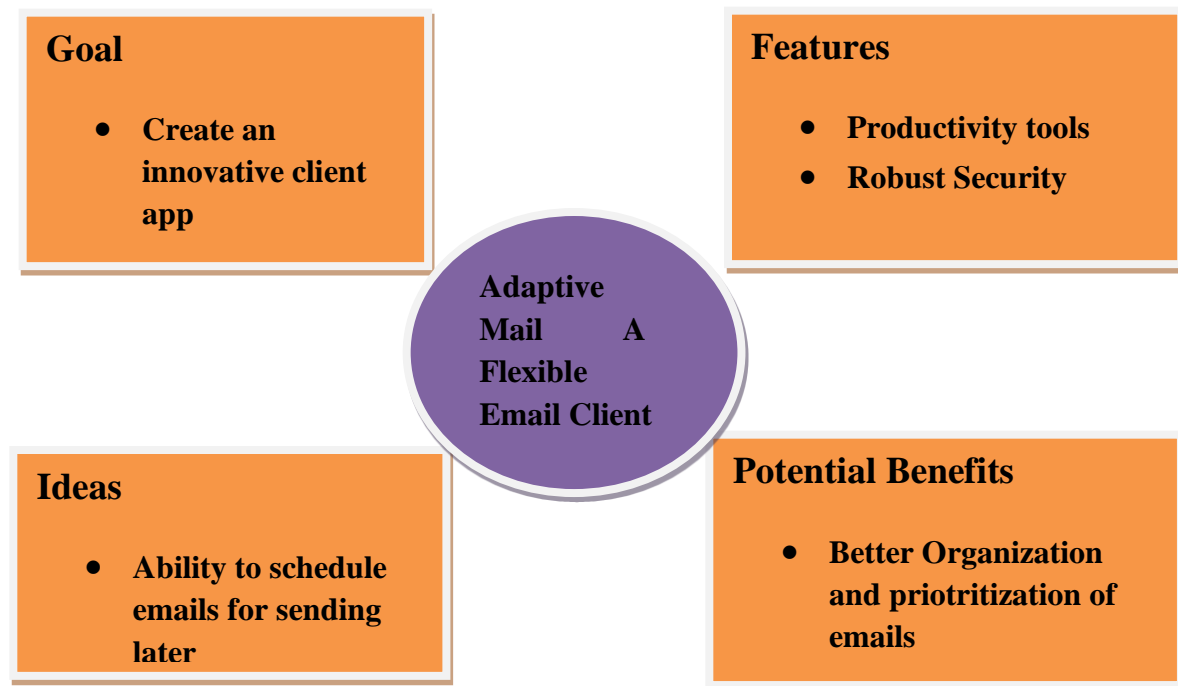


3. RESULT

Register page

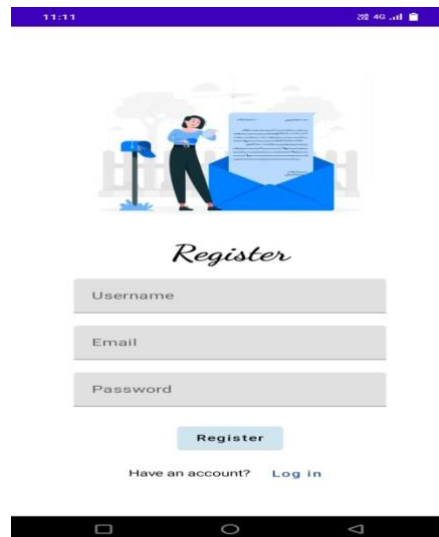

11:11 4G



Register

Username

Email


Password

Register


Have an account? [Log in](#)

Android navigation bar

Login Page

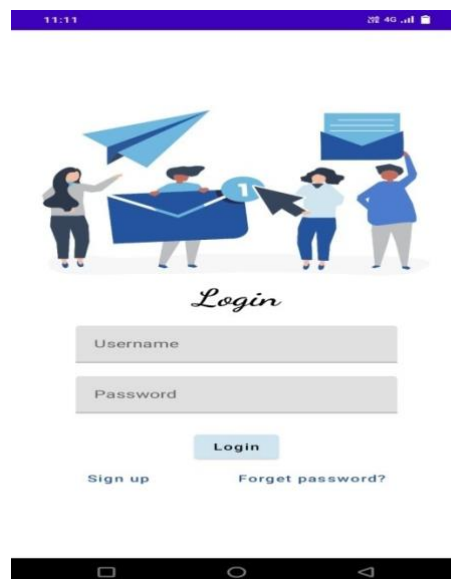

11:11 4G



Login

Username


Password

Login

[Sign up](#) [Forget password?](#)

Android navigation bar

Home Screen

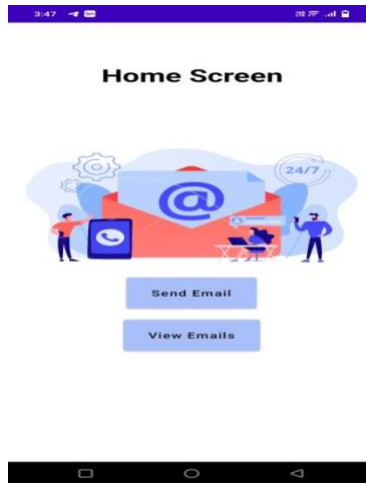

Send Mail Page

The image shows a mobile application's "Send Mail" page. At the top is a status bar with the time 3:47, signal strength, and battery level. Below the status bar, the text "Send Mail" is centered in a blue header. The main area contains three input fields: "Receiver Email-Id" with a placeholder "Email address", "Mail Subject" with a placeholder "Subject", and "Mail Body" with a placeholder "Body". Below these fields is a blue button labeled "Send Email". At the bottom of the screen is a black navigation bar with three white icons: a square, a circle, and a triangle.

View Mails Page



4. ADVANTAGES AND DISADVANTAGES

4.1 Advantages

- **Customize Interface :**

Adaptive mail provides a customizable interface that can be personalized according to the user's preferences. users can choose the theme, layout, and features that suit their needs.

- **Compatibility:**

Adaptive mail is compatible with various email services like gmail, yahoo, and outlook, which makes it easier for users to manage all their emails from a single app.

- **Advanced Filters:**

Adaptive mail offers advanced filtering options that allow users to sort their emails based on various criteria like sender, subject, date, and size. this feature helps users quickly find the emails they need.

- **Security:**

Adaptive mail takes security seriously and offers encryption, two-factor authentication, and other security features to protect users' emails from hackers and other threats.

- **Cross-Platform Compatibility:**

Adaptive mail is available on multiple platforms like android, ios, windows, and mac, which makes it easy for users to access their emails from any device.

- **Integration:**

Adaptive mail integrates with other productivity apps like trello, asana, and slack, which helps users manage their tasks and workflows more efficiently.

- **Artificial Intelligence:**

Adaptive mail uses artificial intelligence to help users manage their emails more efficiently. the app can learn from the user's behavior and suggest replies, categorize emails, and perform other tasks to save time and increase productivity

4.2 Disadvantages

- **Learning Curve:**

Because Adaptive mail offers many customizable features, there may be a learning curve for users who are not tech-savvy. It may take some time to learn how to use all of the features effectively.

- **Cost:**

Adaptive mail may come with a cost to access some of its advanced features or to remove ads from the app. This may be a drawback for some users who are looking for a free email client app.

- **Privacy Concerns:**

As with any email client app, there may be privacy concerns with Adaptive mail. Users need to ensure that their emails are secure and that their data is not being shared with third-party advertisers.

- **Compatibility:**

While Adaptive mail is compatible with many email services, it may not be compatible with all of them. This could be a disadvantage for users who rely on a particular email service that is not supported.

- **Dependence on Internet Connection:**

Since Adaptive mail is an online app, it requires a stable internet connection. Users may not be able to access their emails if they do not have an internet connection, which could be a significant disadvantage for users who are frequently on the go or in areas with poor connectivity.

5. APPLICATIONS

- **Personal Email Management:**

Adaptive mail can be used to manage personal emails from various email services like Gmail, Yahoo, and Outlook. The advanced filtering options and artificial intelligence features can help users sort and manage their emails more efficiently.

- **Business Email Management:**

Adaptive mail can also be used to manage business emails from multiple email accounts. The integration with other productivity apps like Trello, Asana, and Slack can help users manage their tasks and workflows more efficiently.

- **Marketing:**

Adaptive mail can be used for marketing purposes, like sending newsletters and promotional emails to customers. The app's analytics features can help users track the performance of their email campaigns and make adjustments accordingly.

- **Customer Service:**

Adaptive mail can be used for customer service purposes, like responding to customer inquiries and resolving issues. The app's artificial intelligence features can help automate responses and speed up the resolution process.

- **Education:**

Adaptive mail can be used in educational settings, like for student-teacher communication and class announcements. The app's advanced filtering options can help educators sort and manage emails from multiple students more efficiently.

6. CONCLUSION

- In conclusion, Adaptive mail is a flexible email client app that offers several advantages for personal and business use. Its customizable interface, advanced filtering options, security features, cross-platform compatibility, integration with other apps, and artificial intelligence

capabilities make it a highly efficient and productive tool for managing emails.

- However, there are also some potential disadvantages to using Adaptive mail, including a learning curve, cost, privacy concerns, compatibility issues, and dependence on an internet connection.
- Overall, Adaptive mail is a powerful tool that can be used for various applications, including personal and business email management, marketing, customer service, education, and research. It is important for users to weigh the pros and cons before deciding whether or not to use Adaptive mail and to take steps to ensure their emails are secure and protected.

7.FUTURE SCOPE

❖ The future scope of Adaptive mail, a flexible email client app, looks promising. Here are some potential future developments and advancements that could be made in the app:

- **Integration with AI :**

The app's current AI features are already impressive, but there is room for even more advancement. As AI technology improves, Adaptive mail could incorporate even more sophisticated features, such as predicting which emails are most important to a user and automatically scheduling responses.

- **Further Customization Options:**

Adaptive mail's current customization options are already vast, but there is always room for more. The app could continue to expand its customization options to allow users to tailor their email management experience even further.

- **Greater Collaboration Capabilities:**

The app already offers integration with other productivity apps, but it could expand its collaboration capabilities even further. This could include features such as real-time collaboration on emails, shared email inboxes, and integration with video conferencing software.

- **Improved Security Features:**

As email security continues to be a growing concern, Adaptive mail could improve its security features to ensure that emails are protected from phishing attacks, malware, and other online threats.

- ❖ The future scope of Adaptive mail looks promising, with potential advancements in AI, customization options, collaboration capabilities, security features, and integration with wearable devices. As technology continues to evolve, Adaptive mail will likely continue to adapt and improve, making it an even more valuable tool for managing emails efficiently and effectively.

8.APPENDIX

8.1 Source code

User.kt

```
package com.example.emailapplication
import androidx.room.ColumnInfo
import androidx.room.Entity
import androidx.room.PrimaryKey
@Entity(tableName = "user_table")
data class User(
    @PrimaryKey(autoGenerate = true) val id: Int?,
```

```
    @ColumnInfo(name = "first_name") val firstName: String?,  
    @ColumnInfo(name = "last_name") val lastName: String?,  
    @ColumnInfo(name = "email") val email: String?,  
    @ColumnInfo(name = "password") val password: String?,  
)
```

UserDao.kt

```
package com.example.emailapplication  
import androidx.room.*  
@Dao  
interface UserDao {  
    @Query("SELECT * FROM user_table WHERE email = :email")  
    suspend fun getUserByEmail(email: String): User?  
    @Insert(onConflict = OnConflictStrategy.REPLACE)  
    suspend fun insertUser(user: User)  
    @Update  
    suspend fun updateUser(user: User)  
    @Delete  
    suspend fun deleteUser(user: User)  
}
```

UserDatabase.kt

```
package com.example.emailapplication  
import android.content.Context  
import androidx.room.Database  
import androidx.room.Room  
import androidx.room.RoomDatabase  
@Database(entities = [User::class], version = 1)  
abstract class UserDatabase : RoomDatabase() {  
    abstract fun userDao(): UserDao  
    companion object {  
        @Volatile  
        private var instance: UserDatabase? = null  
    }  
}
```

```

fun getDatabase(context: Context): UserDatabase {
    return instance ?: synchronized(this) {
        val newInstance = Room.databaseBuilder(
            context.applicationContext,
            UserDatabase::class.java,
            "user_database"
        ).build()
        instance = newInstance
        newInstance
    }
}
}
}
}

```

UserDatabaseHelper.kt

```

package com.example.emailapplication
import android.annotation.SuppressLint
import android.content.ContentValues
import android.content.Context
import android.database.Cursor
import android.database.sqlite.SQLiteDatabase
import android.database.sqlite.SQLiteOpenHelper

class UserDatabaseHelper(context: Context) :
    SQLiteOpenHelper(context, DATABASE_NAME, null,
        DATABASE_VERSION) {

    companion object {
        private const val DATABASE_VERSION = 1
        private const val DATABASE_NAME = "UserDatabase.db"

        private const val TABLE_NAME = "user_table"
        private const val COLUMN_ID = "id"
        private const val COLUMN_FIRST_NAME = "first_name"
    }
}

```

```

        private const val COLUMN_LAST_NAME = "last_name"
        private const val COLUMN_EMAIL = "email"
        private const val COLUMN_PASSWORD = "password"
    }

    override fun onCreate(db: SQLiteDatabase?) {
        val createTable = "CREATE TABLE $TABLE_NAME (" +
            "$COLUMN_ID INTEGER PRIMARY KEY"
        AUTOINCREMENT, " +
            "$COLUMN_FIRST_NAME TEXT, " +
            "$COLUMN_LAST_NAME TEXT, " +
            "$COLUMN_EMAIL TEXT, " +
            "$COLUMN_PASSWORD TEXT" +
            ")"

        db?.execSQL(createTable)
    }

    override fun onUpgrade(db: SQLiteDatabase?, oldVersion: Int,
        newVersion: Int) {
        db?.execSQL("DROP TABLE IF EXISTS $TABLE_NAME")
        onCreate(db)
    }

    fun insertUser(user: User) {
        val db = writableDatabase
        val values = ContentValues()
        values.put(COLUMN_FIRST_NAME, user.firstName)
        values.put(COLUMN_LAST_NAME, user.lastName)
        values.put(COLUMN_EMAIL, user.email)
        values.put(COLUMN_PASSWORD, user.password)
        db.insert(TABLE_NAME, null, values)
        db.close()
    }

```



```

@SuppressLint("Range")
fun getUserByUsername(username: String): User? {
    val db = readableDatabase
    val cursor: Cursor = db.rawQuery("SELECT * FROM
$TABLE_NAME WHERE $COLUMN_FIRST_NAME = ?",
arrayOf(username))
    var user: User? = null
    if (cursor.moveToFirst()) {
        user = User(
            id = cursor.getInt(cursor.getColumnIndex(COLUMN_ID)),
            firstName =
cursor.getString(cursor.getColumnIndex(COLUMN_FIRST_NAME)),
            lastName =
cursor.getString(cursor.getColumnIndex(COLUMN_LAST_NAME)),
            email =
cursor.getString(cursor.getColumnIndex(COLUMN_EMAIL)),
            password =
cursor.getString(cursor.getColumnIndex(COLUMN_PASSWORD)),
        )
    }
    cursor.close()
    db.close()
    return user
}

@SuppressLint("Range")
fun getUserById(id: Int): User? {
    val db = readableDatabase
    val cursor: Cursor = db.rawQuery("SELECT * FROM
$TABLE_NAME WHERE $COLUMN_ID = ?", arrayOf(id.toString()))
    var user: User? = null
    if (cursor.moveToFirst()) {
        user = User(
            id = cursor.getInt(cursor.getColumnIndex(COLUMN_ID)),
            firstName =
cursor.getString(cursor.getColumnIndex(COLUMN_FIRST_NAME)),

```

```

        lastName =
        cursor.getString(cursor.getColumnIndex(COLUMN_LAST_NAME)),
        email =
        cursor.getString(cursor.getColumnIndex(COLUMN_EMAIL)),
        password =
        cursor.getString(cursor.getColumnIndex(COLUMN_PASSWORD)),
    )
}
cursor.close()
db.close()
return user
}

```

```

@SuppressLint("Range")
fun getAllUsers(): List<User> {
    val users = mutableListOf<User>()
    val db = readableDatabase
    val cursor: Cursor = db.rawQuery("SELECT * FROM
$TABLE_NAME", null)
    if (cursor.moveToFirst()) {
        do {
            val user = User(
                id = cursor.getInt(cursor.getColumnIndex(COLUMN_ID)),
                firstName =
                cursor.getString(cursor.getColumnIndex(COLUMN_FIRST_NAME)),
                lastName =
                cursor.getString(cursor.getColumnIndex(COLUMN_LAST_NAME)),
                email =
                cursor.getString(cursor.getColumnIndex(COLUMN_EMAIL)),
                password =
                cursor.getString(cursor.getColumnIndex(COLUMN_PASSWORD)),
            )
            users.add(user)
        } while (cursor.moveToNext())
    }
}

```

```

        cursor.close()
        db.close()
        return users
    }
}

```

Email.kt

```

package com.example.emailapplication

import androidx.room.ColumnInfo
import androidx.room.Entity
import androidx.room.PrimaryKey

@Entity(tableName = "email_table")
data class Email(
    @PrimaryKey(autoGenerate = true) val id: Int?,
    @ColumnInfo(name = "receiver_mail") val receiverMail: String?,
    @ColumnInfo(name = "subject") val subject: String?,
    @ColumnInfo(name = "body") val body: String?,
)

```

EmailDao.kt

```

package com.example.emailapplication

import androidx.room.*

@Dao
interface EmailDao {

    @Query("SELECT * FROM email_table WHERE subject= :subject")
    suspend fun getOrderBySubject(subject: String): Email?
}

```

```

    @Insert(onConflict = OnConflictStrategy.REPLACE)
    suspend fun insertEmail(email: Email)

    @Update
    suspend fun updateEmail(email: Email)

    @Delete
    suspend fun deleteEmail(email: Email)
}

```

EmailDatabase.kt

```

package com.example.emailapplication

import android.content.Context
import androidx.room.Database
import androidx.room.Room
import androidx.room.RoomDatabase

@Database(entities = [Email::class], version = 1)
abstract class EmailDatabase : RoomDatabase() {

    abstract fun emailDao(): EmailDao

    companion object {

        @Volatile
        private var instance: EmailDatabase? = null

        fun getDatabase(context: Context): EmailDatabase {
            return instance ?: synchronized(this) {
                val newInstance = Room.databaseBuilder(
                    context.applicationContext,
                    EmailDatabase::class.java,
                    "email_database"
                )
            }
        }
    }
}

```

```

        ).build()
        instance = newInstance
        newInstance
    }
}
}
}
}

```

EmailDatabaseHelper.kt

```
package com.example.emailapplication
```

```

import android.annotation.SuppressLint
import android.content.ContentValues
import android.content.Context
import android.database.Cursor
import android.database.sqlite.SQLiteDatabase
import android.database.sqlite.SQLiteOpenHelper

```

```

class EmailDatabaseHelper(context: Context) :
    SQLiteOpenHelper(context, DATABASE_NAME,
null,DATABASE_VERSION){

```

```

    companion object {
        private const val DATABASE_VERSION = 1
        private const val DATABASE_NAME = "EmailDatabase.db"

        private const val TABLE_NAME = "email_table"
        private const val COLUMN_ID = "id"
        private const val COLUMN_RECEIVER_MAIL = "receiver_mail"
        private const val COLUMN_SUBJECT = "subject"
        private const val COLUMN_BODY = "body"
    }

```

```

    override fun onCreate(db: SQLiteDatabase?) {

```

```

        val createTable = "CREATE TABLE $TABLE_NAME (" +
            "${COLUMN_ID} INTEGER PRIMARY KEY" +
            "AUTOINCREMENT, " +
            "${COLUMN_RECEIVER_MAIL} Text, " +
            "${COLUMN_SUBJECT} TEXT ," +
            "${COLUMN_BODY} TEXT " +
            ")"

```

```

        db?.execSQL(createTable)
    }

```

```

    override fun onUpgrade(db: SQLiteDatabase?, oldVersion: Int,
        newVersion: Int) {
        db?.execSQL("DROP TABLE IF EXISTS $TABLE_NAME")
        onCreate(db)
    }

```

```

    fun insertEmail(email: Email) {
        val db = writableDatabase
        val values = ContentValues()
        values.put(COLUMN_RECEIVER_MAIL, email.receiverMail)
        values.put(COLUMN_SUBJECT, email.subject)
        values.put(COLUMN_BODY, email.body)
        db.insert(TABLE_NAME, null, values)
        db.close()
    }

```

```

    @SuppressWarnings("Range")
    fun getEmailBySubject(subject: String): Email? {
        val db = readableDatabase
        val cursor: Cursor = db.rawQuery("SELECT * FROM" +
            "$TABLE_NAME WHERE $COLUMN_SUBJECT = ?", arrayOf(subject))
        var email: Email? = null
    }

```

```

        if (cursor.moveToFirst()) {
            email = Email(
                id = cursor.getInt(cursor.getColumnIndex(COLUMN_ID)),
                recevierMail =
cursor.getString(cursor.getColumnIndex(COLUMN_RECEIVER_MAIL)),
                subject =
cursor.getString(cursor.getColumnIndex(COLUMN_SUBJECT)),
                body =
cursor.getString(cursor.getColumnIndex(COLUMN_BODY)),
            )
        }
        cursor.close()
        db.close()
        return email
    }
    @SuppressWarnings("Range")
    fun getEmailById(id: Int): Email? {
        val db = readableDatabase
        val cursor: Cursor = db.rawQuery("SELECT * FROM
$TABLE_NAME WHERE $COLUMN_ID = ?", arrayOf(id.toString()))
        var email: Email? = null
        if (cursor.moveToFirst()) {
            email = Email(
                id = cursor.getInt(cursor.getColumnIndex(COLUMN_ID)),
                recevierMail =
cursor.getString(cursor.getColumnIndex(COLUMN_RECEIVER_MAIL)),
                subject =
cursor.getString(cursor.getColumnIndex(COLUMN_SUBJECT)),
                body =
cursor.getString(cursor.getColumnIndex(COLUMN_BODY)),
            )
        }
        cursor.close()
        db.close()
        return email
    }

```

```

    }

    @SuppressWarnings("Range")
    fun getAllEmails(): List<Email> {
        val emails = mutableListOf<Email>()
        val db = readableDatabase
        val cursor: Cursor = db.rawQuery("SELECT * FROM
$TABLE_NAME", null)
        if (cursor.moveToFirst()) {
            do {
                val email = Email(
                    id = cursor.getInt(cursor.getColumnIndex(COLUMN_ID)),
                    receiverMail =
cursor.getString(cursor.getColumnIndex(COLUMN_RECEIVER_MAIL)),
                    subject =
cursor.getString(cursor.getColumnIndex(COLUMN_SUBJECT)),
                    body =
cursor.getString(cursor.getColumnIndex(COLUMN_BODY)),
                )
                emails.add(email)
            } while (cursor.moveToNext())
        }
        cursor.close()
        db.close()
        return emails
    }
}

```

LoginActivity.kt

```
package com.example.emailapplication
```

```
import android.content.Context
import android.content.Intent
```



```

import android.os.Bundle
import androidx.activity.ComponentActivity
import androidx.activity.compose.setContent
import androidx.compose.foundation.Image
import androidx.compose.foundation.background
import androidx.compose.foundation.layout.*
import androidx.compose.material.*
import androidx.compose.runtime.*
import androidx.compose.ui.Alignment
import androidx.compose.ui.Modifier
import androidx.compose.ui.graphics.Color
import androidx.compose.ui.layout.ContentScale
import androidx.compose.ui.res.painterResource
import androidx.compose.ui.text.font.FontFamily
import androidx.compose.ui.text.font.FontWeight
import androidx.compose.ui.text.input.PasswordVisualTransformation
import androidx.compose.ui.tooling.preview.Preview
import androidx.compose.ui.unit.dp
import androidx.compose.ui.unit.sp
import androidx.core.content.ContextCompat
import com.example.emailapplication.ui.theme.EmailApplicationTheme

```

```

class LoginActivity : ComponentActivity() {
    private lateinit var databaseHelper: UserDatabaseHelper
    override fun onCreate(savedInstanceState: Bundle?) {
        super.onCreate(savedInstanceState)
        databaseHelper = UserDatabaseHelper(this)
        setContent {

            LoginScreen(this, databaseHelper)
        }
    }
}

@Composable
fun LoginScreen(context: Context, databaseHelper: UserDatabaseHelper) {

```

```
var username by remember { mutableStateOf("") }
var password by remember { mutableStateOf("") }
var error by remember { mutableStateOf("") }
```

```
Column(
    modifier = Modifier.fillMaxSize().background(Color.White),
    horizontalAlignment = Alignment.CenterHorizontally,
    verticalArrangement = Arrangement.Center
) {
    Image(
        painterResource(id = R.drawable.email_login), contentDescription =
""
    )
}
```

```
Text(
    fontSize = 36.sp,
    fontWeight = FontWeight.ExtraBold,
    fontFamily = FontFamily.Cursive,
    text = "Login"
)
Spacer(modifier = Modifier.height(10.dp))
```

```
TextField(
    value = username,
    onChange = { username = it },
    label = { Text("Username") },
    modifier = Modifier.padding(10.dp)
        .width(280.dp)
)
```

```
TextField(
    value = password,
```

```

onValueChange = { password = it },
label = { Text("Password") },
visualTransformation = PasswordVisualTransformation(),
modifier = Modifier.padding(10.dp)
    .width(280.dp)
)

if (error.isNotEmpty()) {
    Text(
        text = error,
        color = MaterialTheme.colors.error,
        modifier = Modifier.padding(vertical = 16.dp)
    )
}

Button(
    onClick = {
        if (username.isNotEmpty() && password.isNotEmpty()) {
            val user = databaseHelper.getUserByUsername(username)
            if (user != null && user.password == password) {
                error = "Successfully log in"
                context.startActivity(
                    Intent(
                        context,
                        MainActivity::class.java
                    )
                )
                //onLoginSuccess()
            }

        } else {
            error = "Please fill all fields"
        }
    },

```

```

        colors = ButtonDefaults.buttonColors(backgroundColor =
Color(0xFFd3e5ef)),
        modifier = Modifier.padding(top = 16.dp)
    ) {
        Text(text = "Login")
    }
    Row {
        TextButton(onClick = {context.startActivity(
            Intent(
                context,
                RegisterActivity::class.java
            )
        )})
        { Text(color = Color(0xFF31539a),text = "Sign up") }
        TextButton(onClick = {
        })

        {
            Spacer(modifier = Modifier.width(60.dp))
            Text(color = Color(0xFF31539a),text = "Forget password?")
        }
    }
}

private fun startMainPage(context: Context) {
    val intent = Intent(context, MainActivity::class.java)
    ContextCompat.startActivity(context, intent, null)
}

```

RegisterActivity.kt

```
package com.example.emailapplication
```

```
import android.content.Context
```

```
import android.content.Intent
import android.os.Bundle
import androidx.activity.ComponentActivity
import androidx.activity.compose.setContent
import androidx.compose.foundation.Image
import androidx.compose.foundation.background
import androidx.compose.foundation.layout.*
import androidx.compose.material.*
import androidx.compose.runtime.*
import androidx.compose.ui.Alignment
import androidx.compose.ui.Modifier
import androidx.compose.ui.graphics.Color
import androidx.compose.ui.layout.ContentScale
import androidx.compose.ui.res.painterResource
import androidx.compose.ui.text.font.FontFamily
import androidx.compose.ui.text.font.FontWeight
import androidx.compose.ui.text.input.PasswordVisualTransformation
import androidx.compose.ui.tooling.preview.Preview
import androidx.compose.ui.unit.dp
import androidx.compose.ui.unit.sp
import androidx.core.content.ContextCompat
import com.example.emailapplication.ui.theme.EmailApplicationTheme
```

```
class RegisterActivity : ComponentActivity() {
    private lateinit var databaseHelper: UserDatabaseHelper
    override fun onCreate(savedInstanceState: Bundle?) {
        super.onCreate(savedInstanceState)
        databaseHelper = UserDatabaseHelper(this)
        setContent {

            RegistrationScreen(this, databaseHelper)
        }
    }
}
```

```

@Composable
fun RegistrationScreen(context: Context, databaseHelper:
UserDatabaseHelper) {

    var username by remember { mutableStateOf("") }
    var password by remember { mutableStateOf("") }
    var email by remember { mutableStateOf("") }
    var error by remember { mutableStateOf("") }

    Column(
        modifier = Modifier.fillMaxSize().background(Color.White),
        horizontalAlignment = Alignment.CenterHorizontally,
        verticalArrangement = Arrangement.Center
    ) {
        Image(
            painterResource(id = R.drawable.email_signup), contentDescription
= "",
            modifier = Modifier.height(300.dp)
        )
        Text(
            fontSize = 36.sp,
            fontWeight = FontWeight.ExtraBold,
            fontFamily = FontFamily.Cursive,
            text = "Register"
        )

        Spacer(modifier = Modifier.height(10.dp))
        TextField(
            value = username,
            onChange = { username = it },
            label = { Text("Username") },
            modifier = Modifier
                .padding(10.dp)

```

```

        .width(280.dp)

    )

    TextField(
        value = email,
        onChange = { email = it },
        label = { Text("Email") },
        modifier = Modifier
            .padding(10.dp)
            .width(280.dp)
    )

    TextField(
        value = password,
        onChange = { password = it },
        label = { Text("Password") },
        visualTransformation = PasswordVisualTransformation(),
        modifier = Modifier
            .padding(10.dp)
            .width(280.dp)
    )

    if (error.isNotEmpty()) {
        Text(
            text = error,
            color = MaterialTheme.colors.error,
            modifier = Modifier.padding(vertical = 16.dp)
        )
    }

    Button(
        onClick = {

```

```

        if (username.isNotEmpty() && password.isNotEmpty() &&
email.isNotEmpty()) {
            val user = User(
                id = null,
                firstName = username,
                lastName = null,
                email = email,
                password = password
            )
            databaseHelper.insertUser(user)
            error = "User registered successfully"
            // Start LoginActivity using the current context
            context.startActivity(
                Intent(
                    context,
                    LoginActivity::class.java
                )
            )

        } else {
            error = "Please fill all fields"
        }
    },
    colors = ButtonDefaults.buttonColors(backgroundColor =
Color(0xFFd3e5ef)),
    modifier = Modifier.padding(top = 16.dp)
) {
    Text(text = "Register")
}
Spacer(modifier = Modifier.width(10.dp))
Spacer(modifier = Modifier.height(10.dp))

Row() {
    Text(

```



```

        modifier = Modifier.padding(top = 14.dp), text = "Have an
account?"
    )
    TextButton(onClick = {
        context.startActivity(
            Intent(
                context,
                LoginActivity::class.java
            )
        )
    })

    {
        Spacer(modifier = Modifier.width(10.dp))
        Text(color = Color(0xFF31539a),text = "Log in")
    }
}
}
}
private fun startLoginActivity(context: Context) {
    val intent = Intent(context, LoginActivity::class.java)
    ContextCompat.startActivity(context, intent, null)
}

```

MainActivity.kt

```

package com.example.emailapplication

import android.content.Context
import android.content.Intent
import android.os.Bundle
import androidx.activity.ComponentActivity
import androidx.activity.compose.setContent
import androidx.compose.foundation.Image

```

```
import androidx.compose.foundation.background
import androidx.compose.foundation.layout.*
import androidx.compose.material.*
import androidx.compose.runtime.Composable
import androidx.compose.ui.Alignment
import androidx.compose.ui.Modifier
import androidx.compose.ui.graphics.Color
import androidx.compose.ui.layout.ContentScale
import androidx.compose.ui.res.painterResource
import androidx.compose.ui.text.font.FontWeight
import androidx.compose.ui.tooling.preview.Preview
import androidx.compose.ui.unit.dp
import androidx.compose.ui.unit.sp
import androidx.core.content.ContextCompat
import androidx.core.content.ContextCompat.startActivity
import com.example.emailapplication.ui.theme.EmailApplicationTheme
```

```
class MainActivity : ComponentActivity() {
    override fun onCreate(savedInstanceState: Bundle?) {
        super.onCreate(savedInstanceState)
        setContent {
            // A surface container using the 'background' color from the theme
            Surface(
                modifier = Modifier.fillMaxSize().background(Color.White),
            ) {
                Email(this)
            }
        }
    }
}
```

```
@Composable
fun Email(context: Context) {
    Text(
```

```

        text = "Home Screen",
        modifier = Modifier.padding(top = 74.dp, start = 100.dp, bottom =
24.dp),
        color = Color.Black,
        fontWeight = FontWeight.Bold,
        fontSize = 32.sp
    )

    Column(
        horizontalAlignment = Alignment.CenterHorizontally,
        verticalArrangement = Arrangement.Center
    ) {
        Image(
            painterResource(id = R.drawable.home_screen), contentDescription
= ""
        )
    }

```

```

        Button(onClick = {
            context.startActivity(
                Intent(
                    context,
                    SendMailActivity::class.java
                )
            )
        },
        colors = ButtonDefaults.buttonColors(backgroundColor =
Color(0xFFadbf4))
    ) {
        Text(
            text = "Send Email",
            modifier = Modifier.padding(10.dp),
            color = Color.Black,
            fontSize = 15.sp
        )
    }

```

```

    }

    Spacer(modifier = Modifier.height(20.dp))

    Button(onClick = {
        context.startActivity(
            Intent(
                context,
                ViewMailActivity::class.java
            )
        )
    },
        colors = ButtonDefaults.buttonColors(backgroundColor =
Color(0xFFadbef4))
    ) {
        Text(
            text = "View Emails",
            modifier = Modifier.padding(10.dp),
            color = Color.Black,
            fontSize = 15.sp
        )
    }

}
}

```

SendMailActivity.kt

```

package com.example.emailapplication

import android.annotation.SuppressLint
import android.content.Context
import android.content.Intent
import android.os.Bundle

```

```

import androidx.activity.ComponentActivity
import androidx.activity.compose.setContent
import androidx.compose.foundation.layout.*
import androidx.compose.material.*
import androidx.compose.runtime.*
import androidx.compose.ui.Alignment
import androidx.compose.ui.Modifier
import androidx.compose.ui.graphics.Color
import androidx.compose.ui.platform.LocalContext
import androidx.compose.ui.text.TextStyle
import androidx.compose.ui.text.font.FontWeight
import androidx.compose.ui.text.style.TextAlign
import androidx.compose.ui.tooling.preview.Preview
import androidx.compose.ui.unit.dp
import androidx.compose.ui.unit.sp
import com.example.emailapplication.ui.theme.EmailApplicationTheme

class SendMailActivity : ComponentActivity() {
    private lateinit var dbHelper: EmailDatabaseHelper
    @SuppressLint("UnusedMaterialScaffoldPaddingParameter")
    override fun onCreate(savedInstanceState: Bundle?) {
        super.onCreate(savedInstanceState)
        dbHelper = EmailDatabaseHelper(this)
        setContent {

            Scaffold(
                // in scaffold we are specifying top bar.
                topBar = {
                    // inside top bar we are specifying
                    // background color.
                    TopAppBar(backgroundColor = Color(0xFFadbef4), modifier =
Modifier.height(80.dp),
                    // along with that we are specifying
                    // title for our top bar.
                    title = {

```

```

        // in the top bar we are specifying
        // title as a text
        Text(
            // on below line we are specifying
            // text to display in top app bar.
            text = "Send Mail",
            fontSize = 32.sp,
            color = Color.Black,

            // on below line we are specifying
            // modifier to fill max width.
            modifier = Modifier.fillMaxWidth(),

            // on below line we are
            // specifying text alignment.
            textAlign = TextAlign.Center,
        )
    }
) {
    // on below line we are
    // calling method to display UI.
    openEmailer(this,databaseHelper)
}
}
}
}
@Composable
fun openEmailer(context: Context, databaseHelper: EmailDatabaseHelper)
{

    // in the below line, we are
    // creating variables for URL
    var recevierMail by remember { mutableStateOf("") }

```

```

var subject by remember { mutableStateOf("") }
var body by remember { mutableStateOf("") }
var error by remember { mutableStateOf("") }

// on below line we are creating
// a variable for a context
val ctx = LocalContext.current

// on below line we are creating a column
Column(
    // on below line we are specifying modifier
    // and setting max height and max width
    // for our column
    modifier = Modifier
        .fillMaxSize()
        .padding(top = 55.dp, bottom = 25.dp, start = 25.dp, end = 25.dp),
    horizontalAlignment = Alignment.Start
) {

    // on the below line, we are
    // creating a text field.
    Text(text = "Receiver Email-Id",
        fontWeight = FontWeight.Bold,
        fontSize = 16.sp)
    TextField(
        // on below line we are specifying
        // value for our text field.
        value = recevierMail,

        // on below line we are adding on value
        // change for text field.
        onChange = { recevierMail = it },

        // on below line we are adding place holder as text
        label = { Text(text = "Email address") },

```

```

placeholder = { Text(text = "abc@gmail.com") },

// on below line we are adding modifier to it
// and adding padding to it and filling max width
modifier = Modifier
    .padding(16.dp)
    .fillMaxWidth(),

// on below line we are adding text style
// specifying color and font size to it.
textStyle = TextStyle(color = Color.Black, fontSize = 15.sp),

// on below line we are
// adding single line to it.
singleLine = true,
)
// on below line adding a spacer.
Spacer(modifier = Modifier.height(10.dp))

Text(text = "Mail Subject",
    fontWeight = FontWeight.Bold,
    fontSize = 16.sp)
// on the below line, we are creating a text field.
TextField(
    // on below line we are specifying
    // value for our text field.
    value = subject,

    // on below line we are adding on value change
    // for text field.
    onChange = { subject = it },

    // on below line we are adding place holder as text
    placeholder = { Text(text = "Subject") },

```



```

// on below line we are adding modifier to it
// and adding padding to it and filling max width
modifier = Modifier
    .padding(16.dp)
    .fillMaxWidth(),

// on below line we are adding text style
// specifying color and font size to it.
textStyle = TextStyle(color = Color.Black, fontSize = 15.sp),

// on below line we are
// adding single line to it.
singleLine = true,
)

// on below line adding a spacer.
Spacer(modifier = Modifier.height(10.dp))

Text(text = "Mail Body",
    fontWeight = FontWeight.Bold,
    fontSize = 16.sp)
// on the below line, we are creating a text field.
TextField(
    // on below line we are specifying
    // value for our text field.
    value = body,

    // on below line we are adding on value
    // change for text field.
    onChange = { body = it },

    // on below line we are adding place holder as text
    placeholder = { Text(text = "Body") },

    // on below line we are adding modifier to it

```

```

// and adding padding to it and filling max width
modifier = Modifier
    .padding(16.dp)
    .fillMaxWidth(),

// on below line we are adding text style
// specifying color and font size to it.
textStyle = TextStyle(color = Color.Black, fontSize = 15.sp),

// on below line we are
// adding single line to it.
singleLine = true,
)

// on below line adding a spacer.
Spacer(modifier = Modifier.height(20.dp))

// on below line adding a
// button to send an email
Button(onClick = {

    if( recevierMail.isNotEmpty() && subject.isNotEmpty() &&
body.isNotEmpty()) {
        val email = Email(
            id = null,
            recevierMail = recevierMail,
            subject = subject,
            body = body

        )
        databaseHelper.insertEmail(email)
        error = "Mail Saved"
    } else {
        error = "Please fill all fields"
    }
}

```

```

        // on below line we are creating
        // an intent to send an email
        val i = Intent(Intent.ACTION_SEND)

        // on below line we are passing email address,
        // email subject and email body
        val emailAddress = arrayOf(receiverMail)
        i.putExtra(Intent.EXTRA_EMAIL, emailAddress)
        i.putExtra(Intent.EXTRA_SUBJECT, subject)
        i.putExtra(Intent.EXTRA_TEXT, body)

        // on below line we are
        // setting type of intent
        i.setType("message/rfc822")

        // on the below line we are starting our activity to open email
        application.
            ctx.startActivity(Intent.createChooser(i, "Choose an Email client : "))

    },
    colors = ButtonDefaults.buttonColors(backgroundColor =
Color(0xFFd3e5ef))
) {
    // on the below line creating a text for our button.
    Text(
        // on below line adding a text ,
        // padding, color and font size.
        text = "Send Email",
        modifier = Modifier.padding(10.dp),
        color = Color.Black,
        fontSize = 15.sp
    )
}
}
}

```

```
}
```

ViewMailActivity.kt

```
package com.example.emailapplication
```

```
import android.annotation.SuppressLint
import android.os.Bundle
import android.util.Log
import androidx.activity.ComponentActivity
import androidx.activity.compose.setContent
import androidx.compose.foundation.Image
import androidx.compose.foundation.layout.*
import androidx.compose.foundation.layout.R
import androidx.compose.foundation.lazy.LazyColumn
import androidx.compose.foundation.lazy.LazyRow
import androidx.compose.foundation.lazy.items
import androidx.compose.material.*
import androidx.compose.runtime.Composable
import androidx.compose.ui.Modifier
import androidx.compose.ui.graphics.Color
import androidx.compose.ui.layout.ContentScale
import androidx.compose.ui.res.painterResource
import androidx.compose.ui.text.font.FontWeight
import androidx.compose.ui.text.style.TextAlign
import androidx.compose.ui.tooling.preview.Preview
import androidx.compose.ui.unit.dp
import androidx.compose.ui.unit.sp
import com.example.emailapplication.ui.theme.EmailApplicationTheme
```

```
class ViewMailActivity : ComponentActivity() {
    private lateinit var emailDatabaseHelper: EmailDatabaseHelper
    @SuppressLint("UnusedMaterialScaffoldPaddingParameter")
    override fun onCreate(savedInstanceState: Bundle?) {
```

```

super.onCreate(savedInstanceState)
emailDatabaseHelper = EmailDatabaseHelper(this)
setContent {

    Scaffold(
        // in scaffold we are specifying top bar.
        topBar = {
            // inside top bar we are specifying
            // background color.
            TopAppBar(backgroundColor = Color(0xFFadbef4), modifier =
Modifier.height(80.dp),
                // along with that we are specifying
                // title for our top bar.
                title = {
                    // in the top bar we are specifying
                    // title as a text
                    Text(
                        // on below line we are specifying
                        // text to display in top app bar.
                        text = "View Mails",
                        fontSize = 32.sp,
                        color = Color.Black,

                        // on below line we are specifying
                        // modifier to fill max width.
                        modifier = Modifier.fillMaxWidth(),

                        // on below line we are
                        // specifying text alignment.
                        textAlign = TextAlign.Center,
                    )
                }
            )
        }
    )
}
) {

```

```

        val data = emailDatabaseHelper.getAllEmails();
        Log.d("swathi", data.toString())
        val email = emailDatabaseHelper.getAllEmails()
        ListListScopeSample(email)
    }
}
}
}
@Composable
fun ListListScopeSample(email: List<Email>) {
    LazyRow(
        modifier = Modifier
            .fillMaxSize(),
        horizontalArrangement = Arrangement.SpaceBetween
    ) {
        item {
            LazyColumn {
                items(email) { email ->
                    Column(
                        modifier = Modifier.padding(
                            top = 16.dp,
                            start = 48.dp,
                            bottom = 20.dp
                        )
                    ) {
                        Text("Receiver_Mail: ${email.recevierMail}", fontWeight =
FontWeight.Bold)
                        Text("Subject: ${email.subject}")
                        Text("Body: ${email.body}")
                    }
                }
            }
        }
    }
}
}

```