


Google Calendar API & Google Meet Integration Guide

Step-by-step procedures corresponding to your screenshots.


Step 1: Open Google Cloud Console

Procedure: Open <https://console.cloud.google.com/>, sign in with your Google account and wait for the dashboard.

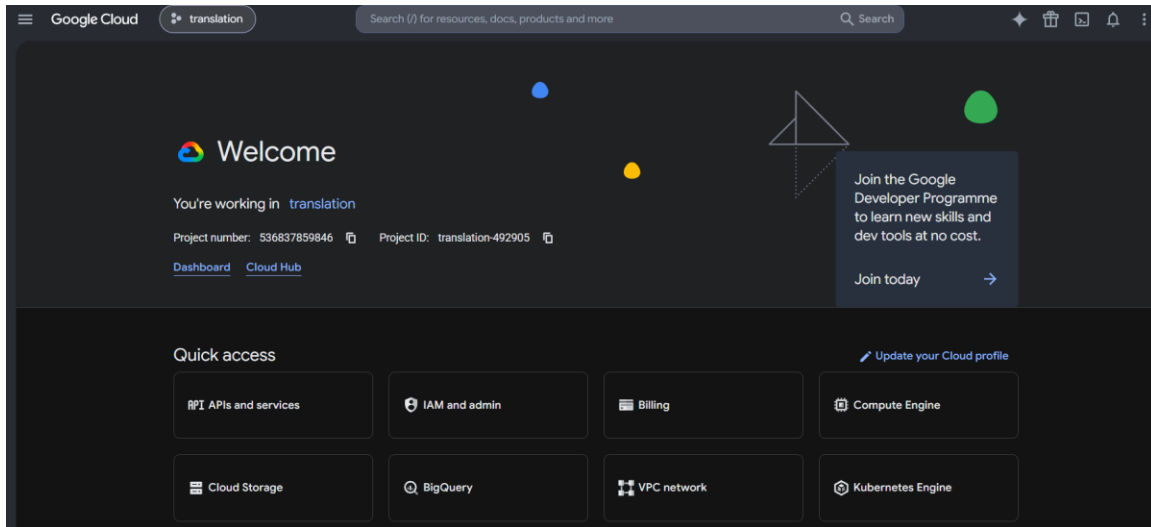


Step 2: Create a New Project

Procedure: Click the Project selector, choose New Project, and open the project creation window.

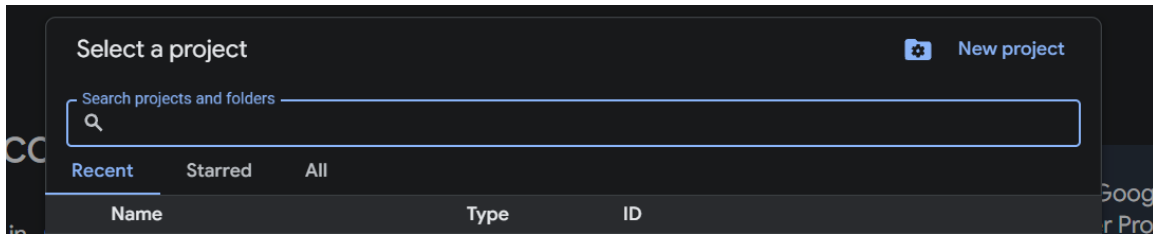


Step 3: Enter Project Details

Procedure: Provide a project name, choose an organization if applicable, and click Create.

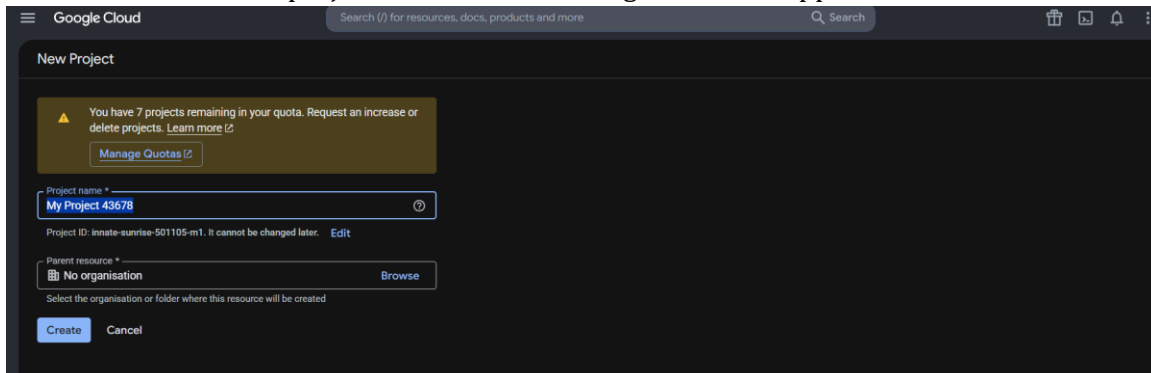


Step 4: Select the Created Project

Procedure: Select the newly created project.

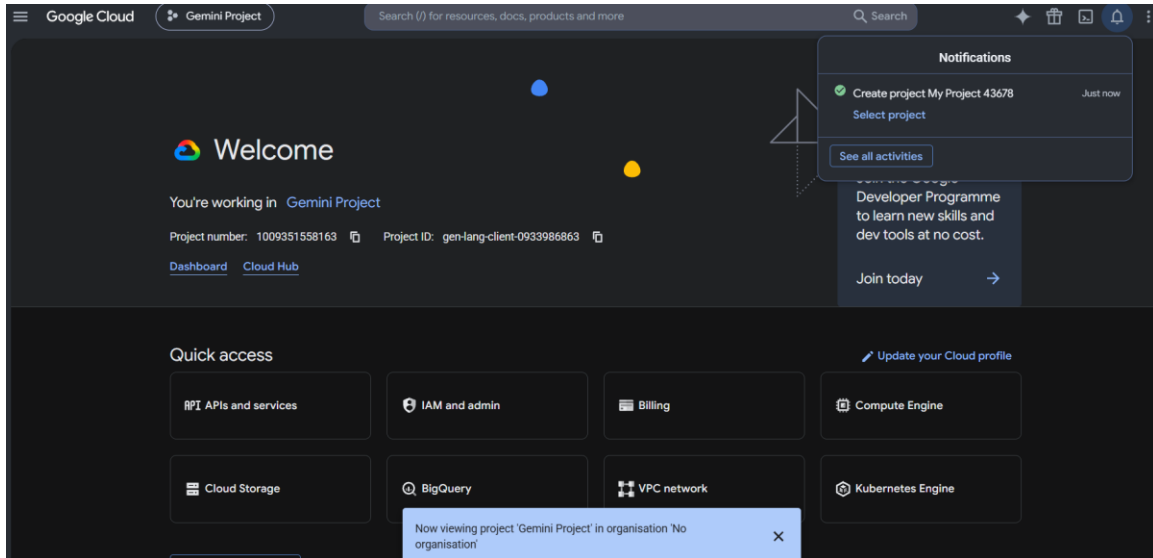


Step 5: Open APIs & Services

Procedure: Navigate to APIs & Services.

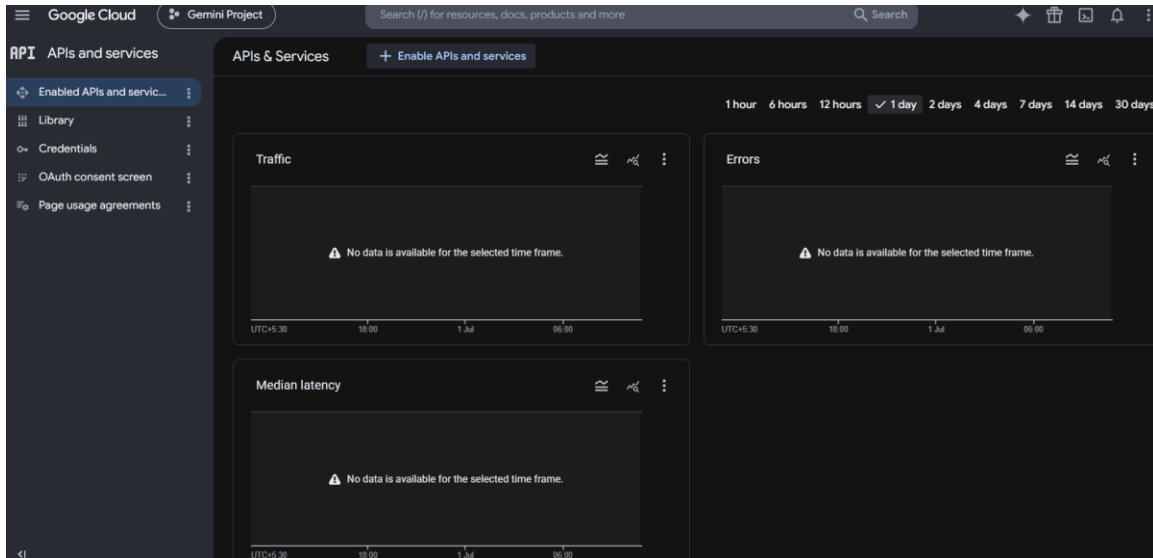


Step 6: Open API Library

Procedure: Click Library.

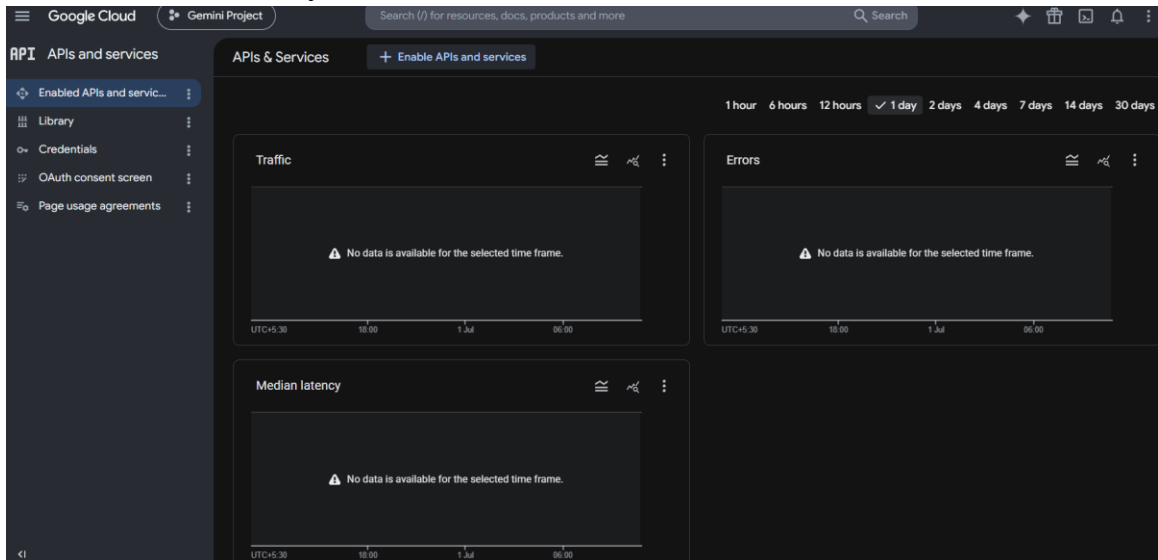


Step 7: Search Google Calendar API

Procedure: Search for Google Calendar API.

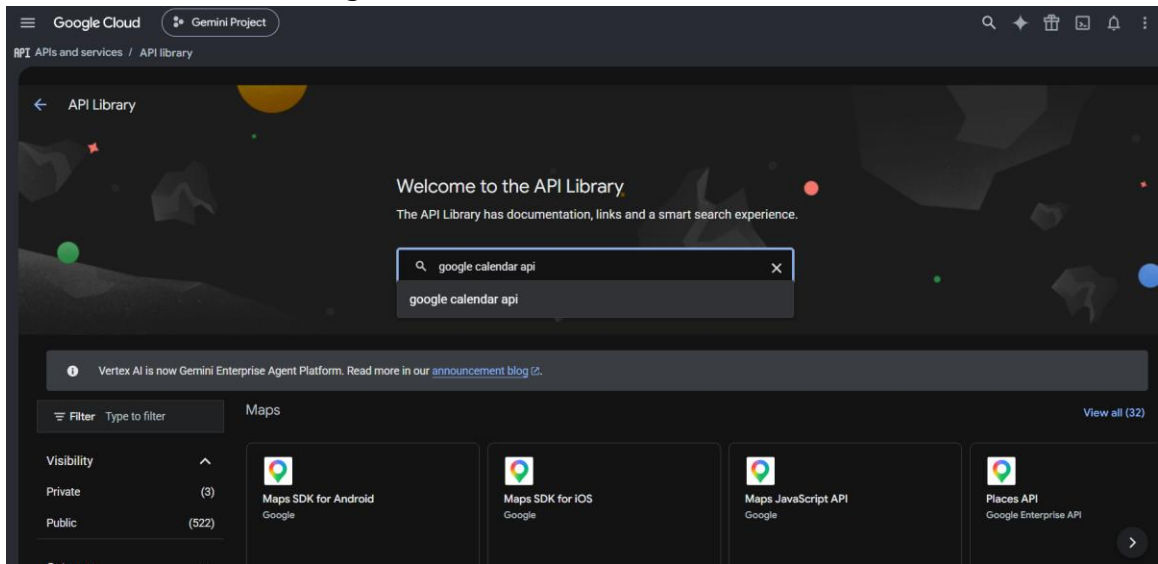


Step 8: Open Google Calendar API

Procedure: Click the API from the search results.

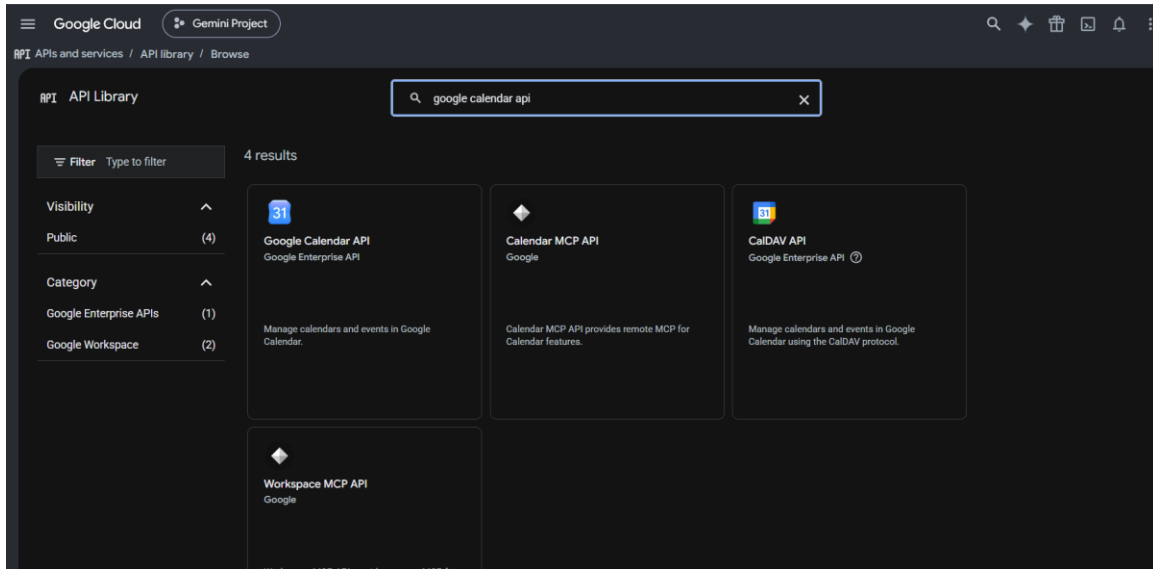


Step 9: Enable Google Calendar API

Procedure: Click Enable.

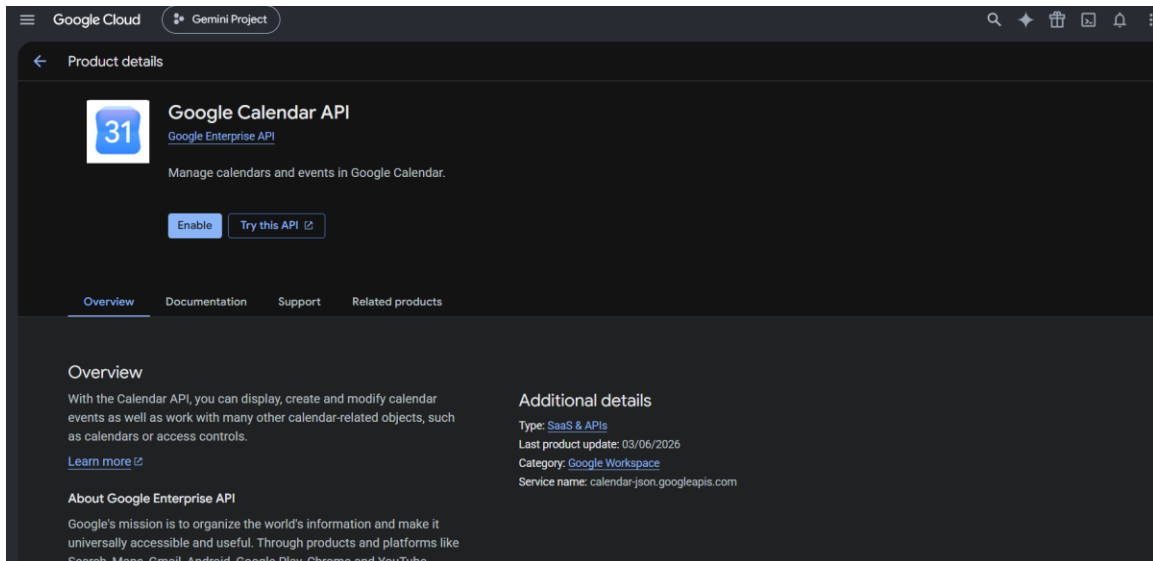


Step 10: Verify API Status

Procedure: Confirm the API status is Enabled.

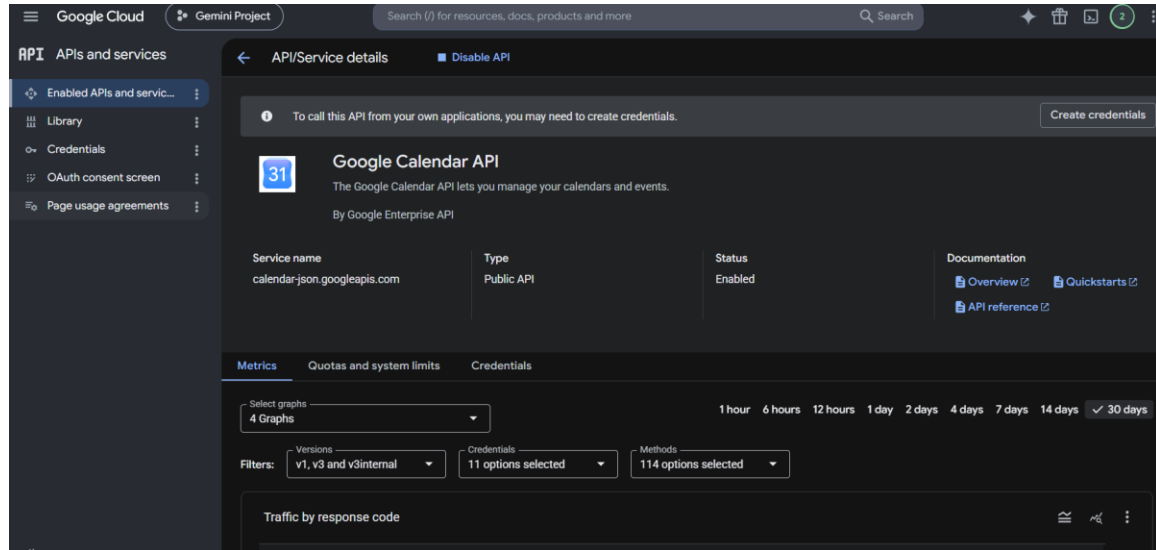


Step 11: Open OAuth Consent Screen

Procedure: Open OAuth consent screen.

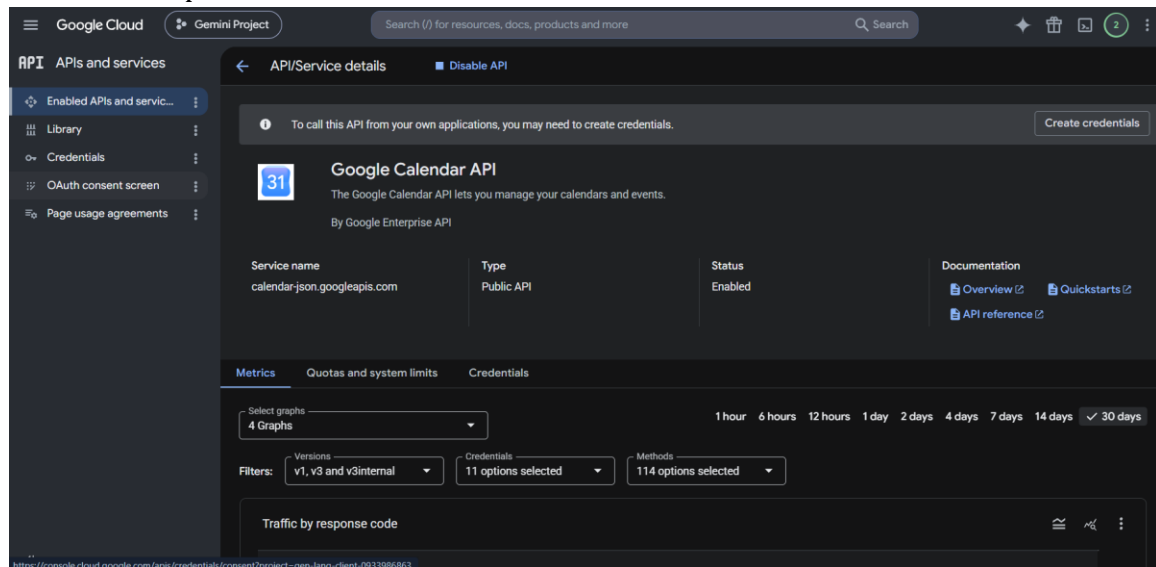


Step 12: Click Get Started

Procedure: Begin OAuth configuration.

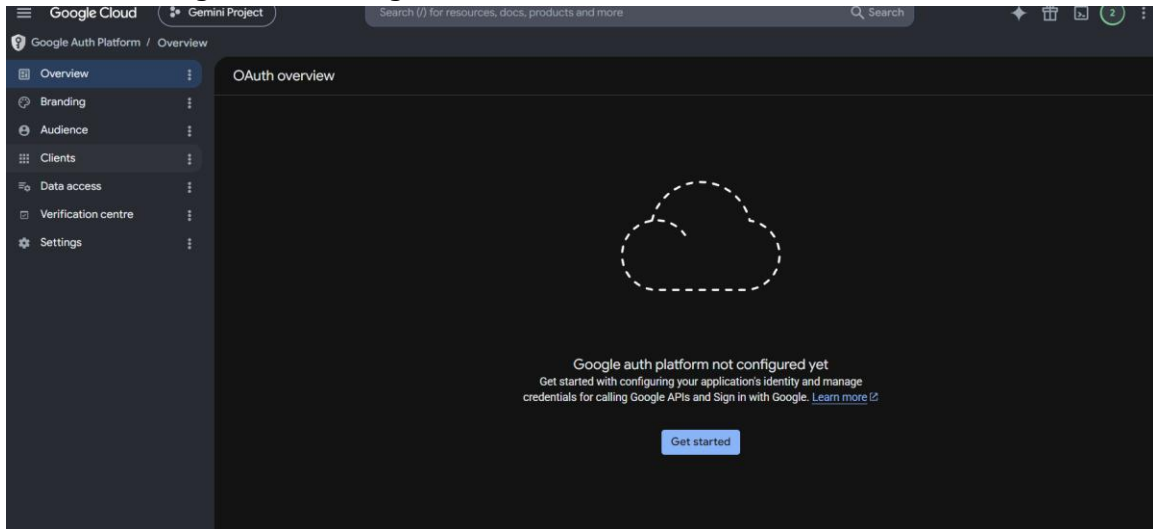

Step 13: Configure App Information

Procedure: Enter the application name and support email.

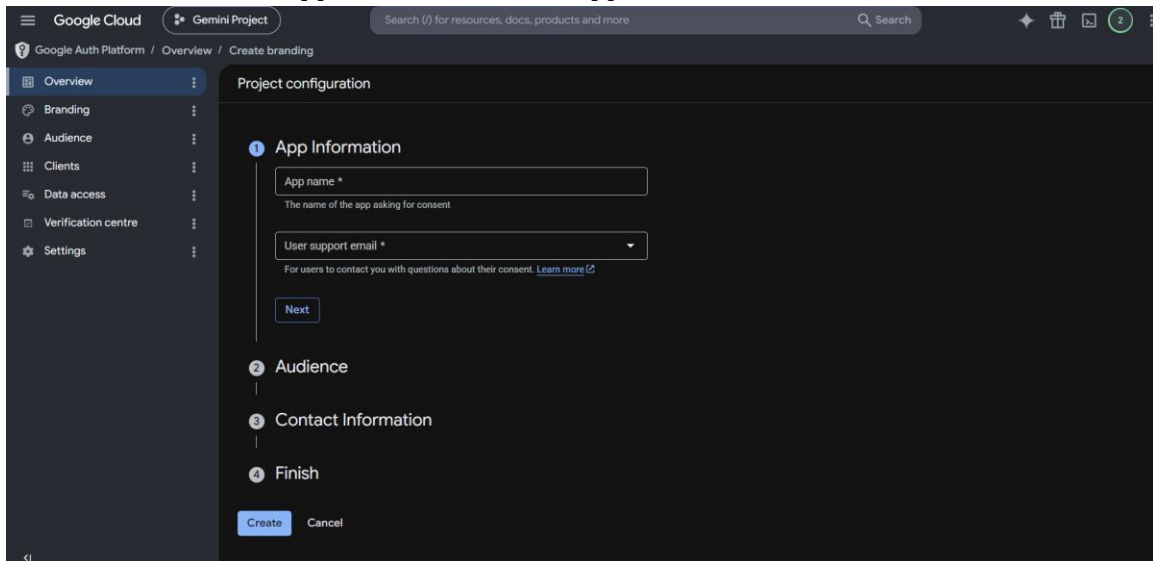

Step 14: Configure Audience

Procedure: Select External.

The screenshot shows the 'Project configuration' page for a Gemini Project. The left sidebar contains a navigation menu with 'Overview' selected. The main content area is titled 'Project configuration' and shows a progress bar with four steps: 1. Overview, 2. Audience (current), 3. Contact Information, and 4. Finish. Under the 'Audience' step, there are two radio button options: 'Internal' and 'External'. The 'External' option is selected. Below the options, there is a 'Next' button. The 'Internal' option has a description: 'Only available to users within your organisation. You will not need to submit your app for verification. [Learn more about user type](#)'. The 'External' option has a description: 'Available to any test user with a Google Account. Your app will start in testing mode and will only be available to users that you add to the list of test users. Once your app is ready to push to production, you may need to verify your app. [Learn more about user type](#)'.


Step 15: Enter Contact Information

Procedure: Provide the developer email.

The screenshot shows the 'Project configuration' page for a Gemini Project, now at Step 3: Contact Information. The left sidebar is the same. The main content area shows a progress bar with four steps: 1. Overview, 2. Audience, 3. Contact Information (current), and 4. Finish. Under the 'Contact Information' step, there is a text input field labeled 'Email addresses *'. Below the field, there is a red error message: 'Enter at least one email'. A 'Next' button is visible below the input field. At the bottom of the page, there are 'Create' and 'Cancel' buttons.


Step 16: Review Configuration

Procedure: Review the information.

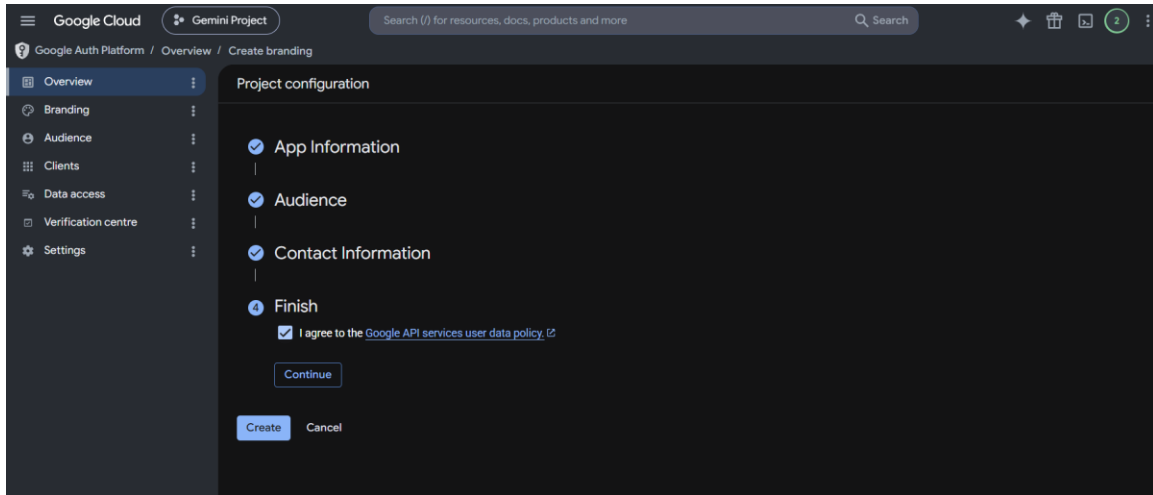


Step 17: Create OAuth Configuration

Procedure: Click Create.

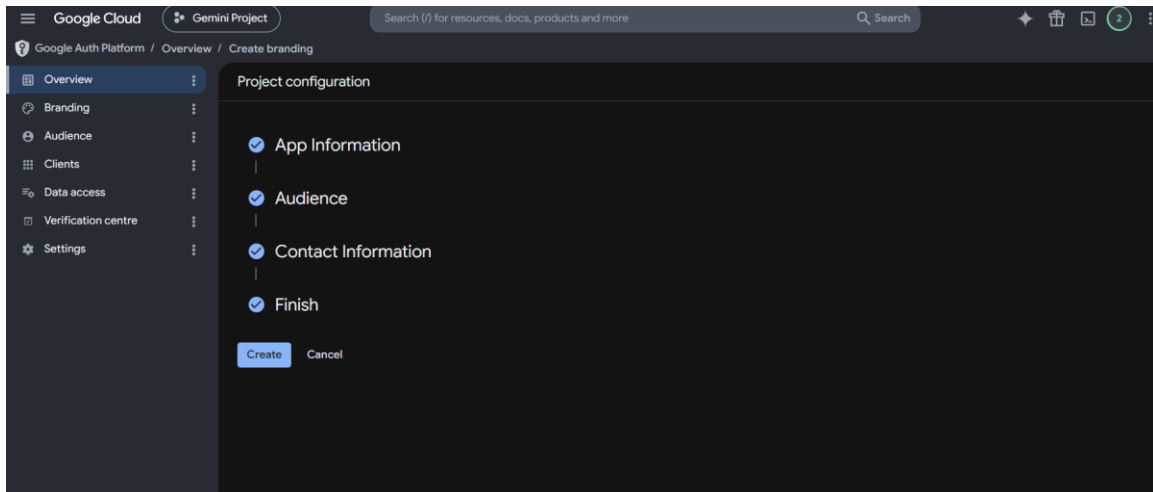


Step 18: Verify OAuth Overview

Procedure: Confirm OAuth configuration completed.

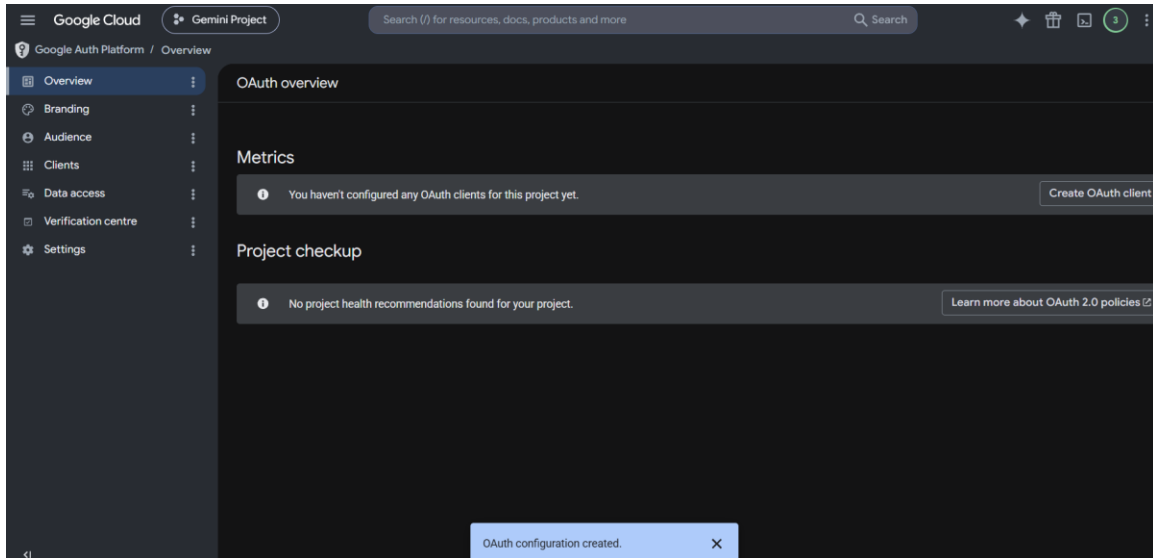

Step 19: Create OAuth Client

Procedure: Choose Web Application.

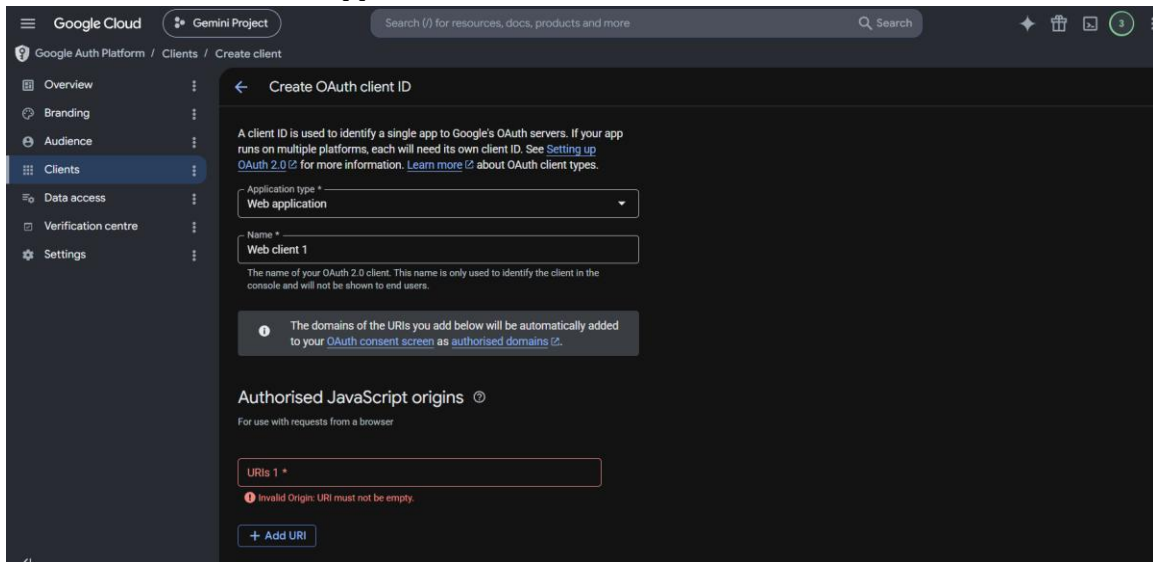

Step 20: Configure OAuth Client

Procedure: Add JavaScript Origin and Redirect URI.

Google Cloud Gemini Project Search (/) for resources, docs, products and more

Google Auth Platform / Clients / Create client

Overview
Branding
Audience
Clients
Data access
Verification centre
Settings

Create OAuth client ID

Authorized JavaScript origins ⓘ
For use with requests from a browser

URIs 1 +
http://localhost:3000

+ Add URI

Authorized redirect URIs ⓘ
For use with requests from a web server

URIs 1 +
http://localhost:3000/auth/google/callback

+ Add URI

Note: It may take five minutes to a few hours for settings to take effect

Create Cancel

Step 21: Copy Client Credentials

Procedure: Copy Client ID

Google Cloud Gemini Project Search (/) for resources, docs, products and more

Google Auth Platform / Clients / Create client

Overview
Branding
Audience
Clients
Data access
Verification centre
Settings

Create OAuth client ID

Authorized JavaScript origins ⓘ
For use with requests from a browser

URIs 1 +
http://localhost:3000

+ Add URI

Authorized redirect URIs ⓘ
For use with requests from a web server

URIs 1 +
http://localhost:3000/auth/google/callback

+ Add URI

Note: It may take five minutes to a few hours for settings to take effect

Create Cancel

OAuth client created

The client ID can always be accessed from the Clients tab under the Google Auth Platform.

OAuth access is restricted to the [test users](#) listed on your [OAuth consent screen](#)

Client ID
1009351558163-91f5nci5t5qa0d86v51482c661lou64.apps.googleusercontent.com


Download JSON

OK

OAuth client created


Step 22: Open Web Client

Procedure: Open the created client.

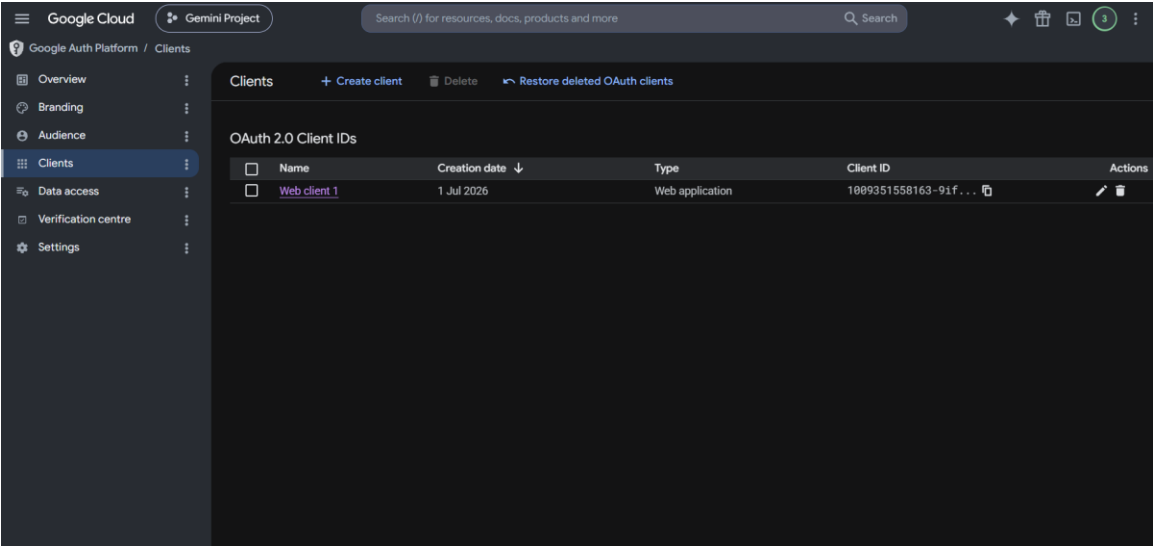

Step 23: Verify Client Details

Procedure: Verify client configuration. Copy both client and secret id

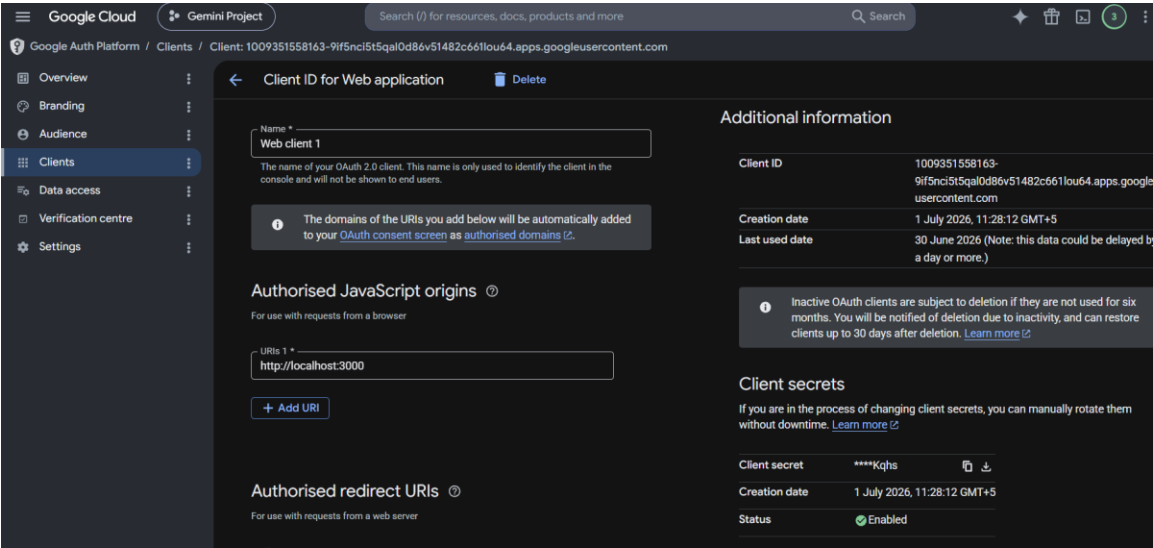

Step 24: Open OAuth Playground

Procedure: Open the OAuth Playground website.

<https://developers.google.com/oauthplayground/>



OAuth 2.0 Playground

Step 1 Select & authorize APIs

Request / Response

Select the scope for the APIs you would like to access or input your own OAuth scopes below. Then click the "Authorize APIs" button.

AI Platform Training & Prediction API v1

API Gateway API v1

API Keys API v2

API Management API v1alpha

API hub API v1

Access Approval API v1

Access Context Manager API v1

Ad Exchange Buyer API II v2beta1

AdMob API v1

Authorize APIs

Step 2 Exchange authorization code for tokens

Step 3 Configure request to API ☐ Wrap Lines

No request.

Step 25: Open Settings

Procedure: Click the gear icon.



OAuth 2.0 Playground

Step 1 Select & authorize APIs

Request / Response

Select the scope for the APIs you would like to access or input your own OAuth scopes below. Then click the "Authorize APIs" button.

AI Platform Training & Prediction API v1

API Gateway API v1

API Keys API v2

API Management API v1alpha

API hub API v1

Access Approval API v1

Access Context Manager API v1

Ad Exchange Buyer API II v2beta1

AdMob API v1

Authorize APIs

Step 2 Exchange authorization code for tokens

Step 3 Configure request to API ☐ Wrap Lines

No request.

Step 26: Use Your Own OAuth Credentials

Procedure: Select use your own OAuth credentials and Paste Client ID and Client Secret.

The screenshot shows the Google Developers OAuth 2.0 Playground interface. The top bar includes the Google Developers logo and a title bar for the 'OAuth 2.0 Playground' window. The main area is divided into three sections: 'Step 1: Select and authorize APIs', 'Request / Response', and 'OAuth 2.0 configuration'. In the 'Step 1' section, a list of APIs is shown, including 'AI Platform Training & Prediction API v1', 'API Gateway API v1', 'API Keys API v2', 'API Management API v1alpha', 'API hub API v1', 'Access Approval API v1', 'Access Context Manager API v1', 'Ad Exchange Buyer API II v2beta1', and 'AdMob API v1'. Below this list is a text input field for 'Input your own scopes' and an 'Authorize APIs' button. The 'Request / Response' section shows 'No request.' and a 'Wrap Lines' checkbox. The 'OAuth 2.0 configuration' section on the right contains settings for 'OAuth flow' (Server-side), 'OAuth endpoints' (Google), 'Authorization endpoint' (https://accounts.google.com/o/oauth2/v2/auth/), 'Token endpoint' (https://oauth2.googleapis.com/token), 'Access token location' (Authorization header w/ Bearer prefix), 'Access type' (Offline), and 'Force prompt' (Consent Screen). The 'Use your own OAuth credentials' checkbox is checked. Below this, the 'OAuth Client ID' is set to 'Client ID' and the 'OAuth Client secret' is set to 'Client secret'. A note states: 'You will need to list the URL https://developers.google.com/oauthplayground as a valid redirect URI in your Google APIs Console's project. Then enter the client ID and secret assigned to a web application on your project below.' A 'Close' button is at the bottom of the configuration panel.

Step 27: Authorize APIs

Procedure: Select the Calendar scope and authorize.

This screenshot is similar to the previous one, showing the Google Developers OAuth 2.0 Playground interface. The 'Step 1: Select and authorize APIs' section is the same. However, the 'Input your own scopes' field now contains the URL 'https://www.googleapis.com/auth/calendar'. The 'Authorize APIs' button is highlighted in blue. The 'Request / Response' section remains 'No request.' with the 'Wrap Lines' checkbox. The 'OAuth 2.0 configuration' section on the right is also the same, with the 'Use your own OAuth credentials' checkbox checked. The 'OAuth Client ID' is now '1009351558163-91f5nc55qal0d96v51482c601ouf' and the 'OAuth Client secret' is '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'. The same note about listing the URL as a valid redirect URI is present, along with the 'Close' button.

Step 28: Sign in to Google

Procedure: Grant permissions.

Step 29: Generate Refresh Token

Procedure: Exchange the authorization code for tokens and copy the Refresh Token.

Google Developers

OAuth 2.0 Playground

Step 1 Select & authorize APIs

Step 2 Exchange authorization code for tokens

Step 3 Configure request to API

Request / Response

No request.

Once you got the Authorization Code from Step 1 click the **Exchange authorization code for tokens** button, you will get a refresh and an access token which is required to access OAuth protected resources.

Authorization code: 4/0AQSTgQFxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxx

Exchange authorization code for tokens

Refresh token: 1/0gxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxx

Access token: ya29 a0AH8SMAxxxxxxxxxxxxxxxxxxxxxxxx Refresh access token

☒ Auto-refresh the token before it expires.

Note: The OAuth Playground will automatically revoke refresh tokens after 24h. You can avoid this by specifying your own application OAuth credentials using the Configuration panel.

☐ Wrap Lines

Step 30:

Procedure: After successfully completing the OAuth authorization process, the OAuth Playground will generate the required authentication credentials.

Copy the following values and store them securely:

- **Client ID**
- **Client Secret**
- **Refresh Token**