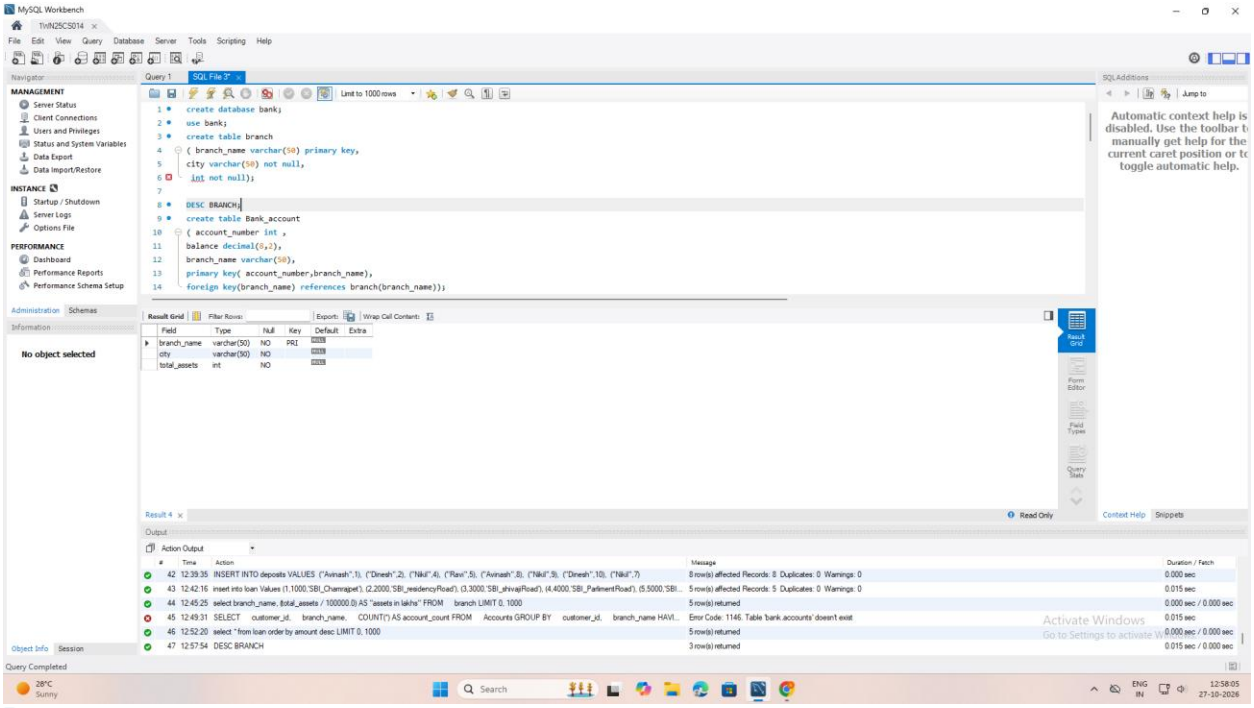
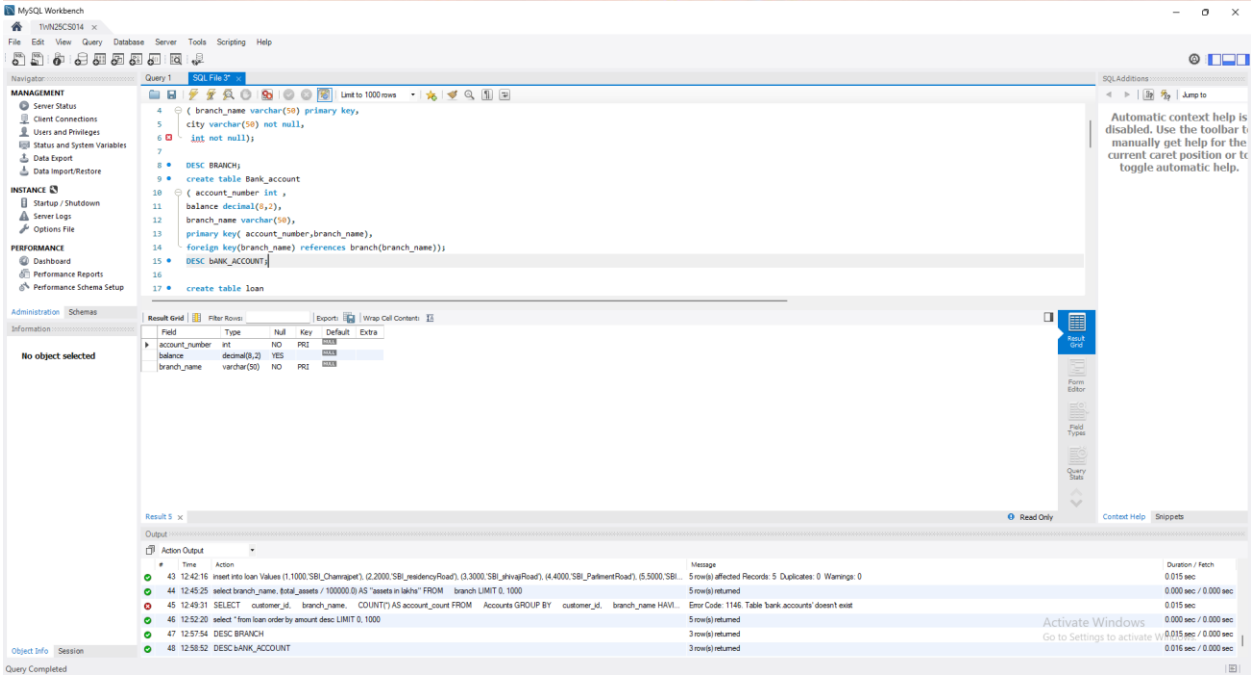
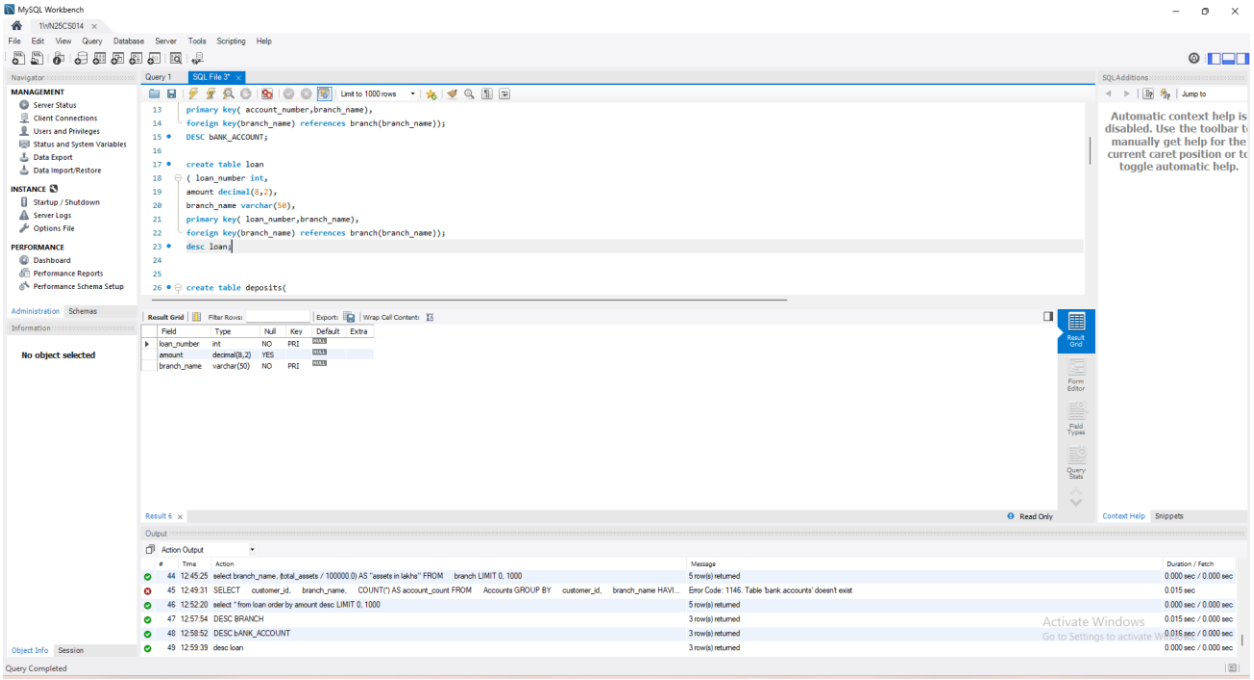
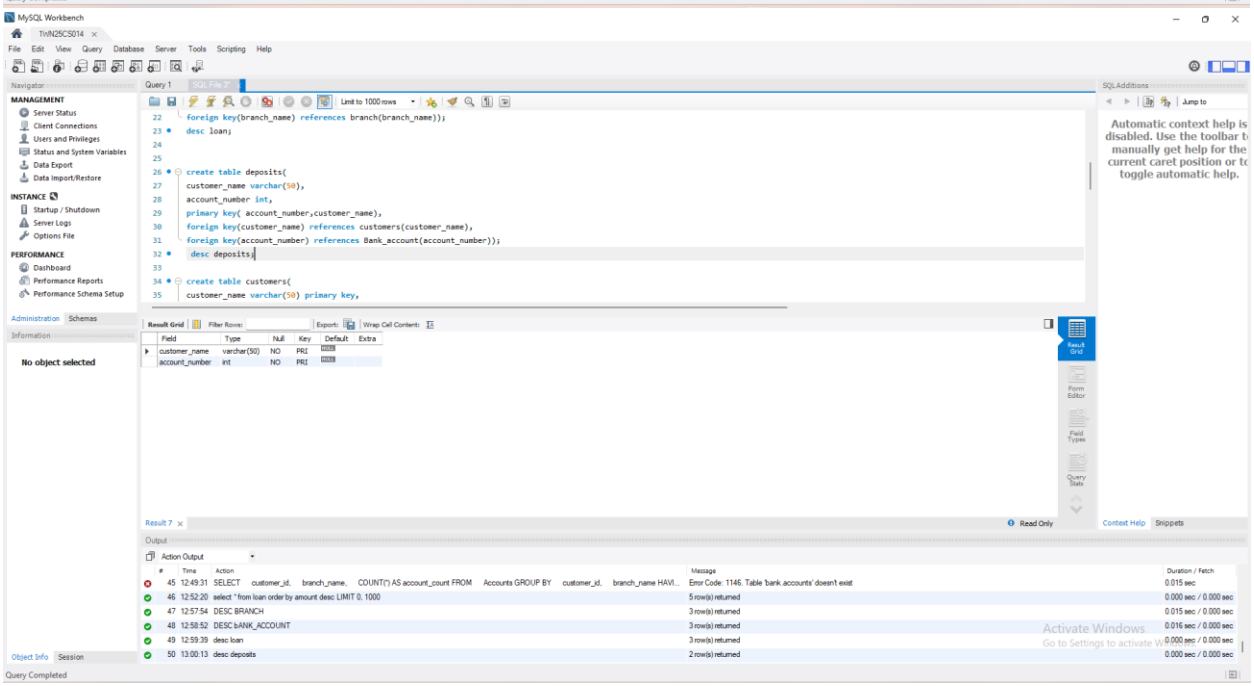
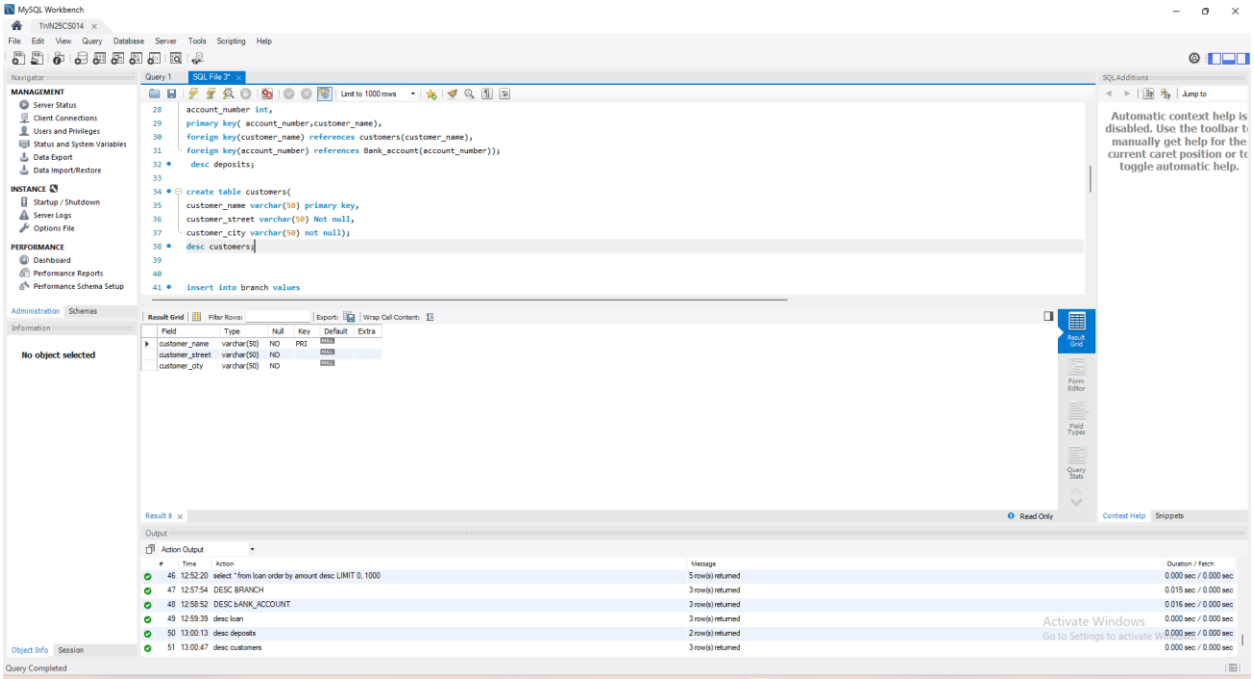
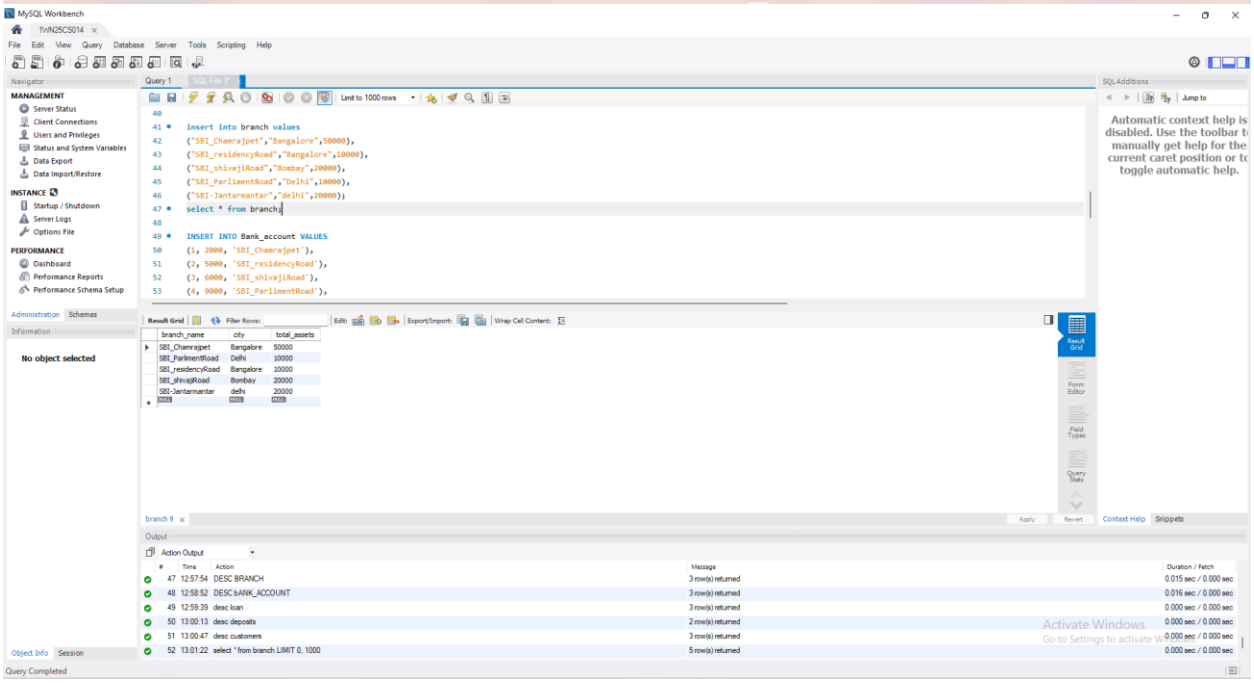

MySQL Workbench
create database bank;
use bank;
create table branch
(branch_name varchar(50) primary key,
city varchar(50) not null,
int not null);
DESC BRANCH;
create table Bank_account
(account_number int ,
balance decimal(8,2),
branch_name varchar(50),
primary key(account_number,branch_name),
foreign key(branch_name) references branch(branch_name));
No object selected
Automatic context help is disabled. Use the toolbar to manually get help for the current caret position or to toggle automatic help.
Query Completed

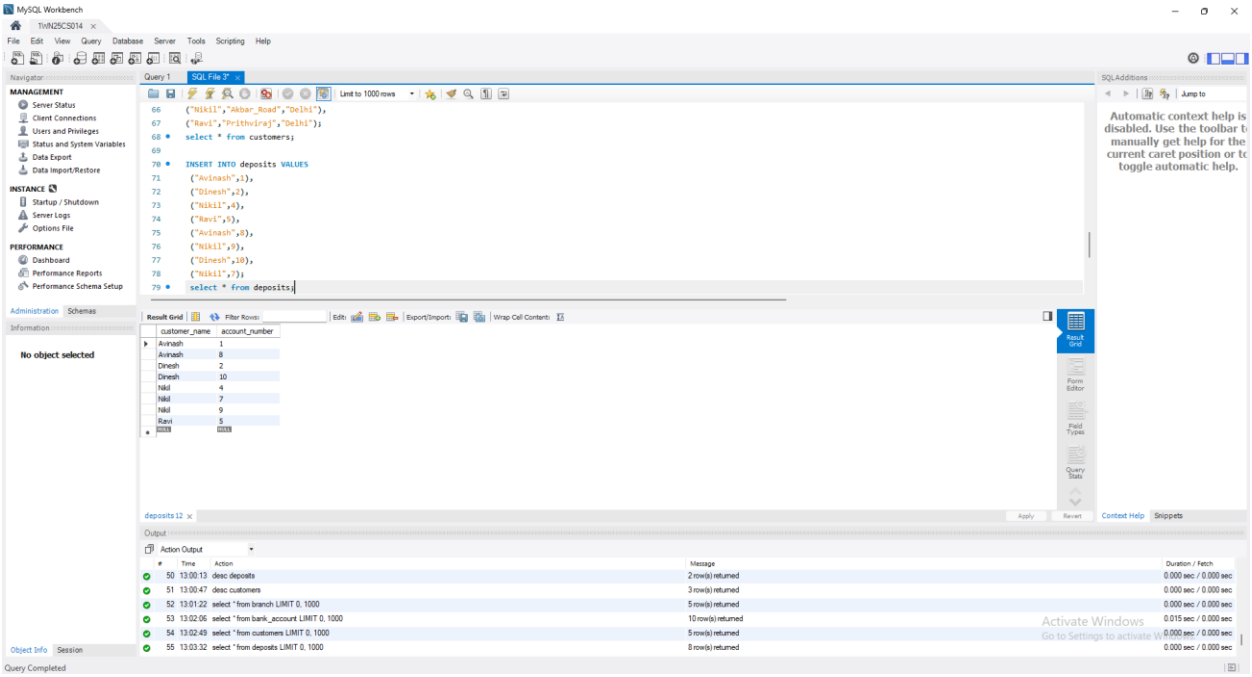

MySQL Workbench
(branch_name varchar(50) primary key,
city varchar(50) not null,
int not null);
DESC BRANCH;
create table Bank_account
(account_number int ,
balance decimal(8,2),
branch_name varchar(50),
primary key(account_number,branch_name),
foreign key(branch_name) references branch(branch_name));
DESC bANK_ACCOUNT;
create table loan
No object selected
Automatic context help is disabled. Use the toolbar to manually get help for the current caret position or to toggle automatic help.
Query Completed

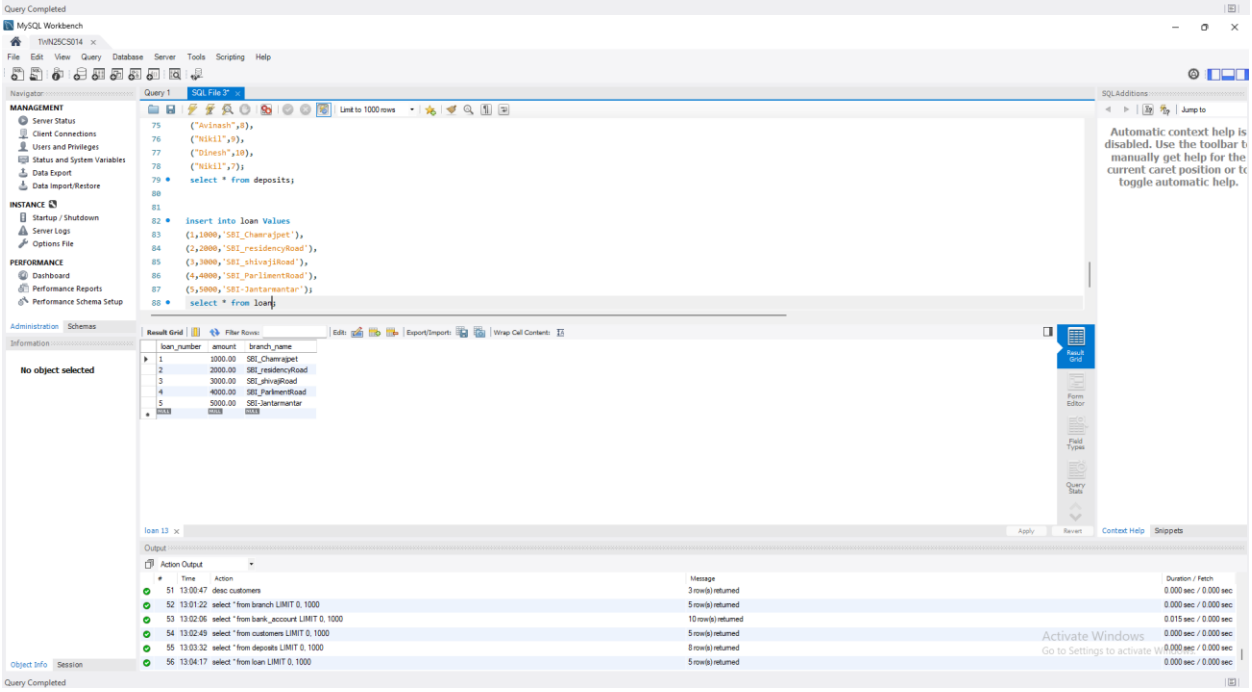

MySQL Workbench
primary key(account_number,branch_name),
foreign key(branch_name) references branch(branch_name));
DESC bANK_ACCOUNT;
create table loan
(loan_number int,
amount decimal(8,2),
branch_name varchar(50),
primary key(loan_number,branch_name),
foreign key(branch_name) references branch(branch_name));
desc loan;
create table deposits(
No object selected
Automatic context help is disabled. Use the toolbar to manually get help for the current caret position or to toggle automatic help.
Query Completed

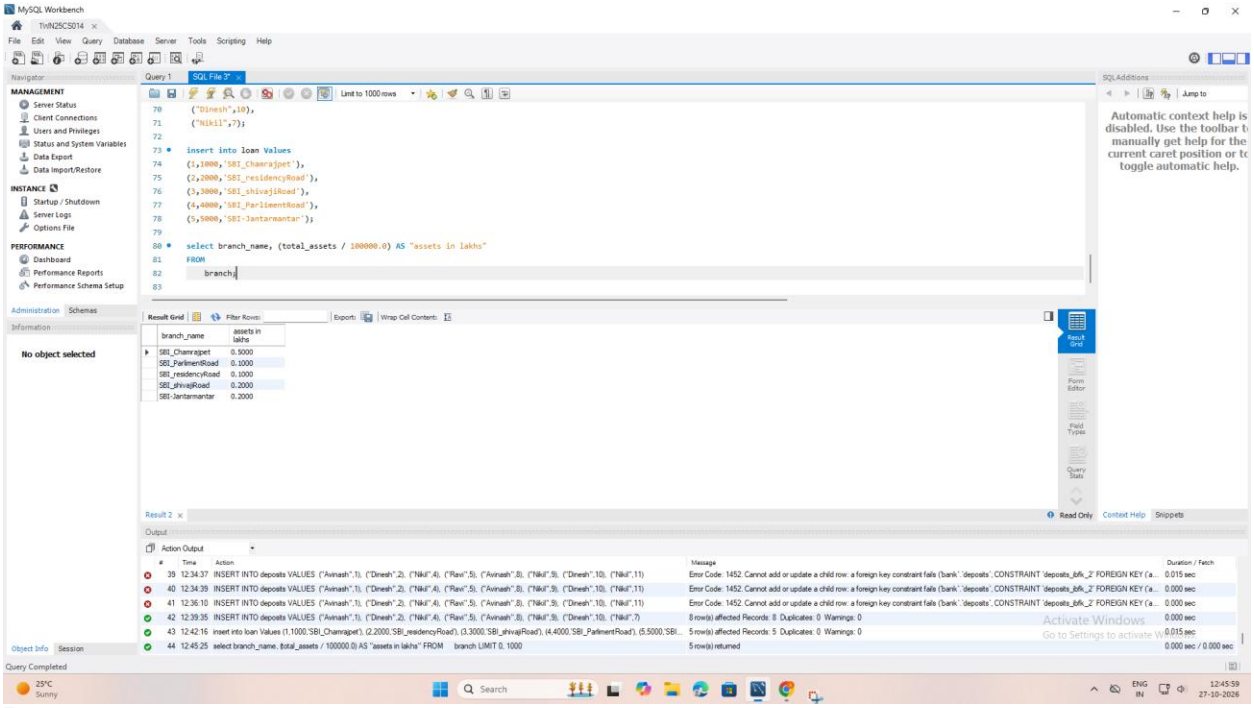

MySQL Workbench
foreign key(branch_name) references branch(branch_name));
desc loan;
create table deposits(
customer_name varchar(50),
account_number int,
primary key(account_number,customer_name),
foreign key(customer_name) references customers(customer_name),
foreign key(account_number) references Bank_account(account_number));
desc deposits;
create table customers(
customer_name varchar(50) primary key,
No object selected
Automatic context help is disabled. Use the toolbar to manually get help for the current caret position or to toggle automatic help.
Query Completed

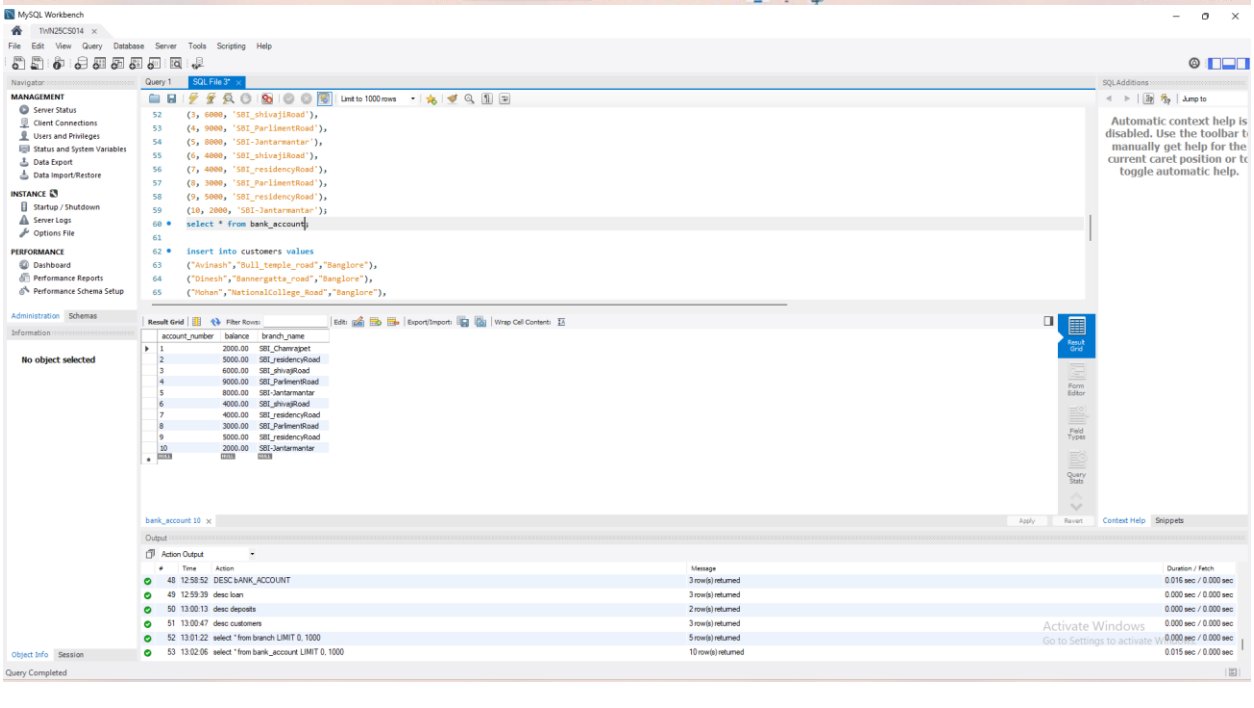

MySQL Workbench
TWN25CS014
File Edit View Query Database Server Tools Scripting Help
Navigator
MANAGEMENT
Server Status
Client Connections
Users and Privileges
Status and System Variables
Data Export
Data Import/Restore
INSTANCE
Startup / Shutdown
Server Logs
Options File
PERFORMANCE
Dashboard
Performance Reports
Performance Schema Setup
Administration Schemas
Information
No object selected
Query 1
SQL File 3*
Limit to 1000 rows
account_number int,
primary key(account_number,customer_name),
foreign key(customer_name) references customers(customer_name),
foreign key(account_number) references Bank_account(account_number));
desc deposits;
create table customers(
customer_name varchar(50) primary key,
customer_street varchar(50) Not null,
customer_city varchar(50) not null);
desc customers;
insert into branch values
Result Grid
Filter Rows:
Export:
Wrap Cell Content:
Field Type Null Key Default Extra
customer_name varchar(50) NO PRI NULL
customer_street varchar(50) NO NULL
customer_city varchar(50) NO NULL
Result 8
Read Only
SQLAdditions
Jump to
Automatic context help is disabled. Use the toolbar to manually get help for the current caret position or to toggle automatic help.
Context Help
Snippets
Output
Action Output
Time Action Message Duration / Fetch
46 12:52:20 select * from loan order by amount desc LIMIT 0, 1000 5 row(s) returned 0.000 sec / 0.000 sec
47 12:57:54 DESC BRANCH 3 row(s) returned 0.015 sec / 0.000 sec
48 12:58:52 DESC bANK_ACCOUNT 3 row(s) returned 0.016 sec / 0.000 sec
49 12:59:39 desc loan 3 row(s) returned 0.000 sec / 0.000 sec
50 13:00:13 desc deposits 2 row(s) returned 0.000 sec / 0.000 sec
51 13:00:47 desc customers 3 row(s) returned 0.000 sec / 0.000 sec
Object Info Session
Query Completed
Activate Windows
Go to Settings to activate Windows.

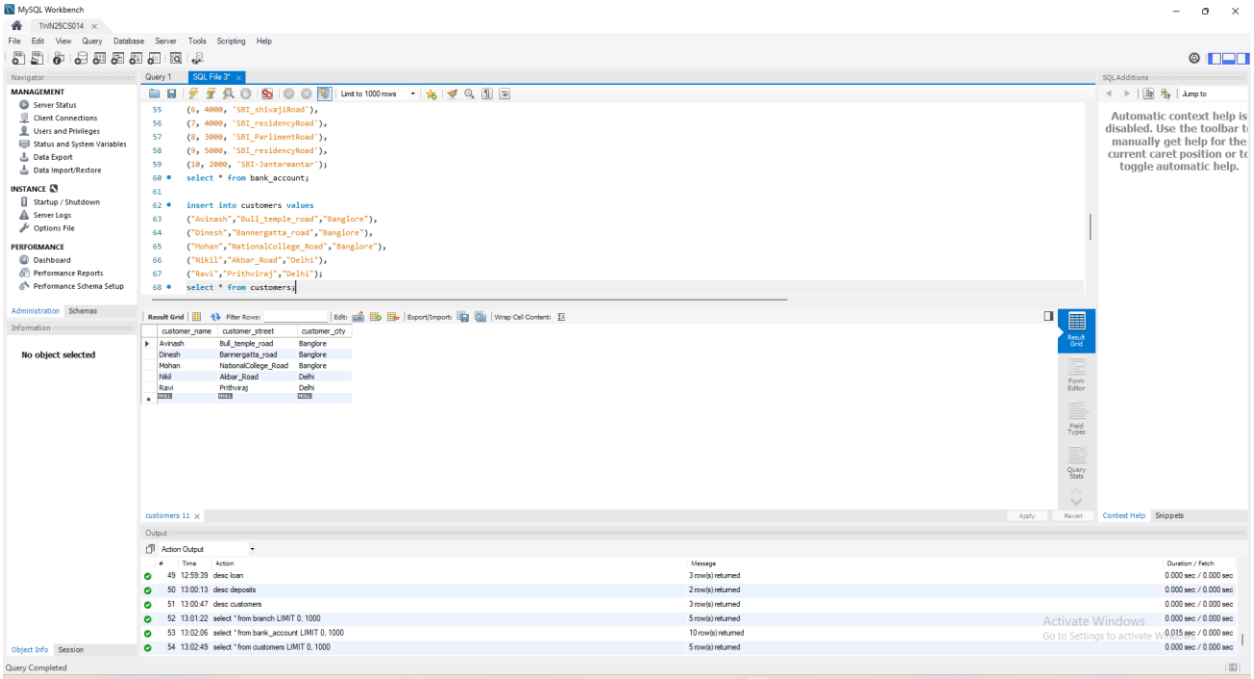

MySQL Workbench
TWN25CS014
File Edit View Query Database Server Tools Scripting Help
Navigator
MANAGEMENT
Server Status
Client Connections
Users and Privileges
Status and System Variables
Data Export
Data Import/Restore
INSTANCE
Startup / Shutdown
Server Logs
Options File
PERFORMANCE
Dashboard
Performance Reports
Performance Schema Setup
Administration Schemas
Information
No object selected
Query 1
SQL File 3*
Limit to 1000 rows
insert into branch values
("SBI_Chamrajpet","Bangalore",50000),
("SBI_residencyRoad","Bangalore",10000),
("SBI_shivajiRoad","Bombay",20000),
("SBI_ParlimentRoad","Delhi",10000),
("SBI-Jantarmantar","delhi",20000);
select * from branch;
INSERT INTO Bank_account VALUES
(1, 2000, 'SBI_Chamrajpet'),
(2, 5000, 'SBI_residencyRoad'),
(3, 6000, 'SBI_shivajiRoad'),
(4, 9000, 'SBI_ParlimentRoad'),
Result Grid
Filter Rows:
Edit:
Export/Import:
Wrap Cell Content:
branch_name city total_assets
SBI_Chamrajpet Bangalore 50000
SBI_ParlimentRoad Delhi 10000
SBI_residencyRoad Bangalore 10000
SBI_shivajiRoad Bombay 20000
SBI-Jantarmantar delhi 20000
branch 9
Apply
Revert
SQLAdditions
Jump to
Automatic context help is disabled. Use the toolbar to manually get help for the current caret position or to toggle automatic help.
Context Help
Snippets
Output
Action Output
Time Action Message Duration / Fetch
47 12:57:54 DESC BRANCH 3 row(s) returned 0.015 sec / 0.000 sec
48 12:58:52 DESC bANK_ACCOUNT 3 row(s) returned 0.016 sec / 0.000 sec
49 12:59:39 desc loan 3 row(s) returned 0.000 sec / 0.000 sec
50 13:00:13 desc deposits 2 row(s) returned 0.000 sec / 0.000 sec
51 13:00:47 desc customers 3 row(s) returned 0.000 sec / 0.000 sec
52 13:01:22 select * from branch LIMIT 0, 1000 5 row(s) returned 0.000 sec / 0.000 sec
Object Info Session
Query Completed
Activate Windows
Go to Settings to activate Windows.

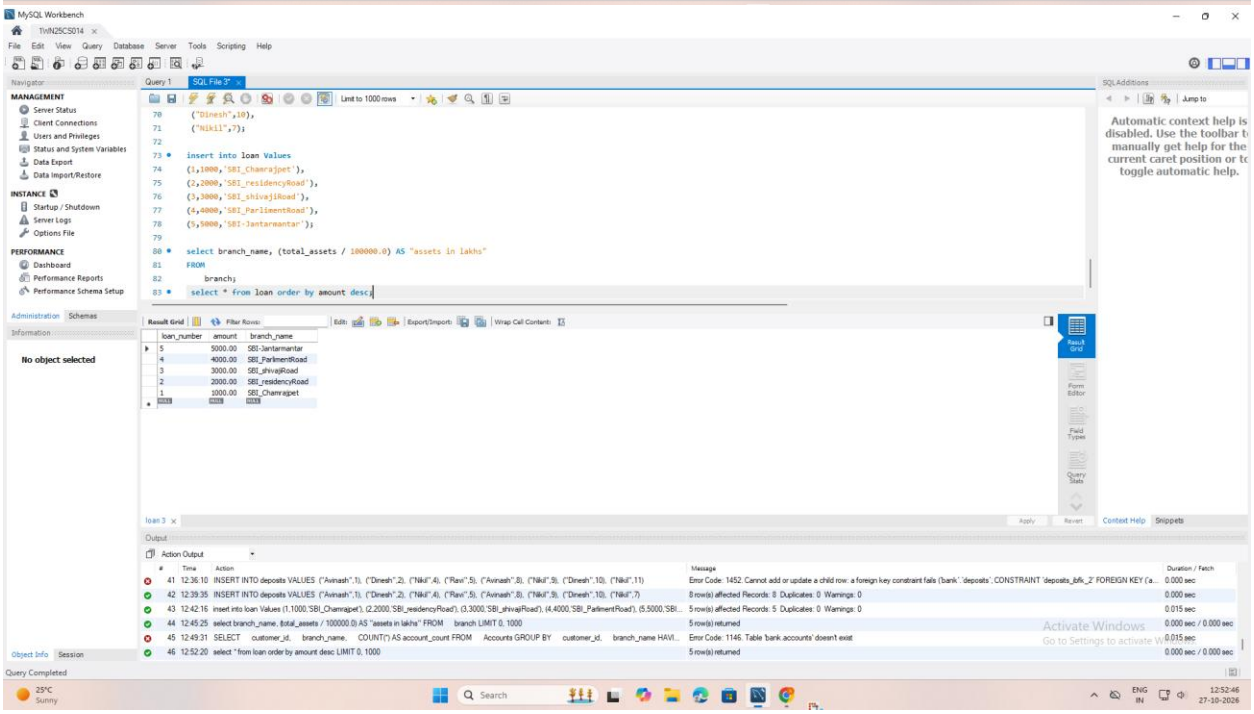

MySQL Workbench
("Nikil","Akbar_Road","Delhi"),
("Ravi","Prithviraj","Delhi");
select * from customers;
INSERT INTO deposits VALUES
("Avinash",1),
("Dinesh",2),
("Nikil",4),
("Ravi",5),
("Avinash",8),
("Nikil",9),
("Dinesh",10),
("Nikil",7);
select * from deposits;
customer_name account_number
Avinash 1
Avinash 8
Dinesh 2
Dinesh 10
Nikil 4
Nikil 7
Nikil 9
Ravi 5
No object selected
Activate Windows


MySQL Workbench
("Avinash",8),
("Nikil",9),
("Dinesh",10),
("Nikil",7);
select * from deposits;
insert into loan Values
(1,1000,'SBI_Chamrajpet'),
(2,2000,'SBI_residencyRoad'),
(3,3000,'SBI_shivajiRoad'),
(4,4000,'SBI_ParlimentRoad'),
(5,5000,'SBI-Jantarmantar');
select * from loan;
loan_number amount branch_name
1 1000.00 SBI_Chamrajpet
2 2000.00 SBI_residencyRoad
3 3000.00 SBI_shivajiRoad
4 4000.00 SBI_ParlimentRoad
5 5000.00 SBI-Jantarmantar
No object selected
Activate Windows


MySQL Workbench
("Dinesh",10),
("Nikil",7);
insert into loan Values
(1,1000,'SBI_Chamrajpet'),
(2,2000,'SBI_residencyRoad'),
(3,3000,'SBI_shivajiRoad'),
(4,4000,'SBI_ParlimentRoad'),
(5,5000,'SBI-Jantarmantar');
select branch_name, (total_assets / 100000.0) AS "assets in lakhs"
FROM
branch;
branch_name
assets in lakhs
SBI_Chamrajpet 0.5000
SBI_ParlimentRoad 0.1000
SBI_residencyRoad 0.1000
SBI_shivajiRoad 0.2000
SBI-Jantarmantar 0.2000
Automatic context help is disabled. Use the toolbar to manually get help for the current caret position or to toggle automatic help.
Activate Windows
Go to Settings to activate Windows.


MySQL Workbench
(3, 6000, 'SBI_shivajiRoad'),
(4, 9000, 'SBI_ParlimentRoad'),
(5, 8000, 'SBI-Jantarmantar'),
(6, 4000, 'SBI_shivajiRoad'),
(7, 4000, 'SBI_residencyRoad'),
(8, 3000, 'SBI_ParlimentRoad'),
(9, 5000, 'SBI_residencyRoad'),
(10, 2000, 'SBI-Jantarmantar');
select * from bank_account;
insert into customers values
("Avinash","Bull_temple_road","Banglore"),
("Dinesh","Bannergatta_road","Banglore"),
("Mohan","NationalCollege_Road","Banglore"),
account_number balance branch_name
1 2000.00 SBI_Chamrajpet
2 5000.00 SBI_residencyRoad
3 6000.00 SBI_shivajiRoad
4 9000.00 SBI_ParlimentRoad
5 8000.00 SBI-Jantarmantar
6 4000.00 SBI_shivajiRoad
7 4000.00 SBI_residencyRoad
8 3000.00 SBI_ParlimentRoad
9 5000.00 SBI_residencyRoad
10 2000.00 SBI-Jantarmantar
Automatic context help is disabled. Use the toolbar to manually get help for the current caret position or to toggle automatic help.
Activate Windows
Go to Settings to activate Windows.


MySQL Workbench
(6, 4000, 'SBI_shivajiRoad'),
(7, 4000, 'SBI_residencyRoad'),
(8, 3000, 'SBI_ParlimentRoad'),
(9, 5000, 'SBI_residencyRoad'),
(10, 2000, 'SBI-Jantarmantar');
select * from bank_account;
insert into customers values
("Avinash","Bull_temple_road","Banglore"),
("Dinesh","Bannergatta_road","Banglore"),
("Mohan","NationalCollege_Road","Banglore"),
("Nikil","Akbar_Road","Delhi"),
("Ravi","Prithviraj","Delhi");
select * from customers;
customer_name customer_street customer_city
Avinash Bull_temple_road Banglore
Dinesh Bannergatta_road Banglore
Mohan NationalCollege_Road Banglore
Nikil Akbar_Road Delhi
Ravi Prithviraj Delhi
No object selected
Activate Windows


MySQL Workbench
("Dinesh",10),
("Nikil",7));
insert into loan Values
(1,1000,'SBI_Chamrajpet'),
(2,2000,'SBI_residencyRoad'),
(3,3000,'SBI_shivajiRoad'),
(4,4000,'SBI_ParlimentRoad'),
(5,5000,'SBI-Jantarmantar');
select branch_name, (total_assets / 100000.0) AS "assets in lakhs"
FROM
branch;
select * from loan order by amount desc;
loan_number amount branch_name
5 5000.00 SBI-Jantarmantar
4 4000.00 SBI_ParlimentRoad
3 3000.00 SBI_shivajiRoad
2 2000.00 SBI_residencyRoad
1 1000.00 SBI_Chamrajpet
No object selected
Activate Windows