FUNDAMENTAL OF DATA SCIENCE

EXP : 1a Analyze the trend of data science job over the last decade

DATE:

Aim:

Use web scraping (e.g., BeautifulSoup) or APIs (e.g., LinkedIn API) to gather

data on the number of data science job postings each year. Use pandas for data manipulation and matplotlib/seaborn for visualization.

Code:

```
import pandas as pd

import matplotlib.pyplot as plt

data = {'Year': list(range(2010, 2021)),

'Job Postings': [150, 300, 450, 600, 800, 1200, 1600, 2100, 2700, 3400, 4200]}


df = pd.DataFrame(data)

plt.plot(df['Year'], df['Job Postings'], marker='o')

plt.title('Trend of Data Science Job Postings')

plt.xlabel('Year')

plt.ylabel('Number ofJob Postings')


plt.show()
```

Year =2010, 2021

Job Postings=150, 300, 450, 600, 800, 1200, 1600, 2100, 2700, 3400, 4200

Output:

...

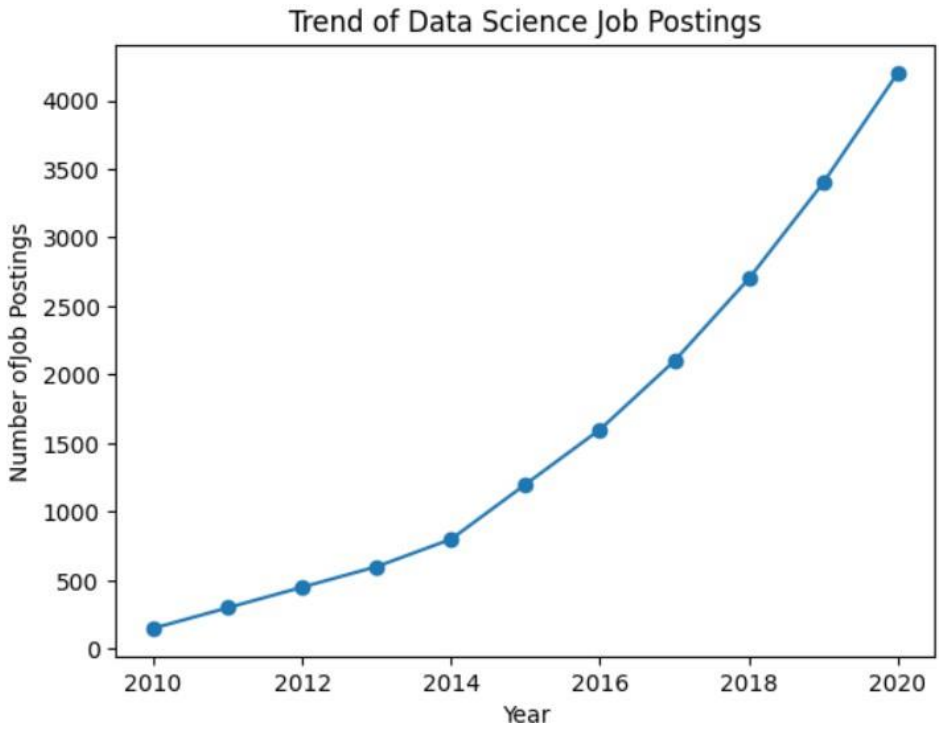

Result:

The above coding is executed successfully.

Exp No:1.b Analyze and visualize the distribution of various data science roles (DataAnalyst, Data Engineer, Data Scientist, etc.) from a dataset.

Aim:

Use a dataset of job postings and categorize them into different roles. Visualize the distribution using pie charts or bar plots.

Code:


```
roles = ['Data Analyst', 'Data Engineer', 'Data Scientist', 'ML Engineer',
'Business Analyst']
counts = [300, 500, 450, 200, 150]
plt.bar(roles, counts)
plt.title('Distribution of Data Science Roles')
plt.xlabel('Role')
plt.ylabel('Count')
plt.show()
```

Sample Input:

roles = Data Analyst, Data Engineer, Data Scientist, ML Engineer, Business Analyst.

counts = 300, 500, 450, 200, 150.

Output:

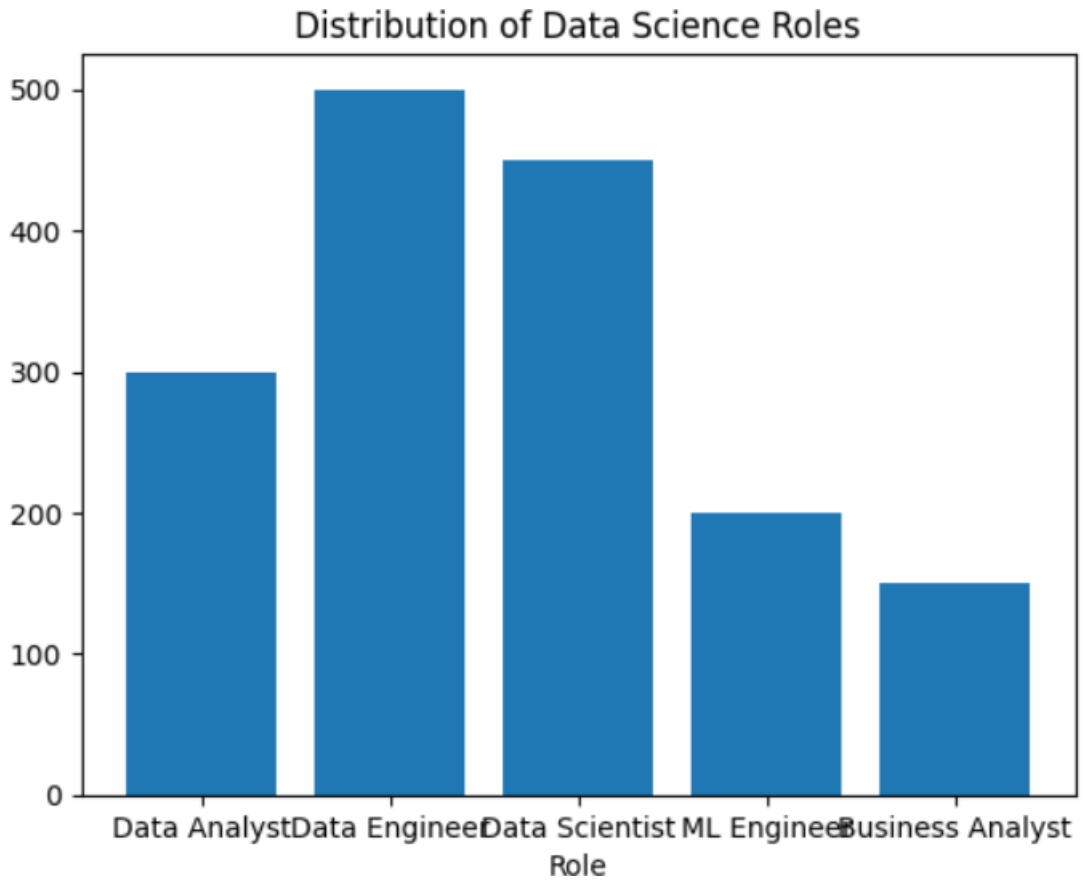

Result:

The above code is executed successfully.

Exp No:1.c Conduct an experiment to differentiate Structured , Un-structured and Semistructured data based on data sets given.

Aim:

Create small datasets for each type and explain their characteristics.

Code:

```
structured_data = pd.DataFrame({
'ID': [1, 2, 3],
'Name': ['Alice', 'Bob', 'Charlie'],
'Age': [25, 30, 35]
})
print("Structured Data:\n", structured_data)

unstructured_data = "This is an example of unstructured data. It can be a piece of text, an image,
or a video file."
print("\nUnstructured Data:\n", unstructured_data)

semi_structured_data = {'ID': 1, 'Name': 'Alice', 'Attributes': {'Height': 165, 'Weight': 68}}
print("\nSemi-structured Data:\n", semi_structured_data)
```

Output:

```
Structured Data:
    ID     Name  Age
0   1    Alice   25
1   2      Bob   30
2   3  Charlie   35

Unstructured Data:
 This is an example of unstructured data. It can be a piece of text, an image,
or a video file.

Semi-structured Data:
 {'ID': 1, 'Name': 'Alice', 'Attributes': {'Height': 165, 'Weight': 68}}
```

Result:

The above coding id executed successfully

Exp No:1.d Conduct an experiment to encrypt and decrypt given sensitive data.

Aim:

Use the cryptography library to encrypt and decrypt a piece of data.

Code:

```
from cryptography.fernet import Fernet
key = Fernet.generate_key()
f = Fernet(key)
token = f.encrypt(b"Rajalakshmi Engineering College")
token
b'...'
f.decrypt(token)
b'Rajalakshmi Engineering College'
key = Fernet.generate_key()
cipher_suite = Fernet(key)
plain_text = b"Rajalakshmi Engineering College."
cipher_text = cipher_suite.encrypt(plain_text)
# Decrypt data
decrypted_text = cipher_suite.decrypt(cipher_text)
print("Original Data:", plain_text)
print("Encrypted Data:", cipher_text)
print("Decrypted Data:", decrypted_text)
```

Output:

```
Original Data: b'Rajalakshmi Engineering College.'
Encrypted Data: b'gAAAAABqjSRART47_GuFe1RHqlP_gbztCRgcLfCv04Z8a4oHAoRi-UguNC8U5kusbS0h7GJ1eP45FOqTYX57eSjAGdrNOMOmJlm4d7hqFLA0_7ajEj81b3Wumcf0fe2MJWu50aI5cq6h'
Decrypted Data: b'Rajalakshmi Engineering College.'
```

Result:

The above coding is executed successfully

Exp No:2 Upload and Analyze the data set given in csv format and perform data preprocessing and visualization.

Aim:

Use sample data set sales-data.csv.

Code:


```
import pandas as pd
import numpy as np
import matplotlib.pyplot as plt
# Load the data into a pandas DataFrame
file_path='C:\sales_data.csv'
df = pd.read_csv(file_path)
# Display the first few rows of the DataFrame
print(df.head())
# Check for missing values
print(df.isnull().sum())
# Fill or drop missing values if necessary
df['Sales'].fillna(df['Sales'].mean(), inplace=True)
df.dropna(subset=['Product', 'Quantity', 'Region'], inplace=True)
# Summary statistics
print(df.describe())
# Group by product and calculate the total sales and quantity
product_summary = df.groupby('Product').agg({
'Sales': 'sum',
'Quantity': 'sum'
}).reset_index()
```


```
print(product_summary)
plt.figure(figsize=(10, 6))
plt.bar(product_summary['Product'], product_summary['Sales'])
plt.xlabel('Product')
plt.ylabel('Total Sales')
plt.title('Total Sales by Product')
plt.show()
# Line plot of sales over time
df['Date'] = pd.to_datetime(df['Date'])
sales_over_time = df.groupby('Date').agg({'Sales': 'sum'}).reset_index()
plt.figure(figsize=(10, 6))
plt.plot(sales_over_time['Date'],sales_over_time['Sales'])
plt.xlabel('Date')
plt.ylabel('Total Sales')
plt.title('SalesOver Time')
plt.show()
# Pivot table to analyze sales by region and product
pivot_table = df.pivot_table(values='Sales', index='Region', columns='Product',
aggfunc=np.sum, fill_value=0)
print(pivot_table)
# Correlation matrix
correlation_matrix = df.corr()
print(correlation_matrix)
# Heatmap of the correlation matrix
import seaborn as sns
plt.figure(figsize=(8, 6))
sns.heatmap(correlation_matrix, annot=True, cmap='coolwarm')
plt.title('Correlation Matrix')
```

plt.show()


Output:

```
Date     Product  Sales  Quantity Region
0  2023-01-01  Product A    200         4  North
1  2023-01-02  Product B    150         3  South
2  2023-01-03  Product A    220         5  North
3  2023-01-04  Product C    300         6   East
4  2023-01-05  Product B    180         4   West
Date        0
Product     0
Sales       0
Quantity    0
Region      0
dtype: int64
            Sales   Quantity
count   16.000000  16.000000
mean   237.500000   5.375000
std     64.031242   1.746425
min    150.000000   3.000000
25%    187.500000   4.000000
50%    225.000000   5.500000
75%    302.500000   7.000000
max    340.000000   8.000000
     Product  Sales  Quantity
0  Product A   1350        33
1  Product B    850        17
2  Product C   1600        36
```

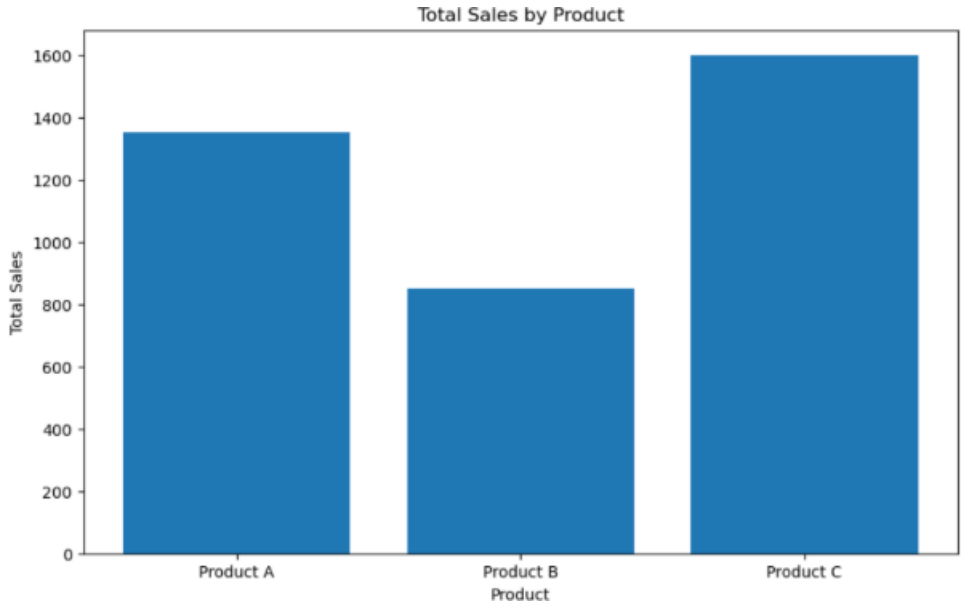

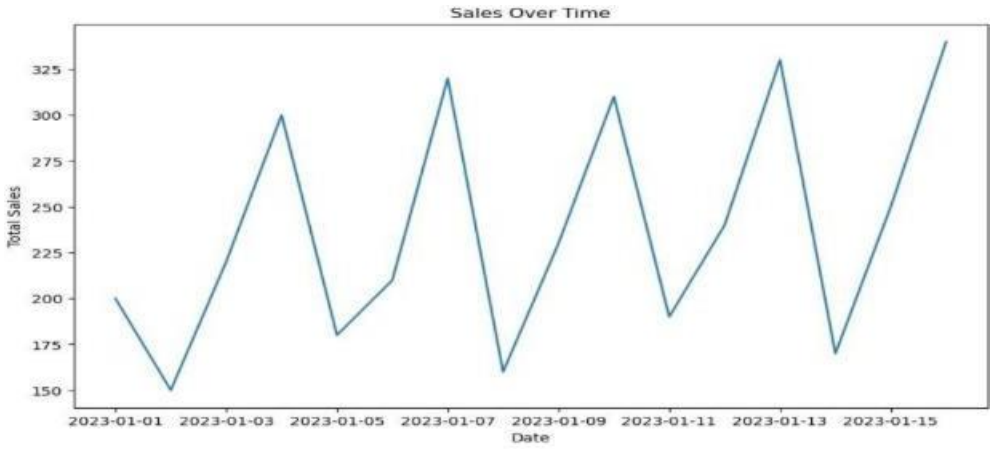


```
Product  Product A  Product B  Product C
Region
East             0          0       1600
North         1350          0          0
South            0        480          0
West             0        370          0
              Sales  Quantity
Sales      1.000000  0.944922
Quantity   0.944922  1.000000
C:\Users\Ayyadurai\AppData\Local\Temp\ipykernel_9648\511106317.py:49: Futur
eWarning: The default value of numeric_only in DataFrame.corr is deprecated
. In a future version, it will default to False. Select only valid columns
or specify the value of numeric_only to silence this warning.
  correlation_matrix = df.corr()
```

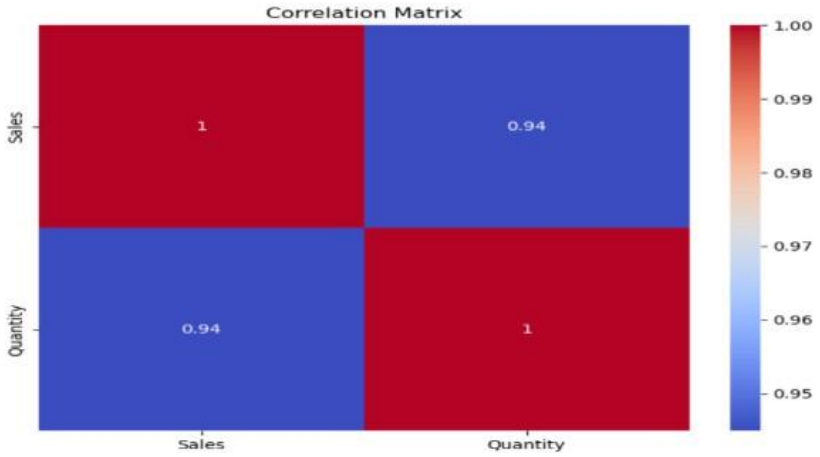

Result:

The above code is executed successfully

Exp No:3.a Conduct an experiment to show data visualization using line plot


Aim:

Take any sample data either through csv file or data fetched directly through code.

Code:

```
import matplotlib.pyplot as cricket
Overs=list(range(5,51,5))
Indian_Score=[30,55,90,129,165,200,239,270,310,350]
Srilankan_Score=[25,70,90,120,140,170,195,220,255,279]
cricket.plot(Overs,Indian_Score)
cricket.plot(Overs,Srilankan_Score)
cricket.show()
cricket.title("INDIA Vs SRILANKA")
cricket.xlabel("Overs")
cricket.ylabel("Score")
cricket.legend()
cricket.plot(Overs,Indian_Score,color="green",label="INDIA")
cricket.plot(Overs,Srilankan_Score,color="red",label="SRILANKA")
cricket.legend(loc="center right")
```

Output:

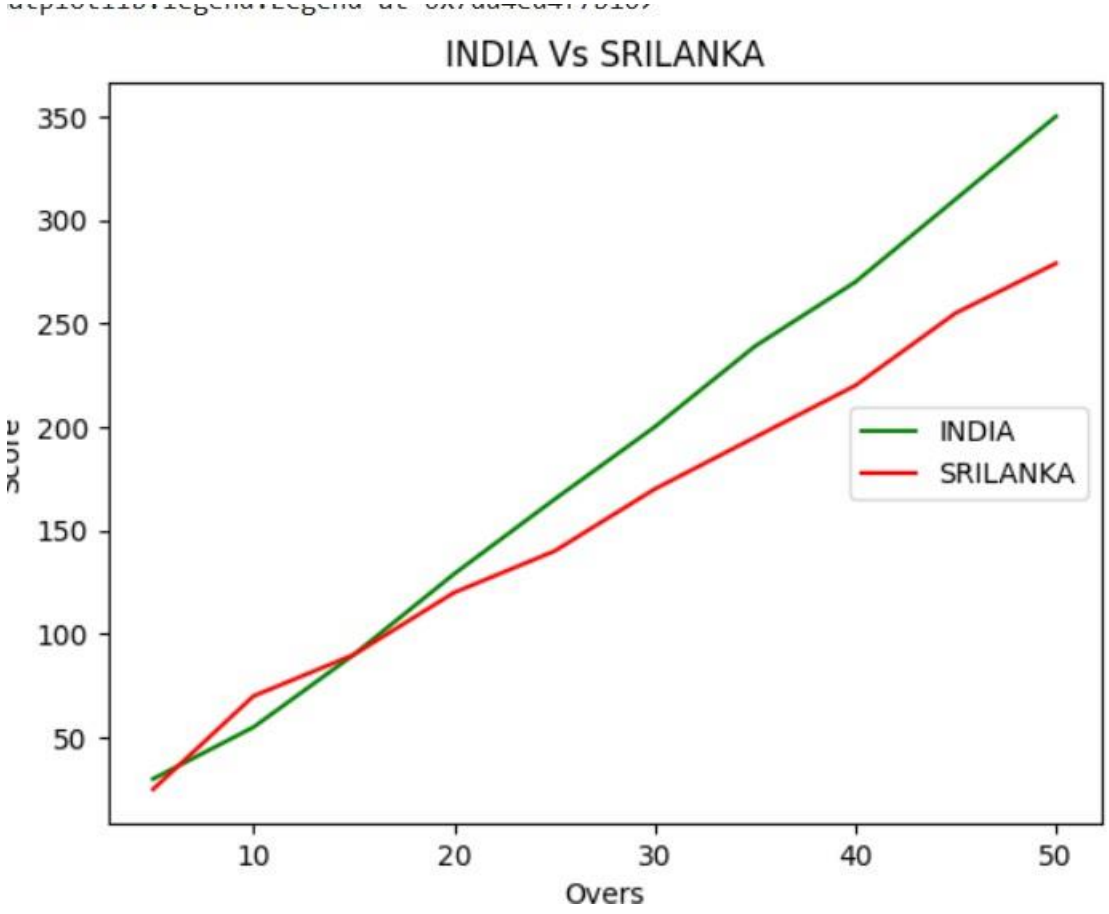

Result:

The above code is executed successfully.

Exp No:3.b Conduct an experiment to show data visualization using bar chart


Aim:

Take any sample data either through csv file or data fetched directly through code.

Code:

```
import matplotlib.pyplot as hscmark
import numpy as np
Names = ['SHREE', 'DEV', 'KEERTHI', 'PRIYA', 'SHAN', 'KUMARAN']
xaxis = np.arange(len(Names))
Percentage_hsc = [96, 91, 94, 75, 45, 81]
hscmark.bar(Names, Percentage_hsc)
hscmark.xticks(xaxis, Names, rotation=45)
hscmark.xlabel("Names of Pupil")
hscmark.ylabel("Percentage")
hscmark.title("Comparison of HSC Percentage", fontsize=20, color="green")
hscmark.show()
```

Sample output:

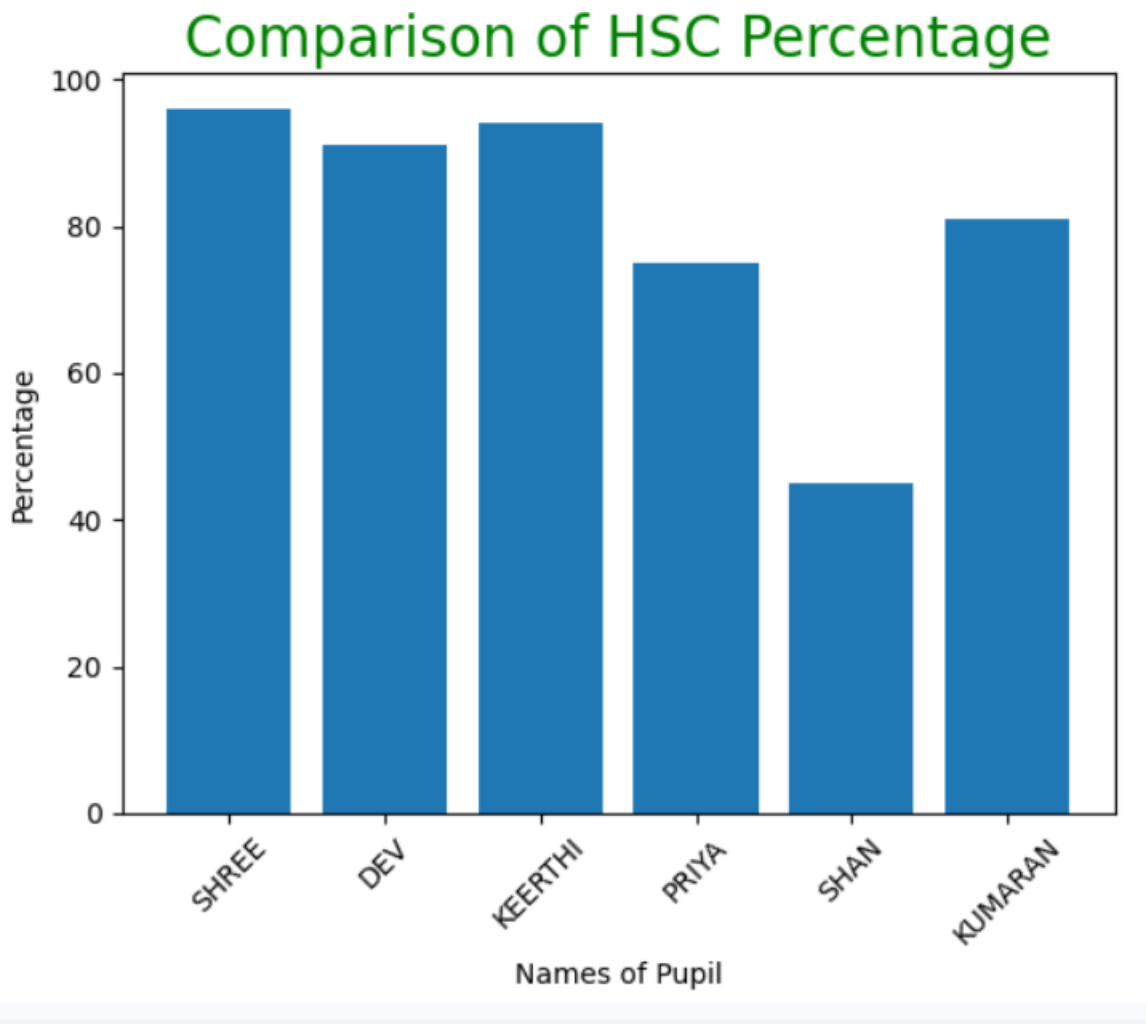

Result:

The above coding is executed successfully.

Exp No:3.c Conduct an experiment to show data visualization using pie chart

Aim:

Take any sample data either through csv file or data fetched directly through code.