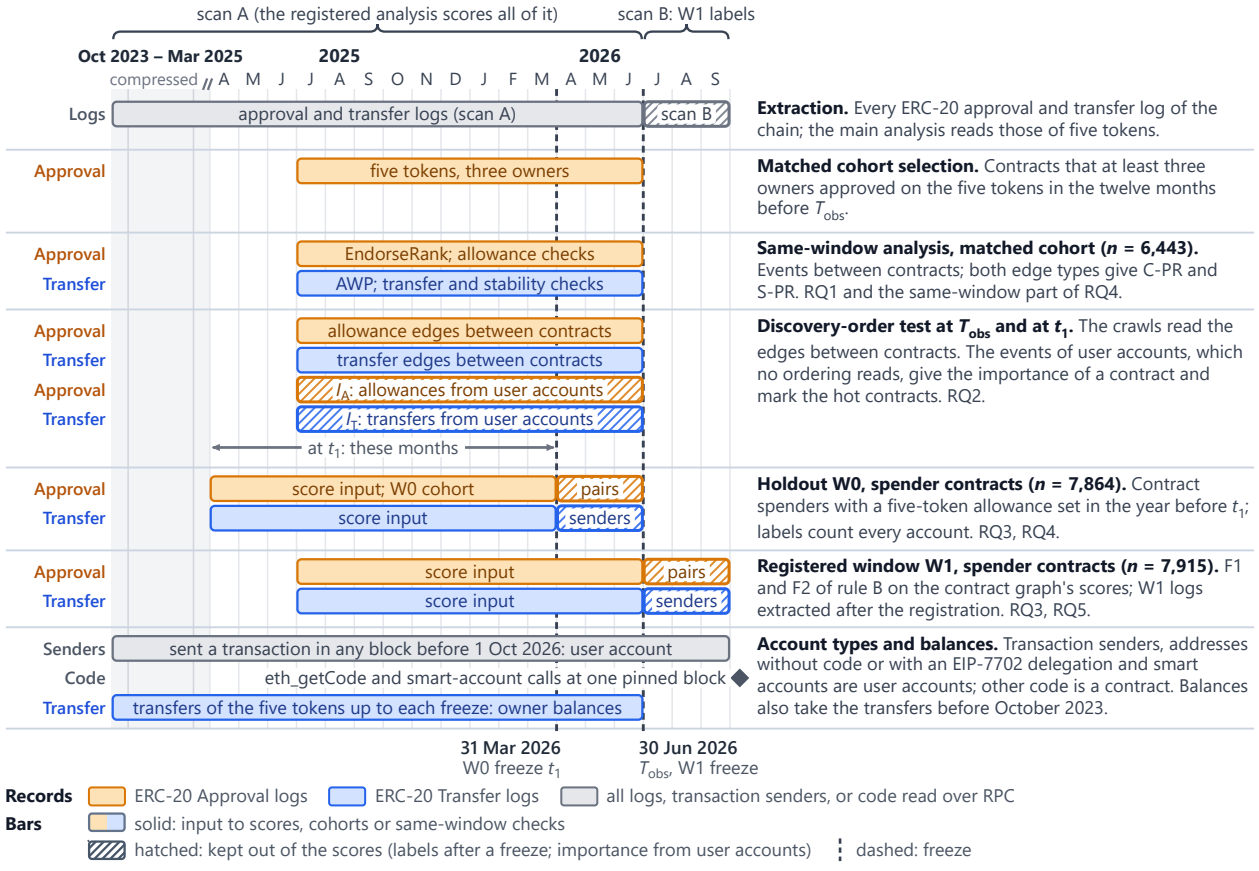


Extraction. Every ERC-20 approval and transfer log of the chain; the main analysis reads those of five tokens.

Matched cohort selection. Contracts that at least three owners approved on the five tokens in the twelve months before T_{obs}.

Same-window analysis, matched cohort (n = 6,443). Events between contracts; both edge types give C-PR and S-PR. RQ1 and the same-window part of RQ4.

Discovery-order test at T_{obs} and at t_1. The crawls read the edges between contracts. The events of user accounts, which no ordering reads, give the importance of a contract and mark the hot contracts. RQ2.

Holdout W0, spender contracts (n = 7,864). Contract spenders with a five-token allowance set in the year before t_1; labels count every account. RQ3, RQ4.

Registered window W1, spender contracts (n = 7,915). F1 and F2 of rule B on the contract graph's scores; W1 logs extracted after the registration. RQ3, RQ5.

Account types and balances. Transaction senders, addresses without code or with an EIP-7702 delegation and smart accounts are user accounts; other code is a contract. Balances also take the transfers before October 2023.