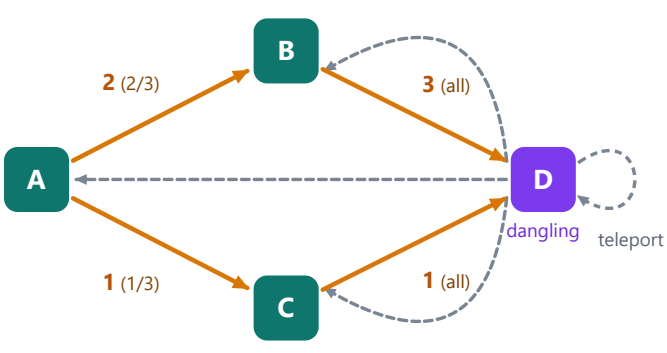


With probability d, follow an out-edge, chosen in proportion to its weight (the share in brackets).

With probability $1 - d$, teleport: every node gets $(1 - d)/|V|$. Drawn from **D** only.

D has no out-edge (dangling), so a surfer at **D** always jumps to a uniformly chosen node.

Long-run share of visits worked example, $d = 0.85$

D		0.4706
B		0.2154
C		0.1765
A		0.1375