

Snowside Whitepaper

version 0.2

Bitcoin security. Avalanche speed.

A dedicated Avalanche Layer-1 for the eCash hard-fork

July 2026

0xShomari

<https://snowside.network>

Table of Contents

1. TL;dr
2. Introduction
3. Architecture Overview
4. Blind Merged Mining
5. BTC as Native Gas
6. USDC Bridge via Interchain Messaging
7. NodΞRunr & Validator Management
8. Consensus & Security Model
9. Validator Economics
10. Comparison with Alternatives
11. Risks & Mitigations
12. Roadmap
13. Conclusion
14. References
15. Legal Disclaimer

■ 1. Tl;dr

Snowside is a dedicated Avalanche Layer-1 blockchain built to host Paul Sztorc's upcoming eCash hard-fork. It runs as a clean EVM sidechain where the native gas token is BTC itself — no new minted tokens, no pre-mine, just Bitcoin security via blind merged mining.

Key properties:

- Native BTC gas — transaction fees paid in BTC, no new token, no pre-mine
- Bitcoin security via Blind Merged Mining (BIP-301)
- Sub-second finality through Avalanche Snowball consensus
- Three-part fee model: Base Fees to miners, Priority Fees to validators, Contract Fees split between contract owners and validators
- USDC bridging from C-Chain via Avalanche Interchain Messaging (ICM)
- Full EVM compatibility — Remix, Hardhat, Foundry work out-of-the-box
- NodΞRunr automation eliminates the operational overhead that killed EthSide
- Sovereign validator set — dedicated throughput for eCash operations
- Permissionless validation roadmap — phased transition from permissioned launch to BTC-only bonding with AVAX phase-out
- No token. No ICO. No governance token. Infrastructure, not an investment vehicle.

■ 2. Introduction

Bitcoin's scripting system is intentionally limited. This constraint preserves security and predictability but prevents the deployment of complex smart contract logic directly on the Bitcoin network. Sidechains have long been proposed as the solution: independent chains that inherit Bitcoin's security while offering expanded functionality.

Paul Sztorc's Drivechain proposal (BIP-300/301) provides a concrete mechanism for Bitcoin-secured sidechains. Blind Merged Mining (BIP-301) allows Bitcoin miners to secure sidechains without running additional software or understanding their internals. The upcoming eCash hard-fork activates Drivechains on a Bitcoin fork, enabling purpose-built sidechains to launch with Bitcoin-class security from day one.

Paul's previous EVM sidechain, EthSide, was discontinued because standalone chain management was too time-consuming. The chain required constant manual intervention for updates, monitoring, and maintenance — work that was not sustainable for a single maintainer.

Snowside solves this problem. By building on Avalanche's Layer-1 infrastructure and leveraging NodΞRunr for automated node management, Snowside gives Paul and his community a chain that they can actually use — without babysitting. The combination of Bitcoin's economic security model, Avalanche's high-performance consensus, and NodΞRunr's operational automation creates a sidechain that is both secure and trivially operable.

■ 3. Architecture Overview

Snowside is an EVM-compatible Layer-1 blockchain running on Avalanche's consensus infrastructure. It combines three layers: an EVM execution environment, Avalanche's Snowball consensus protocol for fast finality, and Blind Merged Mining for Bitcoin-anchored settlement security.

3.1 EVM Execution Layer

Snowside runs a standard EVM execution environment. All existing Ethereum developer tools — Remix, Hardhat, Foundry, The Graph, viem, ethers.js — work without modification. Smart contracts written in Solidity or Vyper deploy identically to how they would on any other EVM chain.

The EVM is augmented with custom precompiles for eCash-specific logic, configurable via NodΞRunr's precompile concierge feature. This allows eCash protocol rules to be enforced at the consensus level rather than through external smart contracts.

3.2 Avalanche Consensus (Snowball)

Snowside validators use Avalanche's Snowball consensus — the linear-chain variant of the Avalanche Consensus Protocol. Snowball provides deterministic finality: once a block is accepted by the validator set, it is final and cannot be reverted. This eliminates the probabilistic finality problem of proof-of-work chains, where blocks can always be orphaned.

Key properties of Snowball consensus on Snowside:

- Sub-second finality — transactions confirm in approximately 1-3 seconds
- Sovereign validator set — independent of C-Chain or any other Avalanche subnet
- Phased permissionless participation — permissioned at launch, open with BTC bonding in Phase 2, BTC-only in Phase 3
- Custom throughput — Snowside sets its own block size and gas limits

3.3 Blind Merged Mining Settlement

While Avalanche consensus provides fast, deterministic finality, ultimate settlement security comes from Bitcoin via Blind Merged Mining (BIP-301). Snowside block producers submit compact header commitments to Bitcoin miners, who include them in coinbase transactions. This creates a cryptographic link between Bitcoin's proof-of-work and Snowside's activity.

This two-layer security model is described in detail in section 4 (Blind Merged Mining) and section 8 (Consensus & Security Model).



Figure: System architecture. Bitcoin miners secure Snowside via BMM commitments (left). Avalanche C-Chain provides USDC liquidity via ICM bridge (right). Snowside operates as a sovereign EVM L1 in the center.

■ 4. Blind Merged Mining

Blind Merged Mining (BMM) is the mechanism by which Bitcoin miners secure Snowside without running a full Snowside node. It is defined in BIP-301 and activates as part of the eCash Drivechain (BIP-300/301) hard-fork.

4.1 How BMM Works

Validators produce and finalize Snowside blocks. Settlement proposers then submit compact block header commitments for these finalized blocks to the Bitcoin mainchain. Bitcoin miners include these commitments in their coinbase transactions. The miner who includes a commitment earns a BTC fee from the settlement proposer who submitted it.

Crucially, Bitcoin miners do not need to:

- Run a Snowside full node
- Validate Snowside transactions
- Understand Snowside's consensus rules
- Hold any Snowside-specific tokens

They simply include a small data commitment in a transaction they are already making. This is the "blind" in Blind Merged Mining — miners are blind to the sidechain's internals.



Figure: Blind Merged Mining. Bitcoin miners include a compact header commitment (zero marginal cost) and earn BTC fees from settlement proposers. No additional hardware or software required.

4.2 Block Production vs Settlement

Snowside separates two architecturally distinct roles: validators who run consensus and produce blocks, and settlement proposers who anchor finalized blocks to eCash L1 via BMM commitments.

Validators:

- Run Snowball consensus and produce new Snowside blocks
- Require BTC bonding (Phase 2+) for sybil resistance
- Subject to slashing for misbehavior

- Earn Priority Fees and Contract Fees

- Permissioned in Phase 1, permissionless in Phase 2+

Settlement Proposers:

- Anyone who submits BMM commitments to anchor existing Snowside blocks to eCash L1
- No staking or bonding required — permissionless from day one
- Sybil resistance is economic: each BMM commitment costs real BTC (paid to miners)
- Reimbursed via Base Fees collected from users
- Competitive market keeps BMM fees efficient
- Cannot forge blocks — they only anchor existing finalized blocks

This separation means sybil concerns are specifically about the validator set, not the settlement layer. Settlement is open by design and naturally protected by BMM economics.

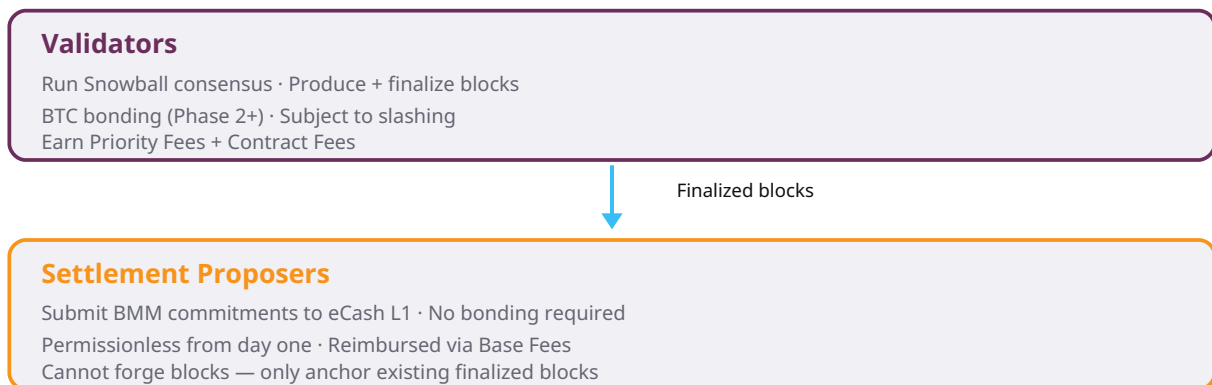


Figure: Role separation. Validators (top) run Snowball consensus and produce blocks with BTC bonding. Settlement Proposers (bottom) submit BMM commitments to eCash L1 — permissionless, no bonding required, reimbursed via Base Fees.

4.3 Economic Incentives

The economic model is simple and self-sustaining:

- Snowside users pay BTC for gas (Base Fees, Priority Fees, and Contract Fees)
- Validators collect Priority Fees and Contract Fees; settlement proposers collect Base Fees
- Settlement proposers pay a portion of Base Fees as BMM incentives to Bitcoin miners
- Miners include commitments because the marginal cost is zero and the fee is positive

Because the cost to miners is negligible — they are already producing blocks — rational miners will include Snowside commitments. This gives Snowside access to Bitcoin's full security budget.

4.4 Settlement Finality

BMM provides a third tier of confirmation: settlement. While Avalanche consensus confirms transactions in seconds, the BMM anchor to Bitcoin provides the ultimate security guarantee. Reverting Snowside's history requires attacking Bitcoin's hashrate — the most costly attack in all of cryptocurrency.

■ 5. BTC as Native Gas

All transaction fees on Snowside are paid in BTC. There is no alternative gas token, no new minted token, and no pre-mine. The only assets on Snowside are BTC (for gas) and USDC (bridged from C-Chain via ICM).

5.1 Why BTC Gas Matters

Using BTC as the native gas token preserves Bitcoin's economic model. Users are not forced to acquire a new, speculative token to interact with the chain. They use Bitcoin — the most recognized and liquid cryptocurrency — for all transactions.

This design choice has several implications:

- No token launch, ICO, or pre-mine — Snowside is infrastructure, not an investment vehicle
- No governance token — protocol parameters are set by validators and the community
- Bitcoin holders can use Snowside without exposure to new token risk
- The gas market is denominated in the world's most trusted digital asset

5.2 Acquiring BTC for Gas

Users acquire BTC for gas through two mechanisms:

- Blind Merged Mining: BTC flows between Bitcoin and Snowside via the BMM peg mechanism
- Bridges: Users can bridge value from other chains to obtain BTC on Snowside


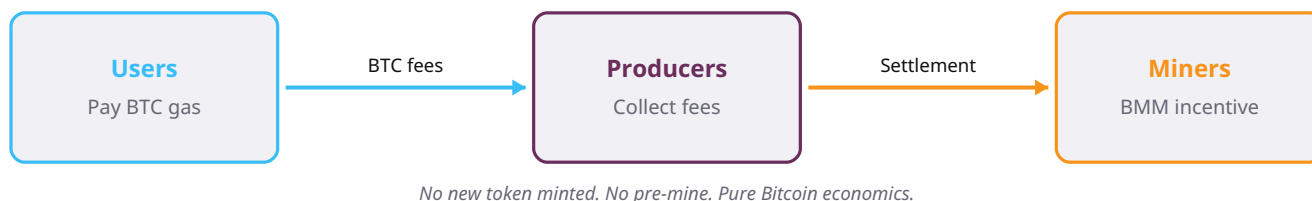


Figure: BTC gas flow. Users pay BTC for transaction fees. Block producers collect fees and distribute BMM settlement incentives to Bitcoin miners. No new token is minted — the Bitcoin economic model is preserved end-to-end.

5.3 Three-Part Fee Model

Snowside adopts a three-part fee structure, denominated in BTC, that separates settlement security costs from validator incentives and contract developer revenue.

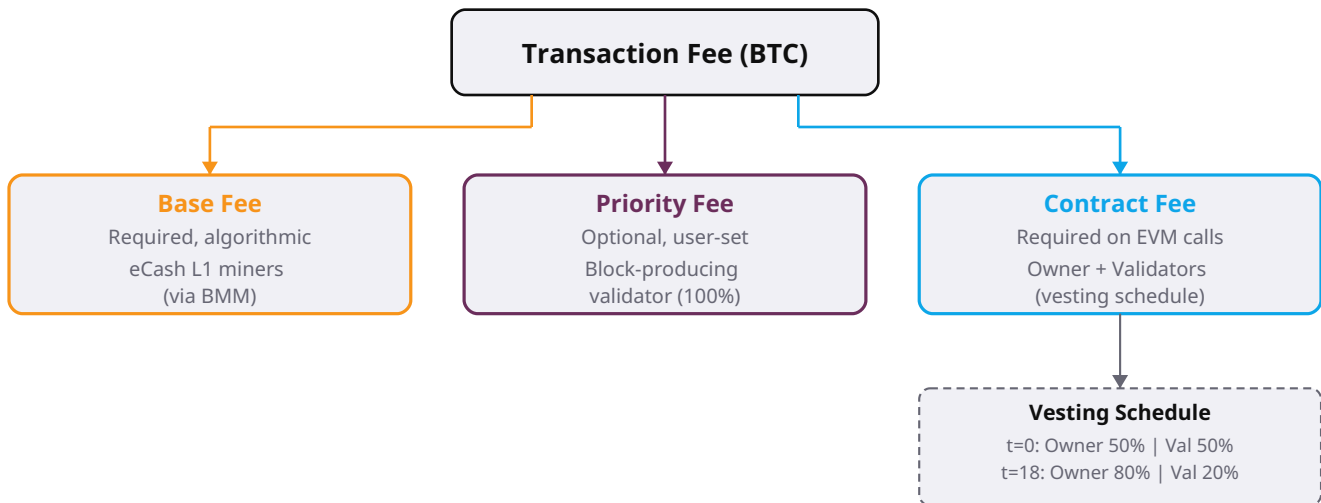

Validator portion: 50% equal distribution / 50% proportional to bonded BTC

Figure: Three-part fee model. Base Fees flow to eCash L1 miners via BMM commitments. Priority Fees go to the block-producing validator. Contract Fees split between the Contract Owner (50%80% vesting over 18 months) and the Validator Set (50%20%), with the validator portion further split 50% equal / 50% proportional to bonded BTC.

Base Fee (required, algorithmic):

- 100% directed to eCash L1 miners via BMM commitments
- Funds settlement security and anchoring
- Validators do NOT touch this stream

Priority Fee (optional, user-set):

- 100% to the block-producing validator
- Incentivizes transaction inclusion when blocks are full
- Analogous to Ethereum's EIP-1559 priority fee

Contract Fee (required on EVM contract calls):

- Split between Contract Owner and Validator Set
- Compensates validators for EVM computation
- Incentivizes contract developers with recurring revenue
- NOT sent to L1 miners

5.4 Contract Fee Vesting Schedule

The Contract Owner's share of Contract Fees vests linearly from 50% at contract registration to an 80% ceiling at 18 months, then remains flat:

$$r(t) = 50\% + (30\% / 18) * \min(t, 18)$$

Where t = months since contract registration and $r(t)$ = contract owner's share.

Timeline:

- Registration ($t=0$): Contract Owner 50% | Validators 50%
- 6 months ($t=6$): Contract Owner 60% | Validators 40%
- 12 months ($t=12$): Contract Owner 70% | Validators 30%
- 18 months ($t=18$): Contract Owner 80% | Validators 20% (ceiling)
- Beyond 18 months: Remains at 80/20 split

This vesting schedule rewards contracts that demonstrate sustained usage and reliability. Early on, validators receive a larger share (50%) to compensate for the higher risk of new, unproven contracts. As contracts mature and prove reliable, the contract owner's share increases to 80%, and validators settle to 20%.

5.5 Validator Portion Distribution

Of the validator's share of Contract Fees, distribution among active validators is split:

- 50% EQUAL DISTRIBUTION: Divided equally among all active validators regardless of bond size. Keeps small validators viable and encourages decentralization.
- 50% PROPORTIONAL TO BOND: Divided proportional to each validator's bonded BTC. Rewards larger stakeholders without monopolizing revenue.

Note: The 50% equal distribution component is acknowledged as potentially sybil-prone (operators could spin up multiple nodes to claim multiple equal shares). This is accepted as a trade-off for Phase 1-2 to prioritize accessibility and decentralization. The equal/proportional ratio may be adjusted via governance in future phases if sybil concerns materialize.

5.6 Preserving Bitcoin's Economic Model

Because BTC is the only gas token, Bitcoin's economic incentives flow directly into Snowside. Miners who secure Snowside via BMM are paid in BTC. Users who transact on Snowside pay in BTC. The economic loop is entirely Bitcoin-native — no competing incentive structures, no token dilution, no governance games.

■ 6. USDC Bridge via Interchain Messaging

A native, trust-minimized bridge connects Snowside to Avalanche's C-Chain via Interchain Messaging (ICM). This allows USDC holders on C-Chain to transfer their stablecoins directly to Snowside without relying on third-party custodians or wrapped token representations.

6.1 Native ICM Bridge

Avalanche's Interchain Messaging protocol enables communication between Avalanche subnets and the primary network. The ICM bridge provides:

- Trust-minimized: No third-party custodian holds the bridged assets
- Native: Built into the Avalanche protocol, not a bolt-on bridge
- Fast: Transfers confirm in Avalanche finality time (seconds)
- Bidirectional: USDC can flow in both directions

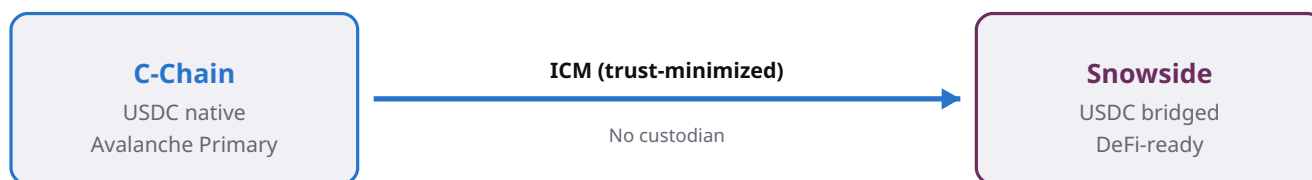


Figure: ICM USDC bridge. USDC moves trust-minimized from Avalanche C-Chain to Snowside via native Interchain Messaging — no third-party custodian, no wrapped tokens, available from mainnet launch.

6.2 DeFi-Ready from Day One

By bridging USDC from C-Chain at mainnet launch, Snowside provides immediate access to the world's most recognized stablecoin. This makes Snowside useful for DeFi applications from day one — lending, borrowing, trading, and payments can all use USDC without waiting for a separate bridge deployment or liquidity bootstrapping.

■ 7. NodΞRunr & Validator Management

NodΞRunr is the open-source node management daemon that makes Snowside operable without babysitting. It handles every aspect of validator lifecycle: deployment, monitoring, updates, and communication.

7.1 One-Click Deployment

Running a Snowside validator with NodΞRunr takes under a minute. The process requires:

- A server (VPS) with basic specifications
- AVAX for the Avalanche Primary Network stake
- The NodΞRunr Snowside template

NodΞRunr handles the rest: node installation, configuration, key generation, and network registration. No manual editing of config files, no hand-written genesis files, no SSH gymnastics.

7.2 24/7 Monitoring & Automatic Updates

NodΞRunr continuously monitors validator health — block production rate, peer connections, disk usage, memory, and CPU. When an update is available, NodΞRunr can apply it automatically with zero downtime. Alerts are sent via encrypted channels if intervention is required.

7.3 Custom Precompiles

NodΞRunr's precompiles concierge feature allows eCash-specific logic to be integrated directly into the L1 configuration. This is essential for enforcing protocol rules at the consensus level rather than through external smart contracts that could be bypassed or exploited.

7.4 Why EthSide Failed — and How NodΞRunr Fixes It

Paul Sztorc's previous EVM sidechain, EthSide, was discontinued because standalone chain management was too time-consuming. Every update required manual intervention. Every validator restart required SSH access. Every monitoring alert required human attention. For a single maintainer, this was unsustainable.

NodΞRunr solves every one of these problems:

- Deployment: one command instead of a multi-hour setup process
- Monitoring: automated health checks instead of manual log reading
- Updates: automatic, zero-downtime patches instead of manual restarts
- Communication: encrypted, structured alerts instead of ad-hoc notifications

The result is a chain that can stay alive without constant human intervention — the exact requirement Paul identified for a sustainable sidechain.

■ 8. Consensus & Security Model

Snowside's consensus and security model combines two layers: Avalanche's Snowball consensus for fast, deterministic finality, and Blind Merged Mining for Bitcoin-anchored settlement. Together, they provide a three-tier confirmation model that lets users choose the trust level appropriate to their use case.

8.1 Layer 1: Avalanche Snowball Consensus

Snowside validators run Avalanche's Snowball consensus protocol. Snowball is the linear-chain variant of the Avalanche Consensus Protocol, designed for blockchains that require a total ordering of transactions. Key properties:

- Deterministic finality: once a block is accepted, it is final — no probabilistic waiting
- Sub-second confirmation: transactions typically finalize in 1-3 seconds
- Validator-set sovereignty: Snowside validators are independent of C-Chain or any other subnet
- Phased permissionless participation: permissioned at launch, open with AVAX + BTC bonding in Phase 2, BTC-only in Phase 3

8.2 Layer 2: BMM Settlement to Bitcoin

While Snowball consensus provides fast finality among Snowside validators, BMM anchoring to Bitcoin provides the ultimate security guarantee. Every Snowside block (or batches of blocks) is anchored to Bitcoin via a BMM commitment. Reverting Snowside's settled history requires attacking Bitcoin's hashrate — economically irrational for any attacker.

8.3 Validators vs Settlement Proposers

Snowside distinguishes between validators (who run Snowball consensus and produce blocks) and settlement proposers (who submit BMM commitments to eCash L1). This separation is described in detail in section 4 (Block Production vs Settlement). Key point: sybil concerns apply to the validator set, not the settlement layer — settlement is permissionless and protected by BMM economics.

8.4 Validator Bonding and Sybil Resistance

In Phase 2 and beyond, validators bond BTC via the BMM peg mechanism for sybil resistance. The minimum bond is 0.3 BTC (approximately \$20,000), modeled after Avalanche's original 2,000 AVAX requirement. Bonded BTC is locked on eCash L1 through the peg-in process and tracked in Snowside L2 state — no wrapped tokens, no custodians. Misbehavior triggers slashing: bonded BTC is burned in L2 state, making it permanently unrecoverable. Detailed bonding requirements, slashing conditions, and performance standards are described in section 9 (Validator Economics).

8.5 Three-Tier Confirmation

Snowside provides three tiers of confirmation, each with a different trust/security tradeoff:



Figure: Three-tier confirmation model. Instant (Avalanche, ~1-3s), Confirmed (PoW block, ~2min), Settled (BMM anchor to Bitcoin, ~10-20min). Users choose the tier that matches their trust requirement.

Users and applications choose the tier that matches their requirements: payment applications can accept Instant confirmation, while high-value settlements may wait for Settled confirmation.

■ 9. Validator Economics

Running a Snowside validator is designed to be cheap, simple, and permissionless. The economic model ensures that community-run validation is genuinely feasible — not just in theory, but in practice.

9.1 Avalanche9000 Subscription Model

Snowside validators participate in Avalanche's Primary Network by staking AVAX. The Avalanche9000 upgrade introduced a subscription model that dramatically reduces the cost of running a subnet validator. Operational costs are approximately \$10-20 per month per validator — negligible compared to the revenue from BTC gas fees.

9.2 Revenue: Priority Fees and Contract Fees

Validators earn revenue from two of the three fee streams: Priority Fees (100% to the block-producing validator) and Contract Fees (split between contract owners and the validator set, with the validator portion further split 50% equal / 50% proportional to bonded BTC). The fee market is denominated in BTC, providing validators with Bitcoin-denominated income rather than a speculative new token. See section 5 for the full three-part fee model details.

9.3 Phased Permissionless Participation

Validator participation follows a three-phase roadmap (detailed in section 12):

- Phase 1 (Mainnet Launch): 3-5 seeded validators, AVAX staking required
- Phase 2 (Permissionless): Open registration with AVAX + 0.3 BTC bond via BMM peg, slashing active
- Phase 3 (Bitcoin-Native): BTC-only bonding, AVAX dependency eliminated

The requirements for Phase 2+ are:

- A server (VPS) with basic specifications
- AVAX for the Avalanche Primary Network stake (Phase 1-2)
- 0.3 BTC minimum bond via BMM peg (Phase 2+)
- The NodΞRunr Snowside template (free, open-source)

No special hardware, no complex setup, no approval process. NodΞRunr handles deployment, monitoring, and updates automatically.

Cost

Avalanche9000 subscription
~\$10-20 / month per validator
AVAX (Phase 1-2) + 0.3 BTC bond (Phase 2+)

Revenue

Priority Fees (BTC, 100% to producer)
Contract Fees (BTC, vesting split)
Permissionless — anyone can run

Figure: Validator economics. Operational cost is ~\$10-20/month via Avalanche9000 subscription plus BTC bond (0.3 BTC minimum, Phase 2+). Revenue comes from Priority Fees and Contract Fees (BTC). NodΞRunr eliminates manual maintenance, making community-run validation feasible.

9.4 BTC Bonding Requirements

Minimum bond: 0.3 BTC (approximately \$20,000 at current BTC prices).

Rationale: Avalanche's original validator requirement was 2,000 AVAX. At approximately \$10/AVAX, this equated to ~\$20,000 — a threshold that proved accessible enough to attract broad participation while remaining costly enough to deter casual sybils. Snowside adopts the same dollar-equivalent threshold in BTC terms.

Bond mechanism: BTC is bonded via the BMM peg (drivechain mechanism). Validators lock BTC on the eCash L1 through the peg-in process, and the bonded amount is tracked in Snowside L2 state. No wrapped tokens, no custodians — pure Bitcoin alignment.

Governance adjustment: The minimum bond is adjustable via validator governance. Parameters for adjustment:

- Total value secured on Snowside (higher TVS higher bond)
- Number of active validators (more validators can lower bond)
- BTC/USD exchange rate (significant price appreciation lower BTC amount to maintain dollar-equivalent threshold)

9.5 Slashing via BMM Peg

When Snowball consensus detects validator misbehavior, the bonded BTC is burned in L2 state. This prevents the validator from ever withdrawing that BTC back to eCash L1 via the peg-out mechanism.

Slashing conditions:

- Double-signing: Full bond slash (100% of bonded BTC)
- Invalid block proposal: Full bond slash
- Extended downtime (>10% of blocks missed over 30 days): Partial slash (25% of bonded BTC) + removal from active set
- Consensus participation below threshold: Partial slash + warning
- Oracle manipulation (if applicable): Full bond slash

Enforcement:

- Snowball consensus detects misbehavior
- Consensus emits slash signal
- Custom precompile processes slash signal
- Bonded BTC amount is burned in L2 state
- The actual BTC remains locked on eCash L1 but becomes permanently unrecoverable — the L2 will never generate a valid withdrawal transaction for the slashed amount

Economic outcome: The validator permanently loses access to their bonded BTC. The BTC is not destroyed on L1 (it remains locked in the peg script), but it is economically burned — no one can ever access it. This is real, enforceable slashing without requiring wrapped tokens or smart contract custody.

9.6 Validator Performance Requirements

To ensure network reliability and give prospective validators clear expectations before bonding BTC, Snowside establishes minimum performance standards. These are separate from slashing conditions — underperformance results in warnings and eventual removal, not bond confiscation.

Minimum performance standards:

- Uptime: Minimum 95% over rolling 30-day window (measured by block production and consensus participation)
- Block production latency: Block proposals must be submitted within 2 seconds of assigned slot
- Consensus participation: Must participate in at least 90% of Snowball consensus votes over rolling 7-day window
- Network connectivity: Must maintain connections to at least 5 peer nodes and respond to peer requests within 5 seconds
- Node synchronization: Must remain within 5 blocks of chain tip at all times

Violation thresholds:

- Below 90% uptime: formal warning
- Below 80% uptime for 7 consecutive days: automatic removal from active validator set (bond returned, no slash)
- Repeated latency violations (>5 per 100 blocks): warning
- Below 80% consensus participation: formal warning
- Below 70% consensus participation for 14 consecutive days: removal from active set
- Isolated validators (0 peers for >1 hour): automatic suspension
- Falling behind by >10 blocks: warning
- Falling behind by >50 blocks: automatic suspension until resynchronized

Penalty schedule (underperformance — NOT slashing):

- First warning: No penalty, 7-day cure period
- Second warning (within 30 days of first): Reduced Contract Fee share (50% reduction) for 7 days
- Third warning (within 30 days of second): Removal from active validator set for 30 days. Bond returned. May re-apply after suspension period.

Note: These penalties are for underperformance, NOT malicious behavior. Malicious behavior (double-signing, invalid blocks, oracle manipulation) triggers full slashing as described above.

NodΞRunr automatically tracks all performance metrics and provides real-time dashboards. Validators receive automated alerts before reaching warning thresholds. The monitoring system eliminates manual oversight and ensures consistent enforcement of performance standards.

■ 10. Comparison with Alternatives

Snowside is not the only way to build a Bitcoin sidechain. However, it is the only approach that combines Bitcoin economic security, Avalanche-grade performance, and automated operational management. Below is a comparison with the main alternatives.

10.1 vs Ethereum L2/Rollups

Ethereum L2s and rollups offer EVM compatibility but require wrapping BTC to use it as gas. They share a sequencer with other L2s, have multi-minute confirmation times, and offer no custom precompiles. Snowside provides native BTC gas, sovereign validators, sub-second finality, and custom precompiles.

10.2 vs Avalanche C-Chain

The C-Chain uses AVAX for gas and shares validators with all C-Chain users. Snowside has its own validator set, uses BTC for gas, and can implement custom precompiles for eCash-specific logic. This sovereignty is essential for a Bitcoin-aligned sidechain.

10.3 vs Standalone Chain

A standalone chain could theoretically implement BTC gas and custom precompiles, but it would lack Avalanche's ICM bridge for USDC, require expensive manual validator operations, and miss the operational automation provided by NodΞRunr. Snowside inherits all of Avalanche's infrastructure benefits while maintaining Bitcoin alignment.

■ 11. Risks & Mitigations

No project is without risk. We have identified the key risks and designed mitigations for each.

11.1 Paul Sztorc withdraws support or changes the eCash spec

Mitigation: Snowside is EVM-compatible and can host other Bitcoin sidechain experiments. The NodERunr template is modular and open-source. We are coordinating directly with Paul to ensure alignment, but the infrastructure remains valuable regardless of eCash's specific direction.

11.2 Low validator adoption

Mitigation: NodERunr's one-click setup removes the main barrier. We seed 3-5 initial validators ourselves. Documentation and community outreach (AMAs, tutorials) drive adoption. Target: 5+ independent validators within 60 days.

11.3 Security vulnerabilities in eCash contracts

Mitigation: Limited-scope audit prior to mainnet launch. Post-launch bug bounty program. All contracts use established, audited EVM patterns where possible.

11.4 BTC bridge or custody risk

Mitigation: Use established, audited bridge infrastructure. Avalanche ICM for USDC is trust-minimized with no third-party custodian. BMM design for BTC avoids centralized custody entirely.

11.5 Grant funding insufficient for full scope

Mitigation: Project is modular — testnet launch and documentation can proceed with \$10k. Mainnet launch and community programs can be phased. We may apply for the Team1 Accelerator Grant (\$30k) for expanded scope.

11.6 Avalanche protocol changes

Mitigation: NodERunr is maintained actively and tracks Avalanche upgrades. Snowside benefits from all Avalanche9000 improvements automatically.

■ 12. Roadmap

Month 1 — Fuji Testnet Launch:

- Finalize eCash L1 specification (VM, gas token, precompiles)
- Develop and test NodΞRunr Snowside template
- Deploy to Fuji testnet
- Public testnet RPC endpoint available

Month 2 — Security & Integration:

- Limited-scope security audit of eCash smart contracts
- Integrate C-Chain USDC bridge via ICM
- Onboard first 3-5 community validators on testnet
- Begin documentation: "How to Run a Snowside Validator"

Month 3 — Mainnet Launch:

- Mainnet launch with at least 3 independent validators
- Public RPC endpoint and block explorer live
- NodΞRunr Snowside template publicly available
- Bridge USDC from C-Chain to Snowside mainnet

Month 4 — Community Onboarding:

- Host AMA with Paul Sztorc
- Release tutorial video: "Launch a Bitcoin Sidechain with NodΞRunr"
- Distribute small testnet bounties to early users
- Target: 500+ unique addresses interacting with Snowside

Ongoing — Growth & Sustainability:

- Validator growth (target: 10+ validators)
- Protocol maintenance via NodΞRunr automation
- Explore additional Bitcoin sidechain templates
- Open-source all Snowside configuration files

12.1 Future: Permissionless Validation

Snowside's path to permissionless validation follows a three-phase roadmap that transitions from a permissioned launch to fully Bitcoin-native sybil resistance with AVAX dependency eliminated.



Figure: Three-phase permissionless validation roadmap. Phase 1: permissioned launch with seeded validators. Phase 2: open registration with AVAX + BTC bonding and slashing. Phase 3: Bitcoin-native sybil resistance with AVAX dependency eliminated — BTC-only bonding via BMM peg.

Phase 1 — Mainnet Launch (Permissioned):

- 3-5 seeded validators
- AVAX staking for Avalanche Primary Network participation
- Three-part fee model active from day one (Base + Priority + Contract)
- Settlement (BMM commitments) is permissionless — anyone can anchor blocks to eCash L1
- Focus on stability, architecture validation, and community onboarding

Phase 2 — Permissionless with AVAX + BTC Bonding:

- Open validator registration to anyone meeting requirements
- Requirements: AVAX stake for Primary Network + BTC bond via BMM peg (minimum 0.3 BTC, approximately \$20,000)
- Slashing active for misbehavior
- Contract Fee distribution: 50% equal / 50% proportional to bonded BTC
- Bond amount is governance-adjustable based on total value secured, number of active validators, and BTC/USD exchange rate
- Target: 10+ independent validators

Phase 3 — Bitcoin-Native Sybil Resistance (AVAX Phase-Out):

- Reduce and eventually eliminate AVAX staking dependency
- Transition to BTC-only bonding via BMM peg (no wrapped tokens, no AVAX, pure Bitcoin alignment)
- Custom precompile for bond management, slashing signals, and validator registry
- Dynamic bond requirements based on network usage and total value secured

- *Explore alternative Primary Network participation mechanisms or fully sovereign validation independent of AVAX*

- This phase is the long-term goal: Snowside validation should be accessible to anyone who holds BTC, with no secondary token requirements
- Target: fully Bitcoin-aligned permissionless validation

The Phase 3 AVAX phase-out is a critical long-term objective. While AVAX staking is a pragmatic requirement for Avalanche Primary Network participation in Phases 1-2, it creates a dependency on a secondary token that conflicts with Snowside's Bitcoin-native philosophy. The Phase 3 transition is a core roadmap commitment, not merely an exploration.

■ 13. Conclusion

Snowside represents a new approach to Bitcoin sidechains: Bitcoin's economic security via Blind Merged Mining, Avalanche's sub-second finality, and NodΞRunr's automated operational management — all in a single EVM-compatible chain.

By using BTC as the native gas token, Snowside preserves Bitcoin's economic model without introducing a competing token. By leveraging Avalanche's Interchain Messaging, it provides immediate access to USDC liquidity from the C-Chain. And by automating every aspect of validator management through NodΞRunr, it eliminates the operational burden that killed Paul Sztorc's previous EVM sidechain.

The result is a chain that is secure enough for Bitcoin purists, fast enough for real applications, and operable enough to stay alive without constant human intervention. That is what a sustainable Bitcoin sidechain looks like — and that is what Snowside delivers.

The Fuji testnet launches in Month 1. Mainnet follows in Month 3. Builders, validators, and Bitcoin enthusiasts are invited to participate from day one.

■ 14. References

- [1] BIP-300: Hashrate Escrows — <https://github.com/bitcoin/bips/blob/master/bip-0300.mediawiki>
- [2] BIP-301: Blind Merged Mining — <https://github.com/bitcoin/bips/blob/master/bip-0301.mediawiki>
- [3] Drivechains: Sidechains for Bitcoin — <https://drivechain.info/>
- [4] Avalanche Consensus Protocol — <https://arxiv.org/abs/1906.08936>
- [5] Team Rocket — "Scalable and Probabilistically Consensus based on Majority Votes" — May 2018 (Slush Snowflake Snowball Avalanche protocol family)
- [6] Avalanche Interchain Messaging (ICM) — <https://docs.avax.network/>
- [7] Avalanche9000 Documentation — <https://docs.avax.network/>
- [8] NodΞRunr — <https://layer1.run>
- [9] NodΞRunr Documentation — <https://docs.layer1.run>
- [10] Ethereum Virtual Machine Specification — <https://ethereum.org/en/developers/docs/evm/>
- [11] USDC by Circle — <https://www.circle.com/en/usdc>
- [12] RISCy Network — "RISCy Whitepaper: Native Unit and Fee Model" — Section 10

■ 15. Legal Disclaimer

This whitepaper is for informational purposes only and does not constitute financial, investment, legal, tax, or any other form of professional advice. It is not an offer to sell, a solicitation of an offer to buy, or a recommendation to purchase any security, token, or digital asset.

Forward-looking statements contained in this document — including but not limited to statements regarding the Snowside network, roadmap milestones, validator adoption targets, and the eCash hard-fork — involve significant risks, uncertainties, and assumptions. Actual results may differ materially.

The Snowside software and related tooling are provided "as is" without warranty of any kind. Participation in the Snowside network carries technical, economic, and regulatory risks, including but not limited to: smart-contract bugs, consensus failures, chain reorganizations, mining attacks, key loss, regulatory action, and total loss of funds.

No regulatory authority has reviewed, approved, or endorsed this whitepaper. References to third-party protocols (Bitcoin, Avalanche, eCash) or individuals (Paul Sztorc) do not imply endorsement.

There is no Snowside token. Snowside is infrastructure, not an investment vehicle. No token launch or ICO is planned, now or in the future.