

CSE 5231 Computer Networks

Class Project Report, Fall 2013

Andreas Bjoru & Srini Venkatesh
Florida Institute of Technology

November 26, 2013

Contents

1. Summary	2
2. Architecture	2
2.1. Network hosts	2
2.2. Network routers	3
2.3. Topology	3
3. Data flow	4
4. Execution	4
4.1. Windows Environment:	4
4.2. Unix Environment:	4
5. Output	5
5.1. 1 KB File transfer from Node-A to Node-B (B.txt)	5
5.2. 1 KB File transfer from Node-B to Node-C (c.txt)	5
5.3. 121 KB File transfer from Node-A to Node-C (C.jpg)	6
5.4. 276 KB File transfer from Node-B to Node-A (A.gif)	8
5.5. 4 KB File transfer from Node-C to Node-B (B.xls)	10
5.6. 13 KB File transfer from Node-C to Node-A (A.pdf)	12
A. Assignment Topology	15
B. Topology Definition JSON	16

1. Summary

The objective of this project is to demonstrate the functionality of some of the OSI layers in the communication stack. In particular, key functions performed by layers 2 (Data Link), 3 (Network) and 4 (Transport) is to be emulated for the purpose of transferring a file from one network node to another [1].

2. Architecture

The architecture of the network simulator is fairly simple. The main application class, **Simulator**, is responsible for reading the topology and creating each network node. A network node, *host or router*, are represented as system threads. Each of these network nodes share a common super-class **AbstractNetworkNode** that defines common functionality and basic implementation for the OSI layer methods. The OSI layer methods shares the same pattern in which they handle both incoming and outgoing data. This is achieved through the **Transmit** enum type that is a required argument along with the data payload.

The **physicalLayer(byte[], Transmit, Address)** method will send a given packet to every node attached to the same network, thereby simulating the task of writing a packet on the 'wire'. This is achieved by collecting every node attached to the sender's network address through the use of utility methods on the **Topology** class. When the physical layer method receives a packet, it will just hand it off to the layer above it.

The **linkLayer(byte[], Transmit, Address)** method will packet a given payload in an **EthernetFrame** along with the source and destination MAC addresses from the **Address** argument. The frame will then be handed down to the physical layer method to complete the sending responsibilities of the layer. When the link layer receives a packet it will first verify the cyclic redundancy check (CRC) sum of the packet. If this check fails, the packet will be dropped. The next check performed is the destination MAC address check which determines if the packet is actually for this node. If the destination MAC address matches the network node, then the payload of the packet is handed off to the layer above it. Otherwise, the packet is simply dropped since it is not addressed for this node.

2.1. Network hosts

The **transport(payload, transmit, addr)** method slices payload into segments while sending and assembles the segments when it receive the payload. When sending a given payload, it slices the payload into many segments based on the payload size. First it will check the length of the payload to make sure it needs to be sliced to MTU's size or not. If the payload size is more than the MTU's size then it will slice the segments considering the header length. These segments has TCP header along with data. Source and destination ports are included in the header. SYN and FIN flags are used to identify segments starting and ending point. This payload will be sent to network layer for adding IP header and route this segment to right node. Sending parameters would be **networkLayer(byte[], Transmit, Address)** method.

When receiving a payload, this method will convert the payload into segments. It will then extract the checksum to make sure segment is valid, if it's not valid it drops. If not,

it keeps accumulating the segments into a buffer. along with sequence number. Then it will check for the FIN flag in the header to confirm that that's the last segment. If it's not FIN (it must be SYN), then it keeps assembling the segments to build a complete payload. Once the payload is built, it will be sent to application layer for creating a file in destination node.

2.2. Network routers

The functionality of the network layer is overridden for routers since they will just route packages to the next network or host. Similar to the inherited version of this method, it will start by verifying the IP header checksum. If the verification fails, the package is dropped. Otherwise, the correct network interface is found and the MAC address of that interface is used as the new source MAC address. The destination MAC address is then resolved through `Topology arpResolve(IP)`, and the payload is sent to the `linkLayer(byte[], edu.fit.cs.computernetworks.AbstractNetworkNode.Transmit, Address)` method if the router.

2.3. Topology

The topology for the network described by the assignment was fixed (see figure 1). In order to avoid having to hard-code information extracted from this topology (routing tables, MAC tables, etc), we decided to represent the topology in an external format as seen in appendix B. This will also allow us to change the topology of the network without having to change the implementation. Each node in the topology is represented by a corresponding node in the *JSON* file including relevant information (see table below). Furthermore, the topology representation also contains the hardware address lookup table for the network.

Element	Type	Description
id	Host, Router	Hostname for the network node
ip	Host	IP address for a <i>host</i>
mask	Host	Network mask for a <i>host</i>
mac	Host	Hardware address for a <i>host</i>
mtu	Host	Maximum transmit unit for a <i>host</i>
gateway	Host	Default gateway for a <i>host</i>
routing	Host, Router	Routing table for the network node
ports	Router	Array of network interfaces for a <i>router</i>
port → ip	Router	IP address for a given port on a <i>router</i>
port → mask	Router	Network mask for a given port on a <i>router</i>
port → mac	Router	Hardware address for a given port on a <i>router</i>
port → mtu	Router	Maximum transmit unit for a given port on a <i>router</i>

The topology representation is mapped to corresponding Java classes using a 3rd-party library called **Jackson**, which sole purpose is to process the JSON data format. The Java package `edu.fit.cs.computernetworks.topology` contains the mapped types which is briefly explained below.

Topology is the root class of the topology model.

Node defines an abstract superclass for both Host and Router.

Host describes a network host.

Router describes a network router.

Port describes a network interface on a Router.

RoutingEntry describes an entry in a node's routing table.

MACTableEntry describes an entry in the global ARP table.

3. Data flow

Basically how data flows between network nodes. Explain how the layer methods work..

4. Execution

This project is built on eclipse environment with some additional packages. So first we need to download and install these packages by following the given steps.

4.1. Windows Environment:

1. Go to command prompt and navigate to the project's root location
2. Execute this command: `gradlew.bat eclipse`
3. The gradlew command is a wrapper around the gradle build tool and will download the binaries for the build tool before executing the task.
4. When gradle finishes (i.e. eclipse project files have been generated), you can import the project in eclipse by selecting import then existing project from the eclipse menus.
5. Create sample folder to place the file to transfer to different nodes.
For Example: Like, `C:\tmp\A`, `C:\tmp\B`, `C:\tmp\C`
6. Execute the following command:
`gradlew.bat run -ProotPath=C:\tmp`

4.2. Unix Environment:

1. Go to command prompt and navigate to the project's root location
2. Execute this command: `gradlew eclipse`
3. The gradlew command is a wrapper around the gradle build tool and will download the binaries for the build tool before executing the task.
4. When gradle finishes (i.e. eclipse project files have been generated), you can import the project in eclipse by selecting import -> existing project from the eclipse menus.
5. Create sample folder to place the file to transfer to different nodes.
For Example: Like, `/tmp/A`, `/tmp/B`, `/tmp/C`
6. Execute the following command:
`gradlew run -ProotPath=/tmp`

Notice the property `rootPath` that specifies the root path from where the threads will listen for files. The default path is still `/tmp/id` where `id` is the name of the host node

5. Output

This section contains the output of the application for different scenarios.

5.1. 1 KB File transfer from Node-A to Node-B (B.txt)

```
1 [A] NetworkHost run: Starting with observable directory: 'C:\tmp\A'
2 [B] NetworkHost run: Starting with observable directory: 'C:\tmp\B'
3 [C] NetworkHost run: Starting with observable directory: 'C:\tmp\C'
4 [A] NetworkHost run: New files discovered
5 [A] NetworkHost run: B.txt read, sending to transport layer...
6 [A] NetworkHost transport: Sending
7 [A] AbstractNetworkNode networkLayer: Send (IP header=[69, 0, 0, 20,
    0, 0, 0, 0, 0, 6, -61, 29, 10, 10, 20, 1, -64, -88, 25, 20])
8 [A] AbstractNetworkNode linkLayer: Send (Ethernet header=[-86, -86,
    -86, -86, -86, -86, -86, -85, -48, -80, 0, -122, -69, -9, 0, -80,
    -48, -122, -69, -9, 0, 0, 0, 0, 0, 0, 95, 15, -87, -70])
9 [A] AbstractNetworkNode physicalLayer: Send to network '10.10.20.0'
10 [R] AbstractNetworkNode physicalLayer: Received packet
11 [R] AbstractNetworkNode linkLayer: Received (Ethernet header=[-86, -
    86, -86, -86, -86, -86, -86, -85, -48, -80, 0, -122, -69, -9, 0,
    -80, -48, -122, -69, -9, 0, 0, 0, 0, 0, 0, 95, 15, -87, -70])
12 [R] NetworkRouter networkLayer: Send (IP header=[69, 0, 0, 20, 0, 0,
    0, 0, 0, 6, -61, 29, 10, 10, 20, 1, -64, -88, 25, 20])
13 [R] AbstractNetworkNode linkLayer: Send (Ethernet header=[-86, -86,
    -86, -86, -86, -86, -86, -85, 0, -80, -48, -122, -9, -69, -80, 0,
    -48, -122, -69, -9, 0, 0, 0, 0, 0, 0, -26, 93, 73, -31])
14 [R] AbstractNetworkNode physicalLayer: Send to network '192.168.25.0'
15 [C] AbstractNetworkNode physicalLayer: Received packet
16 [C] AbstractNetworkNode linkLayer: Received (Ethernet header=[-86, -
    86, -86, -86, -86, -86, -86, -85, 0, -80, -48, -122, -9, -69, -80
    , 0, -48, -122, -69, -9, 0, 0, 0, 0, 0, 0, -26, 93, 73, -31])
17 [C] AbstractNetworkNode linkLayer: Payload with destination MAC '00:
    b0:d0:86:f7:bb' does not belong to me!
18 [B] AbstractNetworkNode physicalLayer: Received packet
19 [B] AbstractNetworkNode linkLayer: Received (Ethernet header=[-86, -
    86, -86, -86, -86, -86, -86, -85, 0, -80, -48, -122, -9, -69, -80
    , 0, -48, -122, -69, -9, 0, 0, 0, 0, 0, 0, -26, 93, 73, -31])
20 [B] AbstractNetworkNode networkLayer: Received (IP header=[69, 0, 0,
    20, 0, 0, 0, 0, 0, 6, -61, 29, 10, 10, 20, 1, -64, -88, 25, 20])
21 [B] NetworkHost transport: Received
22 [B] NetworkHost transport: Adding Segment to buffer
23 [B] NetworkHost transport: Received last segment
24 [B] NetworkHost transport: Assembling 1 segments
25 [B] NetworkHost application: Wrote file 'file-0.bin'
```

5.2. 1 KB File transfer from Node-B to Node-C (c.txt)

```
1 [B] NetworkHost run: Starting with observable directory: 'C:\tmp\B'
2 [C] NetworkHost run: Starting with observable directory: 'C:\tmp\C'
```

```

3 [A] NetworkHost run: Starting with observable directory: 'C:\tmp\A'
4 [B] NetworkHost run: New files discovered
5 [B] NetworkHost run: C.txt read, sending to transport layer...
6 [B] NetworkHost transport: Sending
7 [B] AbstractNetworkNode networkLayer: Send (IP header=[69, 0, 0, 20,
    0, 0, 0, 0, 0, 6, 7, 113, -64, -88, 25, 20, -64, -88, 25, 15])
8 [B] AbstractNetworkNode linkLayer: Send (Ethernet header=[-86, -86,
    -86, -86, -86, -86, -86, -85, 0, -80, -48, -9, -122, -69, 0, -80,
    -48, -122, -9, -69, 0, 0, 0, 0, 0, 0, 0, -28, 76, -116, 56])
9 [B] AbstractNetworkNode physicalLayer: Send to network '192.168.25.0
    ,
10 [C] AbstractNetworkNode physicalLayer: Received packet
11 [C] AbstractNetworkNode linkLayer: Received (Ethernet header=[-86, -
    86, -86, -86, -86, -86, -86, -85, 0, -80, -48, -9, -122, -69, 0,
    -80, -48, -122, -9, -69, 0, 0, 0, 0, 0, 0, 0, -28, 76, -116, 56])
12 [C] AbstractNetworkNode networkLayer: Received (IP header=[69, 0, 0,
    20, 0, 0, 0, 0, 0, 6, 7, 113, -64, -88, 25, 20, -64, -88, 25, 15
    ])
13 [C] NetworkHost transport: Received
14 [C] NetworkHost transport: Adding Segment to buffer
15 [C] NetworkHost transport: Received last segment
16 [C] NetworkHost transport: Assembling 1 segments
17 [C] NetworkHost application: Wrote file 'file-0.bin'
18 [R] AbstractNetworkNode physicalLayer: Received packet
19 [R] AbstractNetworkNode linkLayer: Received (Ethernet header=[-86, -
    86, -86, -86, -86, -86, -86, -85, 0, -80, -48, -9, -122, -69, 0,
    -80, -48, -122, -9, -69, 0, 0, 0, 0, 0, 0, 0, -28, 76, -116, 56])
20 [R] AbstractNetworkNode linkLayer: Payload with destination MAC '00:
    b0:d0:f7:86:bb' does not belong to me!

```

5.3. 121 KB File transfer from Node-A to Node-C (C.jpg)

```

1 [C] NetworkHost run: Starting with observable directory: 'C:\tmp\C'
2 [A] NetworkHost run: Starting with observable directory: 'C:\tmp\A'
3 [B] NetworkHost run: Starting with observable directory: 'C:\tmp\B'
4 [A] NetworkHost run: New files discovered
5 [A] NetworkHost run: C.JPG read, sending to transport layer...
6 [A] NetworkHost transport: Sending
7 [A] AbstractNetworkNode networkLayer: Send (IP header=[69, 0, 0, 20,
    0, 0, 0, 0, 0, 6, -61, 34, 10, 10, 20, 1, -64, -88, 25, 15])
8 [A] AbstractNetworkNode linkLayer: Send (Ethernet header=[-86, -86,
    -86, -86, -86, -86, -86, -85, -48, -80, 0, -122, -69, -9, 0, -80,
    -48, -122, -69, -9, 0, 0, 0, 0, 0, 0, 0, -69, 82, 56, 56])
9 [A] AbstractNetworkNode physicalLayer: Send to network '10.10.20.0'
10 [R] AbstractNetworkNode physicalLayer: Received packet
11 [R] AbstractNetworkNode linkLayer: Received (Ethernet header=[-86, -
    86, -86, -86, -86, -86, -86, -85, -48, -80, 0, -122, -69, -9, 0,
    -80, -48, -122, -69, -9, 0, 0, 0, 0, 0, 0, 0, -69, 82, 56, 56])
12 [R] NetworkRouter networkLayer: Send (IP header=[69, 0, 0, 20, 0, 0,
    0, 0, 0, 6, -61, 34, 10, 10, 20, 1, -64, -88, 25, 15])
13 [R] AbstractNetworkNode linkLayer: Send (Ethernet header=[-86, -86,
    -86, -86, -86, -86, -86, -85, 0, -80, -48, -9, -122, -69, -80, 0,
    -48, -122, -69, -9, 0, 0, 0, 0, 0, 0, 0, -78, 122, 21, -108])

```

```

14 [R] AbstractNetworkNode physicalLayer: Send to network '192.168.25.0
    ,
15 [C] AbstractNetworkNode physicalLayer: Received packet
16 [C] AbstractNetworkNode linkLayer: Received (Ethernet header=[-86, -
    86, -86, -86, -86, -86, -85, 0, -80, -48, -9, -122, -69, -80
    , 0, -48, -122, -69, -9, 0, 0, 0, 0, 0, 0, -78, 122, 21, -108])
17 [C] AbstractNetworkNode networkLayer: Received (IP header=[69, 0, 0,
    20, 0, 0, 0, 0, 0, 6, -61, 34, 10, 10, 20, 1, -64, -88, 25, 15])
18 [C] NetworkHost transport: Received
19 [C] NetworkHost transport: Adding Segment to buffer
20 [B] AbstractNetworkNode physicalLayer: Received packet
21 [B] AbstractNetworkNode linkLayer: Received (Ethernet header=[-86, -
    86, -86, -86, -86, -86, -85, 0, -80, -48, -9, -122, -69, -80
    , 0, -48, -122, -69, -9, 0, 0, 0, 0, 0, 0, -78, 122, 21, -108])
22 [B] AbstractNetworkNode linkLayer: Payload with destination MAC '00:
    b0:d0:f7:86:bb' does not belong to me!
23 [A] NetworkHost transport: Sending
24 [A] AbstractNetworkNode networkLayer: Send (IP header=[69, 0, 0, 20,
    0, 1, 0, 0, 0, 6, -61, 33, 10, 10, 20, 1, -64, -88, 25, 15])
25 [A] AbstractNetworkNode linkLayer: Send (Ethernet header=[-86, -86,
    -86, -86, -86, -86, -85, -48, -80, 0, -122, -69, -9, 0, -80,
    -48, -122, -69, -9, 0, 0, 0, 0, 0, 0, 113, 95, 73, 83])
26 [A] AbstractNetworkNode physicalLayer: Send to network '10.10.20.0'
27 [R] AbstractNetworkNode physicalLayer: Received packet
28 [R] AbstractNetworkNode linkLayer: Received (Ethernet header=[-86, -
    86, -86, -86, -86, -86, -85, -48, -80, 0, -122, -69, -9, 0,
    -80, -48, -122, -69, -9, 0, 0, 0, 0, 0, 0, 113, 95, 73, 83])
29 [R] NetworkRouter networkLayer: Send (IP header=[69, 0, 0, 20, 0, 1,
    0, 0, 0, 6, -61, 33, 10, 10, 20, 1, -64, -88, 25, 15])
30 [R] AbstractNetworkNode linkLayer: Send (Ethernet header=[-86, -86,
    -86, -86, -86, -86, -85, 0, -80, -48, -9, -122, -69, -80, 0,
    -48, -122, -69, -9, 0, 0, 0, 0, 0, 0, 120, 119, 100, -1])
31 [R] AbstractNetworkNode physicalLayer: Send to network '192.168.25.0
    ,
32 [C] AbstractNetworkNode physicalLayer: Received packet
33 [C] AbstractNetworkNode linkLayer: Received (Ethernet header=[-86, -
    86, -86, -86, -86, -86, -85, 0, -80, -48, -9, -122, -69, -80
    , 0, -48, -122, -69, -9, 0, 0, 0, 0, 0, 0, 120, 119, 100, -1])
34 [C] AbstractNetworkNode networkLayer: Received (IP header=[69, 0, 0,
    20, 0, 1, 0, 0, 0, 6, -61, 33, 10, 10, 20, 1, -64, -88, 25, 15])
35 [C] NetworkHost transport: Received
36 [C] NetworkHost transport: Adding Segment to buffer
37
38 ..... REMOVED EXTRA LOGGING TO REDUCE THE OUTPUT FILE SIZE .....
39
40 [A] NetworkHost transport: Sending
41 [A] AbstractNetworkNode networkLayer: Send (IP header=[69, 0, 0, 20,
    0, 92, 0, 0, 0, 6, -62, -58, 10, 10, 20, 1, -64, -88, 25, 15])
42 [A] AbstractNetworkNode linkLayer: Send (Ethernet header=[-86, -86,
    -86, -86, -86, -86, -85, -48, -80, 0, -122, -69, -9, 0, -80,
    -48, -122, -69, -9, 0, 0, 0, 0, 0, 0, -87, -35, 18, 39])
43 [A] AbstractNetworkNode physicalLayer: Send to network '10.10.20.0'
44 [R] AbstractNetworkNode physicalLayer: Received packet

```

```

45 [R] AbstractNetworkNode linkLayer: Received (Ethernet header=[-86, -
    86, -86, -86, -86, -86, -85, -48, -80, 0, -122, -69, -9, 0,
    -80, -48, -122, -69, -9, 0, 0, 0, 0, 0, 0, -87, -35, 18, 39])
46 [R] NetworkRouter networkLayer: Send (IP header=[69, 0, 0, 20, 0, 92
    , 0, 0, 0, 6, -62, -58, 10, 10, 20, 1, -64, -88, 25, 15])
47 [R] AbstractNetworkNode linkLayer: Send (Ethernet header=[-86, -86,
    -86, -86, -86, -86, -85, 0, -80, -48, -9, -122, -69, -80, 0,
    -48, -122, -69, -9, 0, 0, 0, 0, 0, 0, 74, -17, 21, -91])
48 [R] AbstractNetworkNode physicalLayer: Send to network '192.168.25.0
    ,
49 [C] AbstractNetworkNode physicalLayer: Received packet
50 [C] AbstractNetworkNode linkLayer: Received (Ethernet header=[-86, -
    86, -86, -86, -86, -86, -85, 0, -80, -48, -9, -122, -69, -80
    , 0, -48, -122, -69, -9, 0, 0, 0, 0, 0, 0, 74, -17, 21, -91])
51 [C] AbstractNetworkNode networkLayer: Received (IP header=[69, 0, 0,
    20, 0, 92, 0, 0, 0, 6, -62, -58, 10, 10, 20, 1, -64, -88, 25, 15
    ])
52 [C] NetworkHost transport: Received
53 [C] NetworkHost transport: Adding Segment to buffer
54 [C] NetworkHost transport: Received last segment
55 [C] NetworkHost transport: Assembling 93 segments
56 [C] NetworkHost application: Wrote file 'file-0.bin'
57 [B] AbstractNetworkNode physicalLayer: Received packet
58 [B] AbstractNetworkNode linkLayer: Received (Ethernet header=[-86, -
    86, -86, -86, -86, -86, -85, 0, -80, -48, -9, -122, -69, -80
    , 0, -48, -122, -69, -9, 0, 0, 0, 0, 0, 0, 74, -17, 21, -91])
59 [B] AbstractNetworkNode linkLayer: Payload with destination MAC '00:
    b0:d0:f7:86:bb' does not belong to me!

```

5.4. 276 KB File transfer from Node-B to Node-A (A.gif)

```

1 [C] NetworkHost run: Starting with observable directory: 'C:\tmp\C'
2 [A] NetworkHost run: Starting with observable directory: 'C:\tmp\A'
3 [B] NetworkHost run: Starting with observable directory: 'C:\tmp\B'
4 [B] NetworkHost run: New files discovered
5 [B] NetworkHost run: A.gif read, sending to transport layer...
6 [B] NetworkHost transport: Sending
7 [B] AbstractNetworkNode networkLayer: Send (IP header=[69, 0, 0, 20,
    0, 0, 0, 0, 0, 6, -61, 29, -64, -88, 25, 20, 10, 10, 20, 1])
8 [B] AbstractNetworkNode linkLayer: Send (Ethernet header=[-86, -86,
    -86, -86, -86, -86, -85, -80, 0, -48, -122, -69, -9, 0, -80,
    -48, -122, -9, -69, 0, 0, 0, 0, 0, 0, -58, 102, -109, 124])
9 [B] AbstractNetworkNode physicalLayer: Send to network '192.168.25.0
    ,
10 [C] AbstractNetworkNode physicalLayer: Received packet
11 [C] AbstractNetworkNode linkLayer: Received (Ethernet header=[-86, -
    86, -86, -86, -86, -86, -85, -80, 0, -48, -122, -69, -9, 0,
    -80, -48, -122, -9, -69, 0, 0, 0, 0, 0, 0, -58, 102, -109, 124])
12 [C] AbstractNetworkNode linkLayer: Payload with destination MAC 'b0:
    00:d0:86:bb:f7' does not belong to me!
13 [R] AbstractNetworkNode physicalLayer: Received packet
14 [R] AbstractNetworkNode linkLayer: Received (Ethernet header=[-86, -
    86, -86, -86, -86, -86, -85, -80, 0, -48, -122, -69, -9, 0,

```



```

-80, -48, -122, -9, -69, 0, 0, 0, 0, 0, -58, 102, -109, 124])
15 [R] NetworkRouter networkLayer: Send (IP header=[69, 0, 0, 20, 0, 0,
    0, 0, 0, 6, -61, 29, -64, -88, 25, 20, 10, 10, 20, 1])
16 [R] AbstractNetworkNode linkLayer: Send (Ethernet header=[-86, -86,
    -86, -86, -86, -86, -85, 0, -80, -48, -122, -69, -9, -48, -8
    0, 0, -122, -69, -9, 0, 0, 0, 0, 0, 0, -67, 37, -93, -63])
17 [R] AbstractNetworkNode physicalLayer: Send to network '10.10.20.0'
18 [A] AbstractNetworkNode physicalLayer: Received packet
19 [A] AbstractNetworkNode linkLayer: Received (Ethernet header=[-86, -
    86, -86, -86, -86, -86, -85, 0, -80, -48, -122, -69, -9, -48
    , -80, 0, -122, -69, -9, 0, 0, 0, 0, 0, 0, -67, 37, -93, -63])
20 [A] AbstractNetworkNode networkLayer: Received (IP header=[69, 0, 0,
    20, 0, 0, 0, 0, 0, 6, -61, 29, -64, -88, 25, 20, 10, 10, 20, 1])
21 [A] NetworkHost transport: Received
22 [A] NetworkHost transport: Adding Segment to buffer
23 [B] NetworkHost transport: Sending
24 [B] AbstractNetworkNode networkLayer: Send (IP header=[69, 0, 0, 20,
    0, 1, 0, 0, 0, 6, -61, 28, -64, -88, 25, 20, 10, 10, 20, 1])
25 [B] AbstractNetworkNode linkLayer: Send (Ethernet header=[-86, -86,
    -86, -86, -86, -86, -85, -80, 0, -48, -122, -69, -9, 0, -80,
    -48, -122, -9, -69, 0, 0, 0, 0, 0, 0, 26, -113, 68, -33])
26 [B] AbstractNetworkNode physicalLayer: Send to network '192.168.25.0
    ,
27 [C] AbstractNetworkNode physicalLayer: Received packet
28 [C] AbstractNetworkNode linkLayer: Received (Ethernet header=[-86, -
    86, -86, -86, -86, -86, -85, -80, 0, -48, -122, -69, -9, 0,
    -80, -48, -122, -9, -69, 0, 0, 0, 0, 0, 0, 26, -113, 68, -33])
29 [C] AbstractNetworkNode linkLayer: Payload with destination MAC 'b0:
    00:d0:86:bb:f7' does not belong to me!
30 [R] AbstractNetworkNode physicalLayer: Received packet
31 [R] AbstractNetworkNode linkLayer: Received (Ethernet header=[-86, -
    86, -86, -86, -86, -86, -85, -80, 0, -48, -122, -69, -9, 0,
    -80, -48, -122, -9, -69, 0, 0, 0, 0, 0, 0, 26, -113, 68, -33])
32 [R] NetworkRouter networkLayer: Send (IP header=[69, 0, 0, 20, 0, 1,
    0, 0, 0, 6, -61, 28, -64, -88, 25, 20, 10, 10, 20, 1])
33 [R] AbstractNetworkNode linkLayer: Send (Ethernet header=[-86, -86,
    -86, -86, -86, -86, -85, 0, -80, -48, -122, -69, -9, -48, -8
    0, 0, -122, -69, -9, 0, 0, 0, 0, 0, 0, 97, -52, 116, 98])
34 [R] AbstractNetworkNode physicalLayer: Send to network '10.10.20.0'
35 [A] AbstractNetworkNode physicalLayer: Received packet
36 [A] AbstractNetworkNode linkLayer: Received (Ethernet header=[-86, -
    86, -86, -86, -86, -86, -85, 0, -80, -48, -122, -69, -9, -48
    , -80, 0, -122, -69, -9, 0, 0, 0, 0, 0, 0, 97, -52, 116, 98])
37 [A] AbstractNetworkNode networkLayer: Received (IP header=[69, 0, 0,
    20, 0, 1, 0, 0, 0, 6, -61, 28, -64, -88, 25, 20, 10, 10, 20, 1])
38 [A] NetworkHost transport: Received
39 [A] NetworkHost transport: Adding Segment to buffer
40
41 ..... REMOVED EXTRA LOGGING TO REDUCE THE OUTPUT FILE SIZE .....
42
43 [B] NetworkHost transport: Sending
44 [B] AbstractNetworkNode networkLayer: Send (IP header=[69, 0, 0, 20,
    0, -44, 0, 0, 0, 6, -62, 73, -64, -88, 25, 20, 10, 10, 20, 1])

```

```

45 [B] AbstractNetworkNode linkLayer: Send (Ethernet header=[-86, -86,
    -86, -86, -86, -86, -86, -85, -80, 0, -48, -122, -69, -9, 0, -80,
    -48, -122, -9, -69, 0, 0, 0, 0, 0, 0, 0, 24, -54, -2])
46 [B] AbstractNetworkNode physicalLayer: Send to network '192.168.25.0
    ,
47 [C] AbstractNetworkNode physicalLayer: Received packet
48 [C] AbstractNetworkNode linkLayer: Received (Ethernet header=[-86, -
    86, -86, -86, -86, -86, -86, -85, -80, 0, -48, -122, -69, -9, 0,
    -80, -48, -122, -9, -69, 0, 0, 0, 0, 0, 0, 0, 24, -54, -2])
49 [C] AbstractNetworkNode linkLayer: Payload with destination MAC 'b0:
    00:d0:86:bb:f7' does not belong to me!
50 [R] AbstractNetworkNode physicalLayer: Received packet
51 [R] AbstractNetworkNode linkLayer: Received (Ethernet header=[-86, -
    86, -86, -86, -86, -86, -86, -85, -80, 0, -48, -122, -69, -9, 0,
    -80, -48, -122, -9, -69, 0, 0, 0, 0, 0, 0, 0, 24, -54, -2])
52 [R] NetworkRouter networkLayer: Send (IP header=[69, 0, 0, 20, 0, -4
    4, 0, 0, 0, 6, -62, 73, -64, -88, 25, 20, 10, 10, 20, 1])
53 [R] AbstractNetworkNode linkLayer: Send (Ethernet header=[-86, -86,
    -86, -86, -86, -86, -86, -85, 0, -80, -48, -122, -69, -9, -48, -8
    0, 0, -122, -69, -9, 0, 0, 0, 0, 0, 0, 0, -76, -109, -53, -114])
54 [R] AbstractNetworkNode physicalLayer: Send to network '10.10.20.0'
55 [A] AbstractNetworkNode physicalLayer: Received packet
56 [A] AbstractNetworkNode linkLayer: Received (Ethernet header=[-86, -
    86, -86, -86, -86, -86, -86, -85, 0, -80, -48, -122, -69, -9, -48
    , -80, 0, -122, -69, -9, 0, 0, 0, 0, 0, 0, 0, -76, -109, -53, -114])
57 [A] AbstractNetworkNode networkLayer: Received (IP header=[69, 0, 0,
    20, 0, -44, 0, 0, 0, 6, -62, 73, -64, -88, 25, 20, 10, 10, 20, 1
    ])
58 [A] NetworkHost transport: Received
59 [A] NetworkHost transport: Adding Segment to buffer
60 [A] NetworkHost transport: Received last segment
61 [A] NetworkHost transport: Assembling 213 segments
62 [A] NetworkHost application: Wrote file 'file-0.bin'

```

5.5. 4 KB File transfer from Node-C to Node-B (B.xls)

```

1 [C] NetworkHost run: Starting with observable directory: 'C:\tmp\C'
2 [A] NetworkHost run: Starting with observable directory: 'C:\tmp\A'
3 [B] NetworkHost run: Starting with observable directory: 'C:\tmp\B'
4 [C] NetworkHost run: New files discovered
5 [C] NetworkHost run: B.xls read, sending to transport layer...
6 [C] NetworkHost transport: Sending
7 [C] AbstractNetworkNode networkLayer: Send (IP header=[69, 0, 0, 20,
    0, 0, 0, 0, 0, 6, 7, 113, -64, -88, 25, 15, -64, -88, 25, 20])
8 [C] AbstractNetworkNode linkLayer: Send (Ethernet header=[-86, -86,
    -86, -86, -86, -86, -86, -85, 0, -80, -48, -122, -9, -69, 0, -80,
    -48, -9, -122, -69, 0, 0, 0, 0, 0, 0, 0, -25, -104, 46, -66])
9 [C] AbstractNetworkNode physicalLayer: Send to network '192.168.25.0
    ,
10 [R] AbstractNetworkNode physicalLayer: Received packet
11 [R] AbstractNetworkNode linkLayer: Received (Ethernet header=[-86, -
    86, -86, -86, -86, -86, -86, -85, 0, -80, -48, -122, -9, -69, 0,
    -80, -48, -9, -122, -69, 0, 0, 0, 0, 0, 0, 0, -25, -104, 46, -66])

```

```

12 [R] AbstractNetworkNode linkLayer: Payload with destination MAC '00:
    b0:d0:86:f7:bb' does not belong to me!
13 [B] AbstractNetworkNode physicalLayer: Received packet
14 [B] AbstractNetworkNode linkLayer: Received (Ethernet header=[-86, -
    86, -86, -86, -86, -86, -85, 0, -80, -48, -122, -9, -69, 0,
    -80, -48, -9, -122, -69, 0, 0, 0, 0, 0, 0, -25, -104, 46, -66])
15 [B] AbstractNetworkNode networkLayer: Received (IP header=[69, 0, 0,
    20, 0, 0, 0, 0, 0, 6, 7, 113, -64, -88, 25, 15, -64, -88, 25, 20
    ])
16 [B] NetworkHost transport: Received
17 [B] NetworkHost transport: Adding Segment to buffer
18 [C] NetworkHost transport: Sending
19 [C] AbstractNetworkNode networkLayer: Send (IP header=[69, 0, 0, 20,
    0, 1, 0, 0, 0, 6, 7, 112, -64, -88, 25, 15, -64, -88, 25, 20])
20 [C] AbstractNetworkNode linkLayer: Send (Ethernet header=[-86, -86,
    -86, -86, -86, -86, -85, 0, -80, -48, -122, -9, -69, 0, -80,
    -48, -9, -122, -69, 0, 0, 0, 0, 0, 0, 125, 120, -33, 79])
21 [C] AbstractNetworkNode physicalLayer: Send to network '192.168.25.0
    ,
22 [R] AbstractNetworkNode physicalLayer: Received packet
23 [R] AbstractNetworkNode linkLayer: Received (Ethernet header=[-86, -
    86, -86, -86, -86, -86, -85, 0, -80, -48, -122, -9, -69, 0,
    -80, -48, -9, -122, -69, 0, 0, 0, 0, 0, 0, 125, 120, -33, 79])
24 [R] AbstractNetworkNode linkLayer: Payload with destination MAC '00:
    b0:d0:86:f7:bb' does not belong to me!
25 [B] AbstractNetworkNode physicalLayer: Received packet
26 [B] AbstractNetworkNode linkLayer: Received (Ethernet header=[-86, -
    86, -86, -86, -86, -86, -85, 0, -80, -48, -122, -9, -69, 0,
    -80, -48, -9, -122, -69, 0, 0, 0, 0, 0, 0, 125, 120, -33, 79])
27 [B] AbstractNetworkNode networkLayer: Received (IP header=[69, 0, 0,
    20, 0, 1, 0, 0, 0, 6, 7, 112, -64, -88, 25, 15, -64, -88, 25, 20
    ])
28 [B] NetworkHost transport: Received
29 [B] NetworkHost transport: Adding Segment to buffer
30 [C] NetworkHost transport: Sending
31 [C] AbstractNetworkNode networkLayer: Send (IP header=[69, 0, 0, 20,
    0, 2, 0, 0, 0, 6, 7, 111, -64, -88, 25, 15, -64, -88, 25, 20])
32 [C] AbstractNetworkNode linkLayer: Send (Ethernet header=[-86, -86,
    -86, -86, -86, -86, -85, 0, -80, -48, -122, -9, -69, 0, -80,
    -48, -9, -122, -69, 0, 0, 0, 0, 0, 0, 25, 47, -116, -113])
33 [C] AbstractNetworkNode physicalLayer: Send to network '192.168.25.0
    ,
34 [R] AbstractNetworkNode physicalLayer: Received packet
35 [R] AbstractNetworkNode linkLayer: Received (Ethernet header=[-86, -
    86, -86, -86, -86, -86, -85, 0, -80, -48, -122, -9, -69, 0,
    -80, -48, -9, -122, -69, 0, 0, 0, 0, 0, 0, 25, 47, -116, -113])
36 [R] AbstractNetworkNode linkLayer: Payload with destination MAC '00:
    b0:d0:86:f7:bb' does not belong to me!
37 [B] AbstractNetworkNode physicalLayer: Received packet
38 [B] AbstractNetworkNode linkLayer: Received (Ethernet header=[-86, -
    86, -86, -86, -86, -86, -85, 0, -80, -48, -122, -9, -69, 0,
    -80, -48, -9, -122, -69, 0, 0, 0, 0, 0, 0, 25, 47, -116, -113])
39 [B] AbstractNetworkNode networkLayer: Received (IP header=[69, 0, 0,
    20, 0, 2, 0, 0, 0, 6, 7, 111, -64, -88, 25, 15, -64, -88, 25, 20

```

```

    ])
40 [B] NetworkHost transport: Received
41 [B] NetworkHost transport: Adding Segment to buffer
42 [B] NetworkHost transport: Received last segment
43 [B] NetworkHost transport: Assembling 3 segments
44 [B] NetworkHost application: Wrote file 'file-0.bin'

```

5.6. 13 KB File transfer from Node-C to Node-A (A.pdf)

```

1 [C] NetworkHost run: Starting with observable directory: 'C:\tmp\C'
2 [B] NetworkHost run: Starting with observable directory: 'C:\tmp\B'
3 [A] NetworkHost run: Starting with observable directory: 'C:\tmp\A'
4 [C] NetworkHost run: New files discovered
5 [C] NetworkHost run: A.pdf read, sending to transport layer...
6 [C] NetworkHost transport: Sending
7 [C] AbstractNetworkNode networkLayer: Send (IP header=[69, 0, 0, 20,
    0, 0, 0, 0, 6, -61, 34, -64, -88, 25, 15, 10, 10, 20, 1])
8 [C] AbstractNetworkNode linkLayer: Send (Ethernet header=[-86, -86,
    -86, -86, -86, -86, -86, -85, -80, 0, -48, -122, -69, -9, 0, -80,
    -48, -9, -122, -69, 0, 0, 0, 0, 0, 0, 106, 56, -61, -114])
9 [C] AbstractNetworkNode physicalLayer: Send to network '192.168.25.0'
10 [B] AbstractNetworkNode physicalLayer: Received packet
11 [B] AbstractNetworkNode linkLayer: Received (Ethernet header=[-86, -
    86, -86, -86, -86, -86, -86, -85, -80, 0, -48, -122, -69, -9, 0,
    -80, -48, -9, -122, -69, 0, 0, 0, 0, 0, 0, 106, 56, -61, -114])
12 [B] AbstractNetworkNode linkLayer: Payload with destination MAC 'b0:
    00:d0:86:bb:f7' does not belong to me!
13 [R] AbstractNetworkNode physicalLayer: Received packet
14 [R] AbstractNetworkNode linkLayer: Received (Ethernet header=[-86, -
    86, -86, -86, -86, -86, -86, -85, -80, 0, -48, -122, -69, -9, 0,
    -80, -48, -9, -122, -69, 0, 0, 0, 0, 0, 0, 106, 56, -61, -114])
15 [R] NetworkRouter networkLayer: Send (IP header=[69, 0, 0, 20, 0, 0,
    0, 0, 0, 6, -61, 34, -64, -88, 25, 15, 10, 10, 20, 1])
16 [R] AbstractNetworkNode linkLayer: Send (Ethernet header=[-86, -86,
    -86, -86, -86, -86, -86, -85, 0, -80, -48, -122, -69, -9, -48, -8
    0, 0, -122, -69, -9, 0, 0, 0, 0, 0, 0, -24, -116, -43, -86])
17 [R] AbstractNetworkNode physicalLayer: Send to network '10.10.20.0'
18 [A] AbstractNetworkNode physicalLayer: Received packet
19 [A] AbstractNetworkNode linkLayer: Received (Ethernet header=[-86, -
    86, -86, -86, -86, -86, -86, -85, 0, -80, -48, -122, -69, -9, -48
    , -80, 0, -122, -69, -9, 0, 0, 0, 0, 0, 0, -24, -116, -43, -86])
20 [A] AbstractNetworkNode networkLayer: Received (IP header=[69, 0, 0,
    20, 0, 0, 0, 0, 0, 6, -61, 34, -64, -88, 25, 15, 10, 10, 20, 1])
21 [A] NetworkHost transport: Received
22 [A] NetworkHost transport: Adding Segment to buffer
23 [C] NetworkHost transport: Sending
24 [C] AbstractNetworkNode networkLayer: Send (IP header=[69, 0, 0, 20,
    0, 1, 0, 0, 6, -61, 33, -64, -88, 25, 15, 10, 10, 20, 1])
25 [C] AbstractNetworkNode linkLayer: Send (Ethernet header=[-86, -86,
    -86, -86, -86, -86, -86, -85, -80, 0, -48, -122, -69, -9, 0, -80,
    -48, -9, -122, -69, 0, 0, 0, 0, 0, 0, 126, -94, 92, 13])

```

```

26 [C] AbstractNetworkNode physicalLayer: Send to network '192.168.25.0
    ,
27 [B] AbstractNetworkNode physicalLayer: Received packet
28 [B] AbstractNetworkNode linkLayer: Received (Ethernet header=[-86, -
    86, -86, -86, -86, -86, -85, -80, 0, -48, -122, -69, -9, 0,
    -80, -48, -9, -122, -69, 0, 0, 0, 0, 0, 0, 126, -94, 92, 13])
29 [B] AbstractNetworkNode linkLayer: Payload with destination MAC 'b0:
    00:d0:86:bb:f7' does not belong to me!
30 [R] AbstractNetworkNode physicalLayer: Received packet
31 [R] AbstractNetworkNode linkLayer: Received (Ethernet header=[-86, -
    86, -86, -86, -86, -86, -85, -80, 0, -48, -122, -69, -9, 0,
    -80, -48, -9, -122, -69, 0, 0, 0, 0, 0, 0, 126, -94, 92, 13])
32 [R] NetworkRouter networkLayer: Send (IP header=[69, 0, 0, 20, 0, 1,
    0, 0, 0, 6, -61, 33, -64, -88, 25, 15, 10, 10, 20, 1])
33 [R] AbstractNetworkNode linkLayer: Send (Ethernet header=[-86, -86,
    -86, -86, -86, -86, -85, 0, -80, -48, -122, -69, -9, -48, -8
    0, 0, -122, -69, -9, 0, 0, 0, 0, 0, 0, -4, 22, 74, 41])
34 [R] AbstractNetworkNode physicalLayer: Send to network '10.10.20.0'
35 [A] AbstractNetworkNode physicalLayer: Received packet
36 [A] AbstractNetworkNode linkLayer: Received (Ethernet header=[-86, -
    86, -86, -86, -86, -86, -85, 0, -80, -48, -122, -69, -9, -48
    , -80, 0, -122, -69, -9, 0, 0, 0, 0, 0, 0, -4, 22, 74, 41])
37 [A] AbstractNetworkNode networkLayer: Received (IP header=[69, 0, 0,
    20, 0, 1, 0, 0, 0, 6, -61, 33, -64, -88, 25, 15, 10, 10, 20, 1])
38 [A] NetworkHost transport: Received
39 [A] NetworkHost transport: Adding Segment to buffer
40
41 ..... REMOVED EXTRA LOGGING TO REDUCE THE OUTPUT FILE SIZE .....
42
43 [C] NetworkHost transport: Sending
44 [C] AbstractNetworkNode networkLayer: Send (IP header=[69, 0, 0, 20,
    0, 9, 0, 0, 0, 6, -61, 25, -64, -88, 25, 15, 10, 10, 20, 1])
45 [C] AbstractNetworkNode linkLayer: Send (Ethernet header=[-86, -86,
    -86, -86, -86, -86, -85, -80, 0, -48, -122, -69, -9, 0, -80,
    -48, -9, -122, -69, 0, 0, 0, 0, 0, 0, -88, 24, -77, 100])
46 [C] AbstractNetworkNode physicalLayer: Send to network '192.168.25.0
    ,
47 [B] AbstractNetworkNode physicalLayer: Received packet
48 [B] AbstractNetworkNode linkLayer: Received (Ethernet header=[-86, -
    86, -86, -86, -86, -86, -85, -80, 0, -48, -122, -69, -9, 0,
    -80, -48, -9, -122, -69, 0, 0, 0, 0, 0, 0, -88, 24, -77, 100])
49 [B] AbstractNetworkNode linkLayer: Payload with destination MAC 'b0:
    00:d0:86:bb:f7' does not belong to me!
50 [R] AbstractNetworkNode physicalLayer: Received packet
51 [R] AbstractNetworkNode linkLayer: Received (Ethernet header=[-86, -
    86, -86, -86, -86, -86, -85, -80, 0, -48, -122, -69, -9, 0,
    -80, -48, -9, -122, -69, 0, 0, 0, 0, 0, 0, -88, 24, -77, 100])
52 [R] NetworkRouter networkLayer: Send (IP header=[69, 0, 0, 20, 0, 9,
    0, 0, 0, 6, -61, 25, -64, -88, 25, 15, 10, 10, 20, 1])
53 [R] AbstractNetworkNode linkLayer: Send (Ethernet header=[-86, -86,
    -86, -86, -86, -86, -85, 0, -80, -48, -122, -69, -9, -48, -8
    0, 0, -122, -69, -9, 0, 0, 0, 0, 0, 0, -74, 3, -36, -101])
54 [R] AbstractNetworkNode physicalLayer: Send to network '10.10.20.0'
55 [A] AbstractNetworkNode physicalLayer: Received packet

```

```
56 [A] AbstractNetworkNode linkLayer: Received (Ethernet header=[-86, -  
    86, -86, -86, -86, -86, -85, 0, -80, -48, -122, -69, -9, -48  
    , -80, 0, -122, -69, -9, 0, 0, 0, 0, 0, 0, -74, 3, -36, -101])  
57 [A] AbstractNetworkNode networkLayer: Received (IP header=[69, 0, 0,  
    20, 0, 9, 0, 0, 0, 6, -61, 25, -64, -88, 25, 15, 10, 10, 20, 1])  
58 [A] NetworkHost transport: Received  
59 [A] NetworkHost transport: Adding Segment to buffer  
60 [A] NetworkHost transport: Received last segment  
61 [A] NetworkHost transport: Assembling 10 segments  
62 [A] NetworkHost application: Wrote file 'file-0.bin'
```

A. Assignment Topology

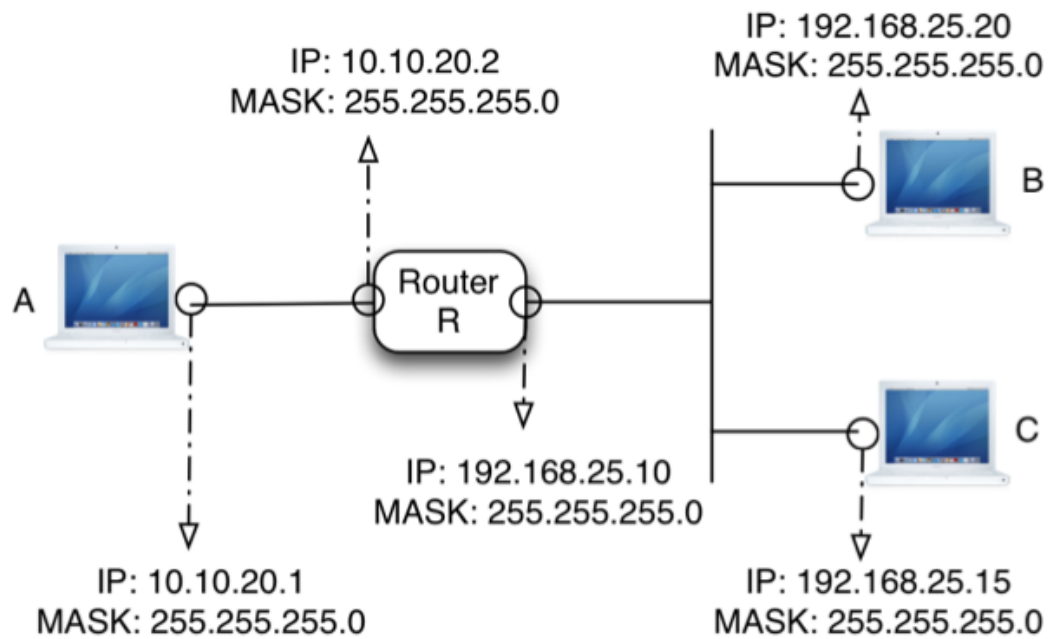


Figure 1: Network topology for the assignment

B. Topology Definition JSON

```
1 {
2   "nodes": [{
3     "type": "host",
4     "id": "A",
5     "ip": "10.10.20.1",
6     "mask": "255.255.255.0",
7     "mac": "00:B0:D0:86:BB:F7",
8     "mtu": 1400,
9     "gateway": "10.10.20.2",
10    "routing": [
11      {"network": "192.168.25/24", "nextHop": "10.10.20.2"}
12    ]
13  }, {
14    "type": "host",
15    "id": "B",
16    "ip": "192.168.25.20",
17    "mask": "255.255.255.0",
18    "mac": "00:B0:D0:86:F7:BB",
19    "mtu": 1400,
20    "gateway": "192.168.25.10",
21    "routing": [
22      {"network": "192.168.25.15", "nextHop": "192.168.25.15"},
23      {"network": "10.10.20/24", "nextHop": "192.168.25.10"}
24    ]
25  }, {
26    "type": "host",
27    "id": "C",
28    "ip": "192.168.25.15",
29    "mask": "255.255.255.0",
30    "mac": "00:B0:D0:F7:86:BB",
31    "mtu": 1400,
32    "gateway": "192.168.25.10",
33    "routing": [
34      {"network": "192.168.25.20", "nextHop": "192.168.25.20"},
35      {"network": "10.10.20/24", "nextHop": "192.168.25.10"}
36    ]
37  }, {
38    "type": "router",
39    "id": "R",
40    "ports": [{
41      "ip": "10.10.20.2",
42      "mask": "255.255.255.0",
43      "mac": "D0:B0:00:86:BB:F7",
44      "mtu": 1400
45    }, {
46      "ip": "192.168.25.10",
47      "mask": "255.255.255.0",
48      "mac": "B0:00:D0:86:BB:F7",
49      "mtu": 1400
50    }
51  ]
52 }
```



```
52     "routing": [  
53         {"network": "10.10.20.1", "nextHop": "10.10.20.1"},  
54         {"network": "192.168.25.20", "nextHop": "192.168.25.20"},  
55         {"network": "192.168.25.15", "nextHop": "192.168.25.15"}  
56     ]  
57 },  
58 "macTable": [  
59     {"ip": "10.10.20.1", "mac": "00:B0:D0:86:BB:F7"},  
60     {"ip": "192.168.25.20", "mac": "00:B0:D0:86:F7:BB"},  
61     {"ip": "192.168.25.15", "mac": "00:B0:D0:F7:86:BB"},  
62     {"ip": "10.10.20.2", "mac": "D0:B0:00:86:BB:F7"},  
63     {"ip": "192.168.25.10", "mac": "B0:00:D0:86:BB:F7"}  
64 ]  
65 }
```

References

- [1] Dr. Marco Carvalho, *CSE5231 - Class Project*, Florida Institute of Technology, Fall 2013.