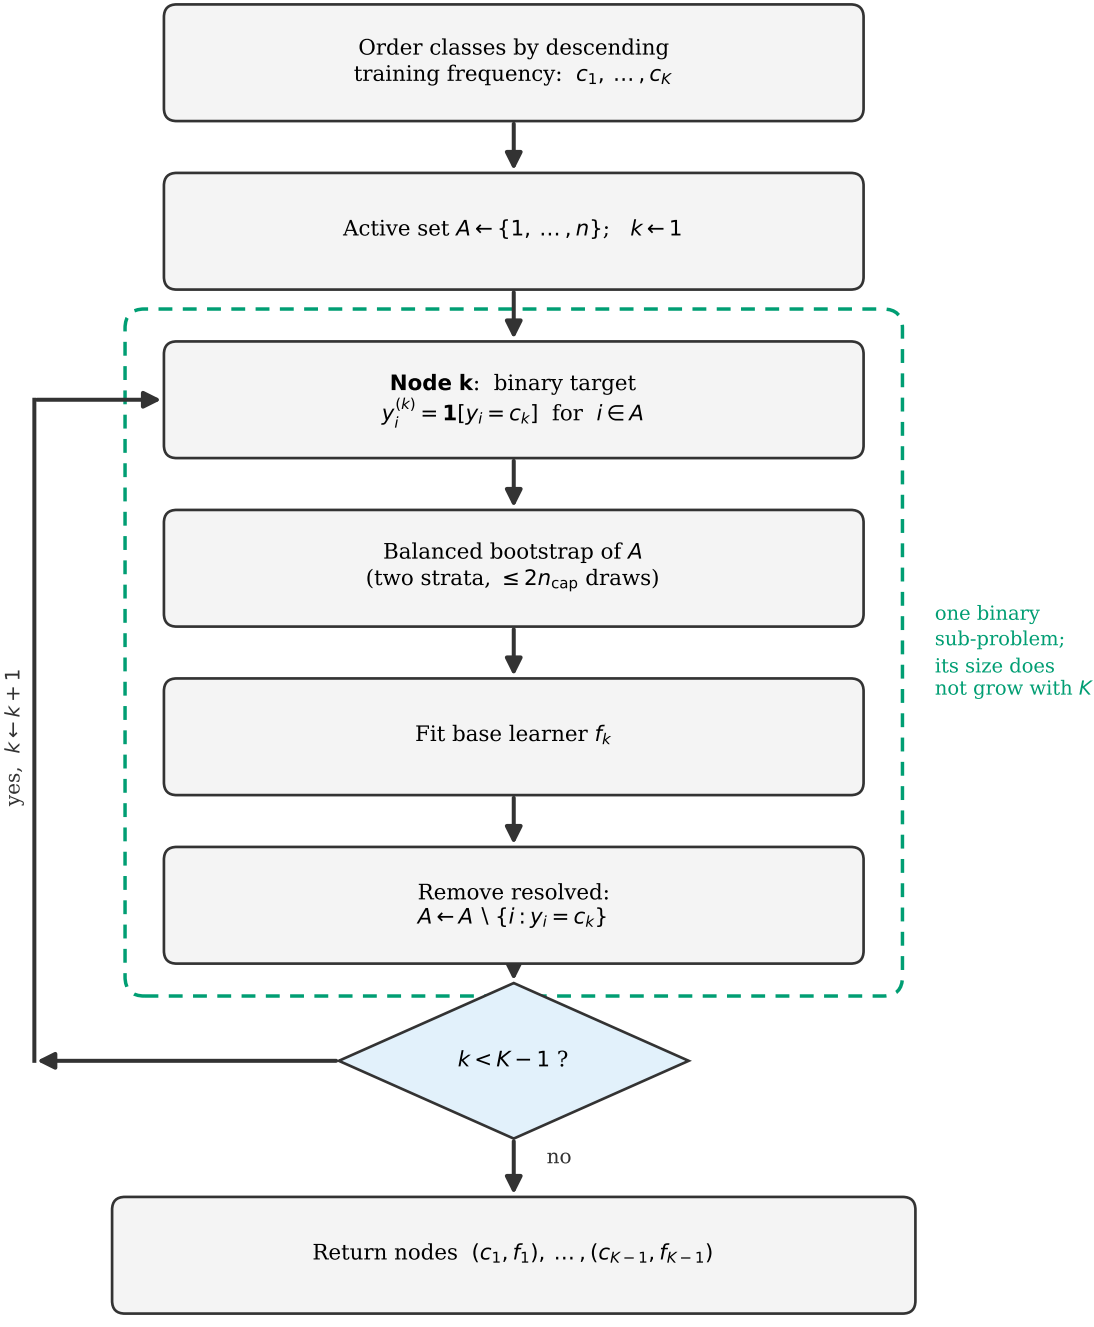
Order classes by descending training frequency: $c_1, \ldots, c_K$
Active set $A \leftarrow \{1, \ldots, n\}$; $k \leftarrow 1$
Node k: binary target $y_i^{(k)} = \mathbf{1}[y_i = c_k]$ for $i \in A$
Balanced bootstrap of A (two strata, $\leq 2n_{\text{cap}}$ draws)
Fit base learner f_k
Remove resolved: $A \leftarrow A \setminus \{i : y_i = c_k\}$
one binary sub-problem; its size does not grow with K
$k < K-1$?
yes, $k \leftarrow k+1$
no
Return nodes $(c_1, f_1), \ldots, (c_{K-1}, f_{K-1})$