


# SQL Introduction

Database :- It is an Organized collection of data so that it can be easily accessed.

To manage these databases, DBMS (Database Management System) are used.

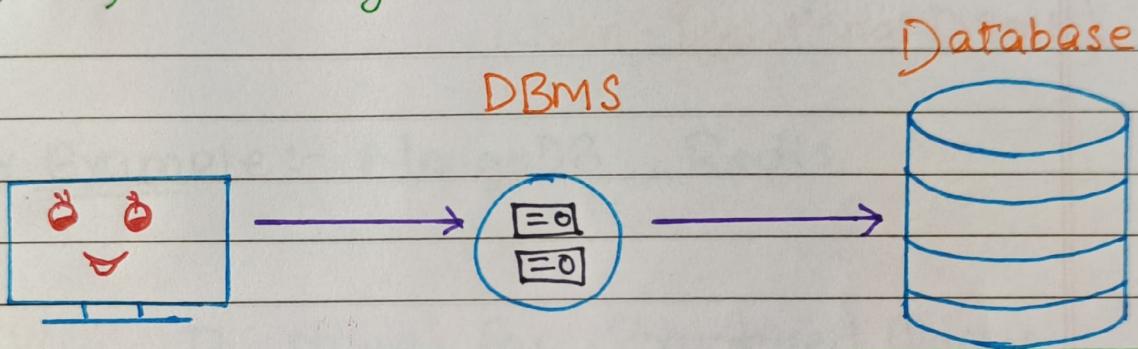

## Types of DBMS :-

- Relational DBMS
- Non-Relational DBMS

ATUL KUMAR (LinkedIn/Twitter)  
NOTES GALLERY/CODING BUGS (Telegram)

Relational DBMS :- In this DBMS, data stored in table format.

Roll No	Name	Class
1	Jai	5 <sup>th</sup>
2	Amar	7 <sup>th</sup>
3	Anuj	5 <sup>th</sup>
4	Ram	8 <sup>th</sup>

For Example:- MySQL, Oracle.



Non-Relational DBMS :- In this DBMS data is stored in Key-value pair.


```
{  
    "ROLLNO": 1,  
    "CLASS": "5th",  
    "NAME": "Jai"  
}
```

(Non-Relational DBMS).

For Example:- MongoDB, Redis

SQL :- It stand for Structured Query Language.

SQL is used for update, delete, insert data in table or Relational Database.

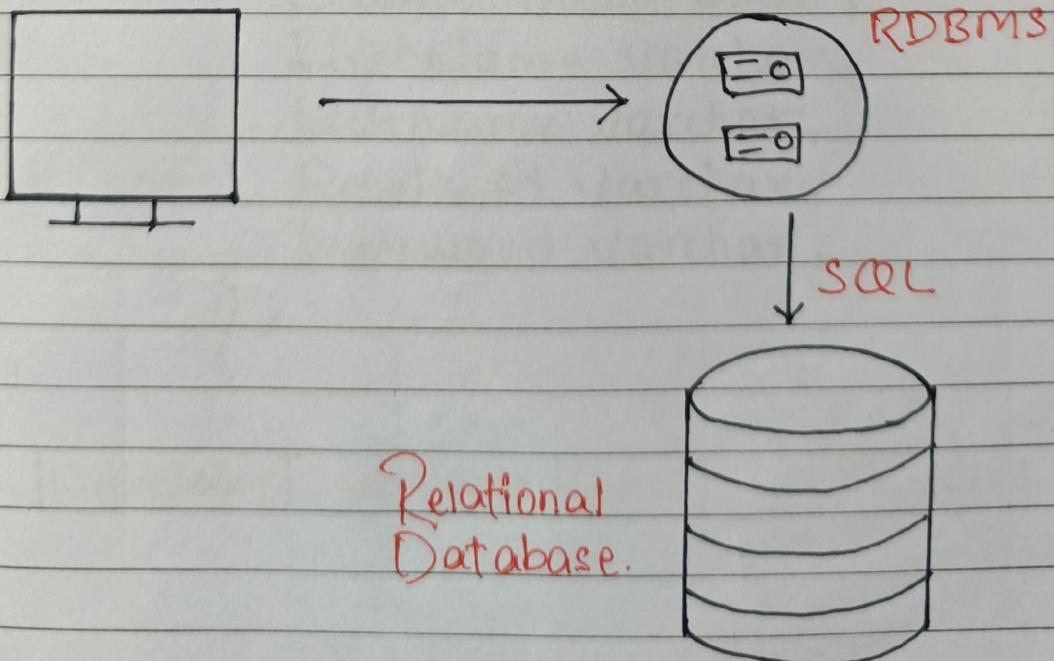

## SQL CREATE Command :-

It is used for create Tables.

### Syntax :-

```
CREATE TABLE tablename (
    column1 datatype,
    column2 datatype,
    -----
);
```

SQL Keywords are case-insensitive.

In MySQL, case-insensitive is an option you can turn on and off.

### For Example :-

```
CREATE TABLE User (
    FirstName varchar,
    LastName varchar,
    Email_id varchar,
    Password varchar,
);
;
```

FirstName	LastName	Email_id	Password
-----------	----------	----------	----------



## SQL INSERT INTO Command :-

It is used to insert data into tables.

### Syntax:-

```
INSERT INTO tableName (column1,
                      column2...)
VALUES (value1, value2...);
```

- A row of database table is known as record or a tuple.
- A column of database table is known as an attribute.


### For Example:-

```
INSERT INTO USER (FirstName,
                  LastName, Email-id, Password)
VALUES (Jai, Sharma, abc@gmail.com,
        abc#123);
```

FirstName	LastName	Email-id	Password
Jai	Sharma	abc@gmail	abc#123

### How to Insert Multiple Record (row, tuple) :-

```
VALUES (Jai, Sharma, abc@gmail.com, 123),
       (Jaya, Sharma, xyz@gmail.com, abc);
```



## SQL SELECT Command :-

It is used to retrieves data from the table.

### Syntax:-

```
SELECT Column 1, Column 2  
From tableName;
```

- To Select Complete table, use \* (star)
 

```
SELECT *  
From tableName;
```

### Example:-

FirstName	Last Name	Password
Jai	Kumar	123
Jaya	Singh	abc
Amit	Sharma	xyz

Table :- USER

### Command:-

```
SELECT FirstName  
From USER;
```


### Output:-

ATUL KUMAR (LinkedIn / Twitter)  
NOTES GALLERY / CODING BUGS (Telegram)

FirstName
Jai
Jaya
Amit



# How Does SQL Work

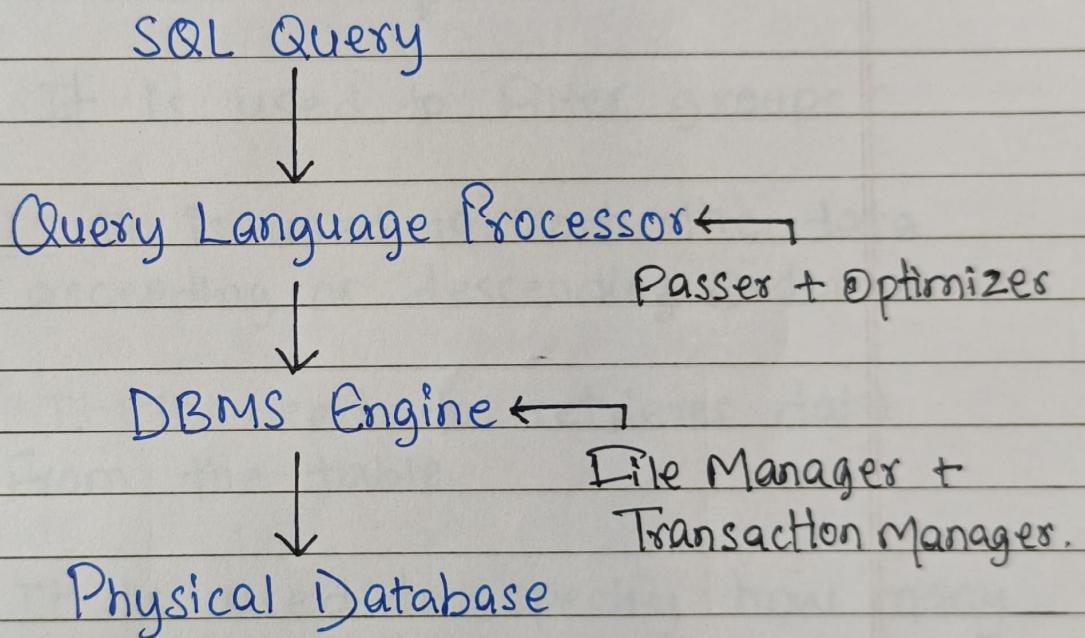

Passing :- In this Process, Query statement is tokenized.

Optimising :- It Optimize the best algorithm for the byte code.

FROM :- It is used to specify the tables from which data fetched.



WHERE :- It is used to filter records based on the given condition.

JOIN :- It is used to combine data from tables based on a common field.

GROUP BY :- It is used to group records based on our requirement.

HAVING :- It is used to filter groups.

ORDER BY :- It is used to sort the data in ascending or descending Order.

SELECT :- It is used to retrieves data from the table.


LIMIT :- It is used to specify how many rows are returned.



# SQL

## Constraints

Arul Kumar (LinkedIn/Twitter)  
NOTES GALLERY/CODING BUGS (Telegram)

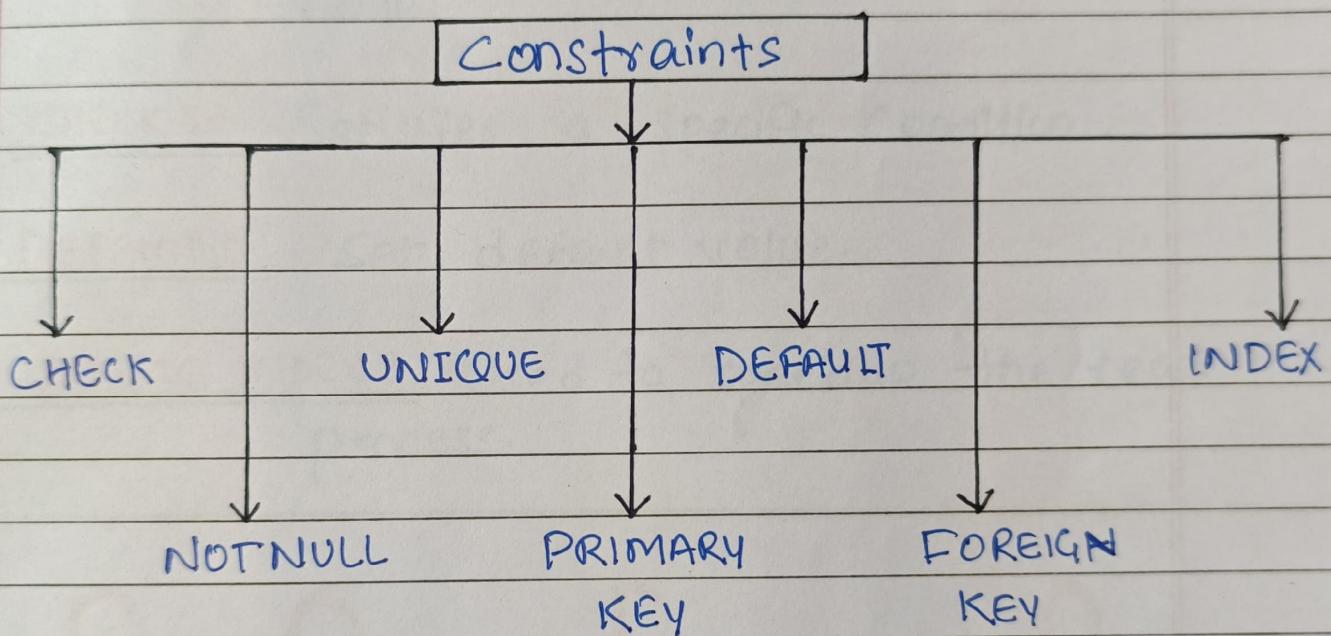


These Constraints also Known as Integrity Constraints.

- SQL Constraints :- Constraints are the rules and restrictions applied on the data in a table.



- NOT NULL :- Value Cannot be Null in a column.
- UNIQUE :- Value Cannot be same in a column.
- PRIMARY KEY :- Used uniquely identify a row.
- FOREIGN KEY :- References a row in another table.
- CHECK :- Satisfies a specific condition .
- DEFAULT :- Set default value.
- CREATE INDEX :- Used to speedup the read process.

## SQL QUERY EXECUTION ORDER

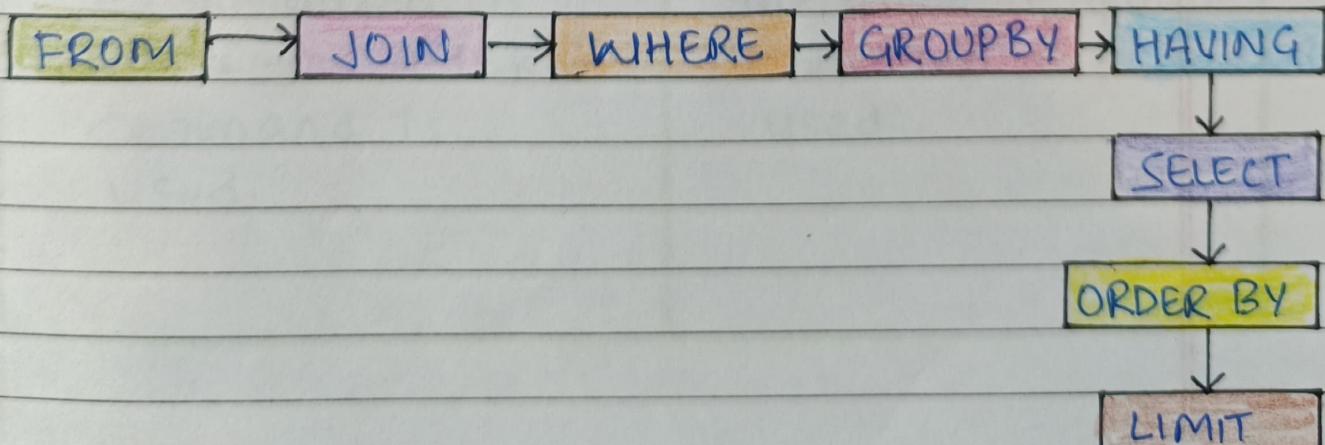

# DIFFERENCE BETWEEN ALTER AND UPDATE

ATUL RUMAAR (LinkedIn/Twitter)  
NOTES GALLERY/CODING BUREAU (Twitter)

ALTER	UPDATE
• It is a DDL.	• It is a DML.
• It is used for adding, deleting, and modifying attributes of the table.	• It is used for updating the data in the existing table.
• Changes are made to the table structure.	• Changes are made to the data.
• By default, all the values in the tuple are initialized as null if the ALTER command is used.	• It sets the specified value to the tuple if update command is used.



## SQL SELECT DISTINCT :-

It is used to return only unique values from a specified column in a table.

### Syntax :-

```
SELECT DISTINCT Column_name  
FROM table_name;
```

### Example :-

FirstName	Last Name	Password
Jai	Kumar	123
Jaya	Singh	123
Amit	Sharma	xyz

### Command :-

```
SELECT Distinct Password  
FROM USER;
```

### Output :-

Password
123
xyz



## SQL WHERE CLAUSE :-

It is used to filter rows in a table based on a specified condition.

### Syntax :-

```
SELECT Column_name
FROM table_name
WHERE Condition;
```

### Example :-

FirstName	LastName	Age
Jai	Kumar	19
Jaya	Singh	20
Amit	Sharma	21

Table :- USER

### Command :-

```
SELECT FirstName, LastName
FROM USER
WHERE Age > 20;
```

### Output :-

FirstName	LastName
Amit	Sharma



## SQL AND :-

The AND Operator returns true if both condition are true, and false otherwise.

### Syntax:-

WHERE Condition1 AND Condition2;

## SQL OR :-

ATUL KUMAR (LinkedIn/Twitter)  
NOTES GALLERY / CODING BUGS (Telegram)

It returns true if either condition is true, and false if both conditions are false.

### Syntax:-

WHERE Condition1 OR Condition2;

## SQL NOT :-

It returns the opposite of a condition.

### Syntax:-

WHERE NOT Condition;

AND, OR , NOT Operator are used to combine Conditions in a where clause to Create More complex Filtering Conditions.



## SQL ORDER BY :-

It is used to sort the result of a query in ascending or descending order.

### Syntax :-

```
SELECT Column1, column2, ...
FROM table-name
ORDER By Column1 [ASC][DESC], Column2
[ASC][DESC], ...
```

ASC :- It is used to sort the result in ascending order.

DESC :- It is used to sort the result in descending order.

### Example :-

FirstName	LastName	Age
Jai	Kumar	49
Jaya	Singh	20
Amit	Sharma	21

Table :- User.

### Command :-

```
SELECT * FROM user
ORDER BY Age;
```



Output :-

First Name	Last Name	Age
Jaya	Singh	20
Amit	Sharma	21
Jay	Kumar	49

INSERT INFO :-

It is used to insert data into a table.

Syntax :-

Insert into tablename (column1, column2,...)  
values (value1, value2, ...);

Note :- These must be the same number of values as the same number of columns specified.

Example :-

FirstName	LastName	Age.
Jai	Kumar	10
Jaya	Singh	15
Amit	Sharma	20

Table :- user

Command :-

Insert into user (FirstName, LastName, Age)  
values (abc, xyz, 25);



Output:-

First Name	Last Name	Age.
Jai	Kumar	10
Jaya	Singh	15
Amit	Sharma	20
abc	xyz	25

SQL NULL Values:-

It is used represent missing or unknown data.

Note:- Null is different from zero or empty string.

ATUL KUMAR (LinkedIn / Twitter)  
NOTES GALLERY / CODING BUGS (Telegram)

Insert NULL value:-

INSERT INTO tablename (Column 1, Column 2, ...)  
VALUES (value1, NULL, ...);

To check for Null values:-

IS NULL :-

SELECT Column 1, Column 2, ...  
From table-name  
WHERE Column 2 IS NULL;



### IS NOT NULL :-

```
SELECT Column1, Column2, ...
FROM table-name
WHERE column1 IS NOT NULL;
```

### SQL UPDATE :-

It is used to modify existing data in table.

#### Syntax :-

```
UPDATE table-name
SET Column1 = Value1, Column2 = Value2, ...
WHERE SomeColumn = SomeValue;
```

#### Syntax :- SET :-

It is used to specify the column and values to update.

#### Example :-

FirstName	Last Name	Age
Jai	Kumar	10
Jaya	Singh	15
Amit	Sharma	20

Table :- Users



Command :-

UPDATE USERS

SET age = age + 1 ;

Output :-

FirstName	LastName	Age
Jai	Kumar	11
Jaya	Singh	16
Amit	Sharma	21

SQL DELETE :-

ATUL KUMAR (LinkedIn/Twitter)  
NOTES GALLERY/CODING BUGS (Telegram)


It is used to remove existing record from a table in a SQL Database.

Syntax :-

DELETE FROM tablename WHERE condition;

Note :-

This Operation is not reversible, so be careful when using DELETE statements !



## SQL Wildcards :-

Wildcards are special characters used in SQL 'LIKE' operator to search for a specific pattern in a column of a table.

- The percent sign (%) represents zero, one or multiple characters.
- The underscore sign (\_) represents one, single character.

## SQL LIKE :-

It is used to search for a specific pattern in a column of a table.

### Syntax :-

```
SELECT Column1, Column2, ...
FROM table_name
WHERE Column_name LIKE Pattern;
```

## SQL IN :-

It is used to specify multiple values in a WHERE clause for filtering data.



Syntax :-

SELECT Column1, Column2...

FROM table-name

WHERE Column\_name IN (value1, value2);

SQL Between :-

It is used to filter data based on a range of values in a WHERE clause.

Syntax :-

SELECT Column1, Column2,...

FROM table-name

WHERE Column\_name Between  
value1 AND value2;

SQL Alias :-

It is used to give a temporary name to a table or a column in a query.

Syntax :-

SELECT Column-name as alias-name  
from table-name;



## SQL UNION Operator :-

It is used to combine the result sets of two or more SELECT statements into a single result sets.

### Note:-

It returns only distinct rows.

### Syntax:-

```
SELECT Column_name
FROM table_name_1
UNION
SELECT Column_name
FROM table_name_2;
```

### Example:-

SELECT A

1
2
3

Union

SELECT B

3
4
5

1
2
3
4
5



## SQL GROUP BY :-

It is used to group rows that have the same values into Summary rows, Like "Find the number of customers in each city."

## SQL HAVING :-

It is used to filter the results of a 'GROUP BY' query Based on the values of an aggregate function.

ATUL KUMAR (LinkedIn / Twitter)

NOTES GALLERY / CODING BUGS (Telegram)

## SQL EXISTS :-

It is used to check if a subquery returns any rows.

It returns a boolean value.

## SQL ALL :-

It is used to compare a value with the result of a subquery.

It returns true if the value is true for all elements.



### SQL ANY :-

It is also a Comparison Operator.  
It returns true if the value is true for at least one element.

## TYPES OF Error In SQL

- Syntax Errors :- These occur when SQL statements do not follow the correct syntax and structure of the language.
- Semantic Error :- These occur when the SQL statement is grammatically correct, But does not produce the desired result due to incorrect Logic.
- Constraint Violations :- These occur when the SQL violates one or more constraints on the database.
- Datatype Errors :- These occurs when data is inserted in a way that does not match the expected data type.  
For Example :- Insert a String into a numeric field.



- Transaction Error :- These occur when a transaction fails due to problems with locking.

# SQL JOINS

## SQL JOINS :-


These statements allows us to access information from two or more tables at once. They also keep our database normalized.

## TYPES OF JOINS :-

- INNER JOIN
- LEFT JOIN
- RIGHT JOIN
- FULL JOIN

ATUL KUMAR (LinkedIn / Twitter)  
NOTES GALLERY / CODING BUGS (Telegram)

INNER JOIN :- It returns dataset that have matching values in both tables.

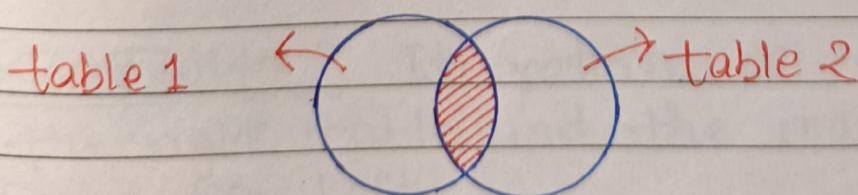


```

SELECT Column_name
FROM table1
INNER JOIN table2
ON table1.Column_name = table2.Column_name;

```

## LEFT JOIN

LEFT JOIN :- It returns all records from the left table and matched records from the right.

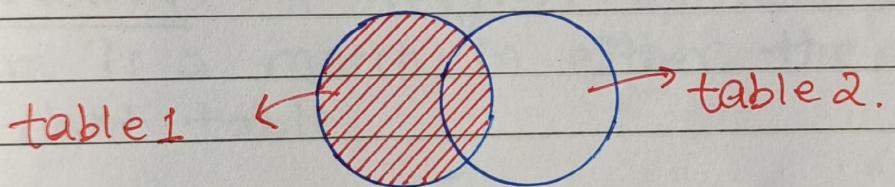

```


SELECT Column_name
FROM table1
LEFT JOIN table2
ON table1.Column_name = table2.Column_name.

```

## RIGHT JOIN

RIGHT JOIN :- It returns all records from the right table and the match records from the left.



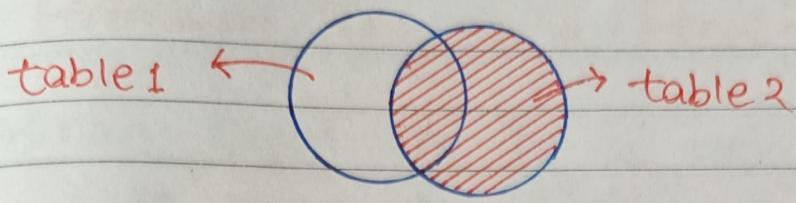


```

SELECT Column_name
FROM table 1
RIGHT JOIN table 2
ON table.Column_name=table 2.Column_name;

```

## FULL JOIN

FULL JOIN :- It returns all records when there is a match in either the left table or right table.

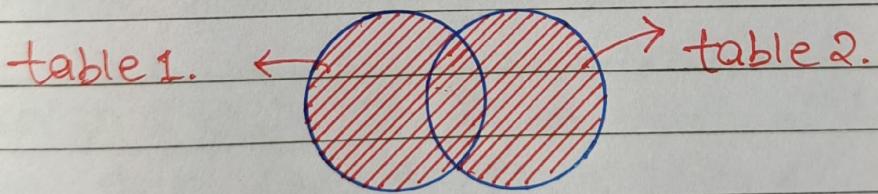

```

SELECT Column_name
FROM table 1
FULL OUTER JOIN table 2
ON table1.Column_name=table2.Column_name
WHERE Condition

```

ATUL KUMAR (LinkedIn/Twitter)  
NOTES GALLERY/CODING BUGS (Telegram)



## \* Primary Key and Foreign Key :-

- Primary Key :- It is a unique value that is used to identify a row in a table.  
 If you are thinking about unique constant, then you must to know the difference  
 \* Unique Constant can store null value also  
 Primary Key cannot store null value.

Syntax :-

```
Create table tablename (
  Column1 datatype,
  Column2 datatype,
  -- - - - -
  Primary Key ( column name )
);
```

→ A table can contain only one Primary Key.


→ Foreign Key :- It is a key which is used to link two table together.

Foreign Key can have multiple null value.

Syntax :-


```
Create table tablename (
  Column1 datatype,
  Column2 datatype,
  -- - - - -
);
```

Foreign Key [ Column1, --- ]  
 References [ Primary Key table name ]  
 );



→ Let's Take Example :-

	Roll No.	Name	Address
	1	Atul	Delhi
	2	Abhi	Mumbai
	3	Zayn	Delhi



Primary Key .

Name and address are not unique.

Here Roll No is unique.

So we discussed before , Primary Key is unique and not null value .

Result table .

Math	Science	English
10%	80%	70%
90%	60%	20%
70%	50%	21%



Math	Science	English
107.	807.	707.
907.	607.	207.
707.	507.	217.

→ You want to check Roll no. 3 marks in Maths, Foreign key come into picture student table + Result table.

We have to add Primary key in Result table which act as Foreign Key.

ATUL KUMAR (LinkedIn/Twitter)  
NOTES GALLERY | LEARNING BUGS | TELEGRAM

### Foreign Key

Maths	Science	English	Roll No.
107.	807.	707.	1
907.	607.	207.	2
707.	307.	217.	3



# COMMIT AND ROLLBACK

commit and Rollback are transaction statements.

## Commit :-

It is used to storing changes Permanantly performed by a transaction.

## Commit Syntax :-

COMMIT;

## Rollback :-

It is used for reverting changes performed by a transaction.

## Rollback Syntax :-

Rollback;

ATUL KUMAR (LinkedIn/Twitter)  
NOTES GALLERY / CODING BUGS (Telegram)

