Weight each short-read signal gets in the combined calibration curves (average share per repeat)

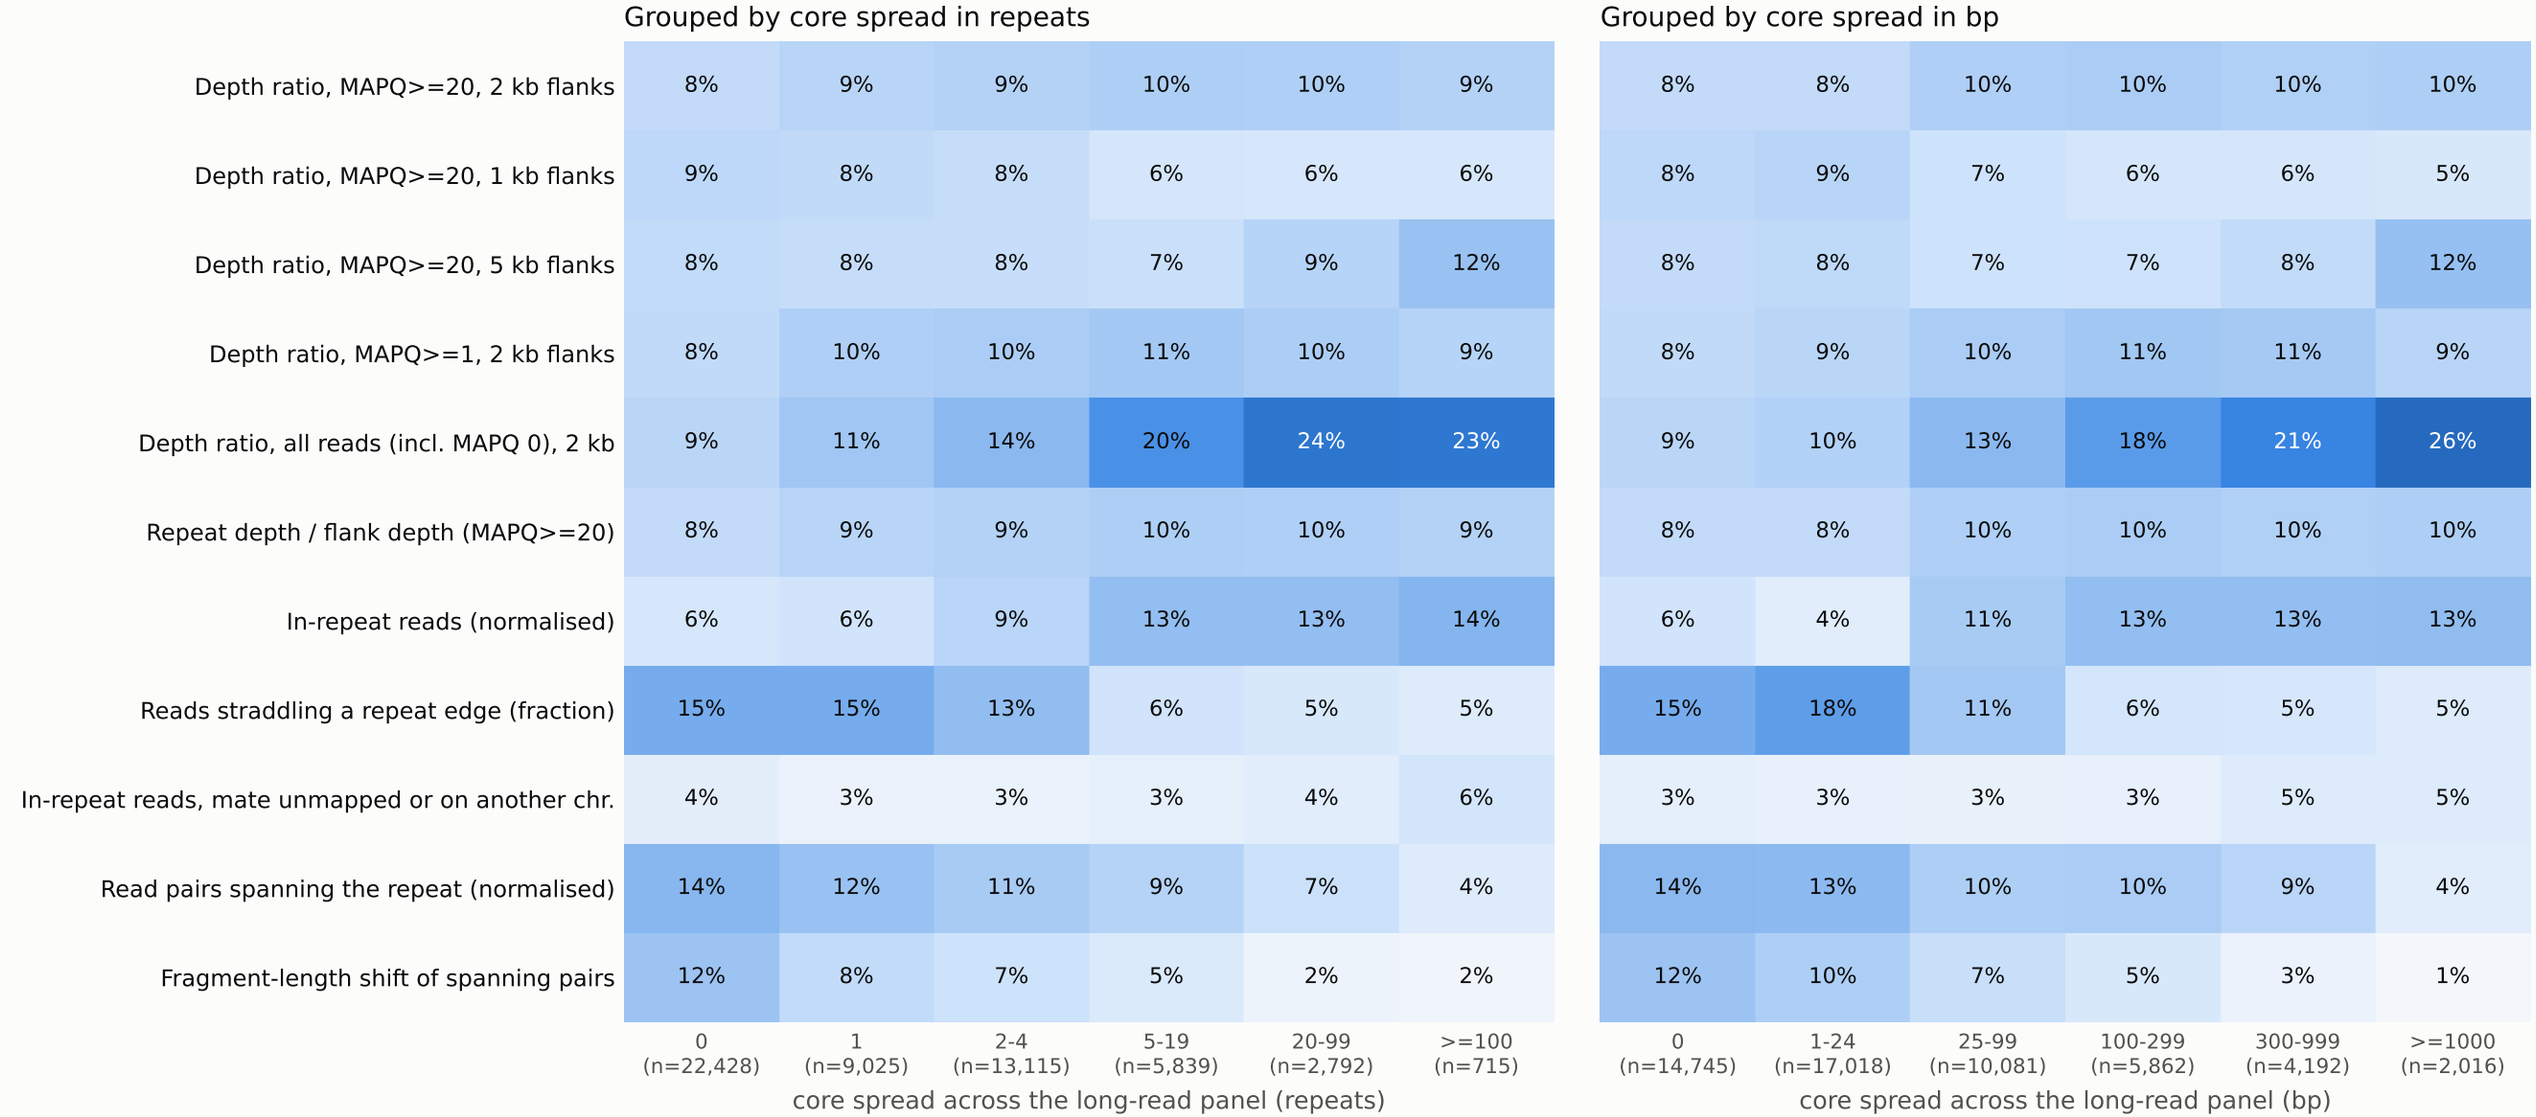

Shipped models: per repeat, the 11 signals are combined by ridge regression (standardised) before the monotone curve is fitted. Share = |weight| / sum of |weights|; columns sum to 100%.
Repeats where all training people have the same length are excluded. 'Repeat depth / flank depth (MAPQ>=20)' equals the 2 kb MAPQ>=20 depth ratio, so the two share their weight.