

Deploy static website

Created bucket:

Buckets (2) [Info](#)

Buckets are containers for data stored in S3. [Learn more](#)

Search: my 1 match

	Name	AWS Region	Access	Creation date
<input type="radio"/>	my-881131779895-static-website	US East (N. Virginia) us-east-1	<u>Objects can be public</u>	August 15, 2021, 20:00:05 (UTC+02:00)

Website files:

Amazon S3 > my-881131779895-static-website

my-881131779895-static-website [Info](#)

[Objects](#) | [Properties](#) | [Permissions](#) | [Metrics](#) | [Management](#) | [Access Points](#)

Objects (4)

Objects are the fundamental entities stored in Amazon S3. You can use [Amazon S3 inventory](#) to get a list of all objects in your bucket. For others to access your objects, you'll need to explicitly grant them permissions. [Learn more](#)


Copy S3 URI Copy URL Download Open Delete Actions Create folder Upload

Find objects by prefix

	Name	Type	Last modified	Size	Storage class
<input type="checkbox"/>	css/	Folder	-	-	-
<input type="checkbox"/>	img/	Folder	-	-	-
<input type="checkbox"/>	index.html	html	August 15, 2021, 20:05:43 (UTC+02:00)	6.2 KB	Standard
<input type="checkbox"/>	vendor/	Folder	-	-	-

Added bucket policy :

Bucket policy


The bucket policy, written in JSON, provides access to the objects stored in the bucket. Bucket policies don't apply to objects owned by other accounts. [Learn more](#) 

[Edit](#)

```
{
  "Version": "2012-10-17",
  "Statement": [
    {
      "Sid": "AddPerm",
      "Effect": "Allow",
      "Principal": "*",
      "Action": "s3:GetObject",
      "Resource": "arn:aws:s3:::my-881131779895-static-website/*"
    }
  ]
}
```

Configure S3 bucket



Static website hosting



Use this bucket to host a website or redirect requests. [Learn more](#) 

Static website hosting

- ☐ Disable
- ☒ Enable

Hosting type

- ☒ Host a static website
Use the bucket endpoint as the web address. [Learn more](#) 
- ☐ Redirect requests for an object
Redirect requests to another bucket or domain. [Learn more](#) 

 For your customers to access content at the website endpoint, you must make all your content publicly readable. To do so, you can edit the S3 Block Public Access settings for the bucket. For more information, see [Using Amazon S3 Block Public Access](#) 

Index document

Specify the home or default page of the website.

Error document - optional

This is returned when an error occurs.

Redirection rules - optional

Redirection rules, written in JSON, automatically redirect webpage requests for specific content. [Learn more](#) 

Website endpoint:

Bucket website endpoint

When you configure your bucket as a static website, the website is available at the AWS Region-specific website endpoint of the bucket. [Learn more](#) 

 <http://my-881131779895-static-website.s3-website-us-east-1.amazonaws.com> 

Cloud front:

Origin

Origin domain

Choose an AWS origin, or enter your origin's domain name.

 my-881131779895-static-website.s3.us-east-1.amazonaws.com 

Origin path - optional [Info](#)

Enter a URL path to append to the origin domain name for origin requests.

Enter the origin path

Name

Enter a name for this origin.

my-881131779895-static-website.s3.us-east-1.amazonaws.com

S3 bucket access [Info](#)

Use a CloudFront origin access identity (OAI) to access the S3 bucket.

- ☐ Don't use OAI (bucket must allow public access)
- ☒ Yes use OAI (bucket can restrict access to only CloudFront)

Origin access identity

Select an existing origin access identity (recommended) or create a new identity.

access-identity-my-881131779895-static-website.s3.us-east-1.amazonaws.com ▼

Create new OAI

Bucket policy

Update the S3 bucket policy to allow read access to the OAI.

- ☐ No, I will update the bucket policy
- ☒ Yes, update the bucket policy

Viewer protocol policy


- ☐ HTTP and HTTPS
☒ Redirect HTTP to HTTPS
☐ HTTPS only

Default root object - *optional*

The object (file name) to return when a viewer requests the root URL (/) instead of a specific object.

Distributions (1) Info							<input type="button" value="Refresh"/> <input type="button" value="Enable"/> <input type="button" value="Disable"/> <input type="button" value="Delete"/> <input type="button" value="Create distribution"/>	
<input type="text" value="Search all distributions"/>							< 1 > Settings	
<input type="checkbox"/>	ID	Description	Domain name	Alternate domain ...	Origins	Status		
<input type="checkbox"/>	E1NBDYM98HFKRS	-	d2dgcjks5fw5f.cloudfront.net	-	my-881131779895-static-website.s3.us-east-1.amazonaws.com	Enabled		

Website:

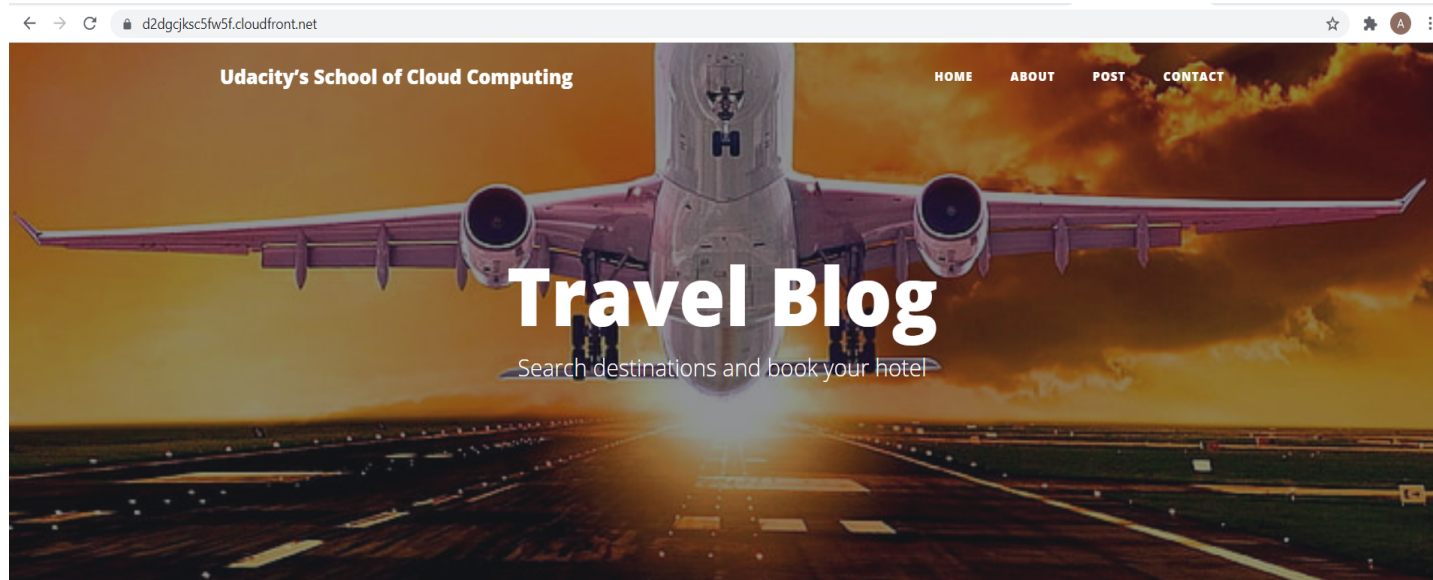

The Most Popular Destinations for Solo Travelers

Here are the spots where you're most likely to meet other