llm-openrouter-decisions

Ask a closed question. Get a number back.

30 decision models from OpenRouter, in your terminal, through Simon Willison’s LLM.

yes/no · choice · score · box

github.com/aborruso/llm-openrouter-decisions

FIRST, A THANK YOU

Thank you, Simon Willison.

For the work he has been doing for years to explain AI to everyone, in the open, and for LLM, a tool that lets anyone use AI models in a smart, convenient and elegant way.

This plugin only exists because LLM does.

Request validation, response handling and tests derived from llm-typesafe by Simon Willison (Apache-2.0). Skeleton from his llm-plugin cookiecutter template.

They don’t write text. They answer with numbers.

You send some content, the *state*, plus a closed question.

noul — Probability that a statement is true

```
{"noul": 0.99}
```

choice — A category, with a probability for each option

```
{"choice": "billing", ...}
```

score — A position on an ordered scale

```
{"score": 0.94, "legend": ...}
```

box — Where something is in an image

```
{"box": {"top": 0.06, ...}}
```

Fast and very cheap: made for classifying, filtering and triaging **many items** from the command line.

30 models.
13 makers.
One key.

TypeSafe Jev

Perplexity Decider
Liquid d1
Upstage Solar Decide
Kev (open weight)

OpenAI GPT-6 Luna Decisions
Cloudflare Clef
Inception Mercury Decide
Microsoft Decision-1
and more

```
llm models | grep openrouter-decisions
```

Compare them on your own data changing nothing but `-m`. Accuracy, speed, price and probabilities differ: test more than one before picking.

github.com/aborruso/llm-openrouter-decisions

Content in. Question with -s.

```
llm install llm-openrouter-decisions
llm keys set openrouter
llm aliases set jev14 \
  openrouter-decisions/typesafe/jev-1.14
```

```
llm -m jev14 'Please refund my last payment.' \
  -s 'Does this message ask for a refund?'

{"type": "noul", "noul": 0.99}
```

Categories with `-o answer_type choice`, several named questions in one request with `-o questions`, JSON input, images with `-a`.

48 decisions, $0.00033.

16 residents' reports to a city, 3 questions each, one CSV row at a time: which department, is it urgent, does it hold personal data.


REPORT	DEPT	CONF	URGENT
Huge pothole outside number 12	public works	1.00	0.95
A tree is about to fall	public works	1.00	0.94
Traffic light outside the hospital	public works	1.00	0.89
Strong smell of gas in the street	public works	0.47	0.88
Recycling bins full for days	environment	0.99	0.56

The report with a social security number: personal data 0.99, every other row 0.04 or less.

The gas leak is urgent, but no category fits a utility: confidence **0.47**. Sorting by confidence finds the rows a person should look at.

github.com/aborruso/llm-openrouter-decisions

Where is the legend?

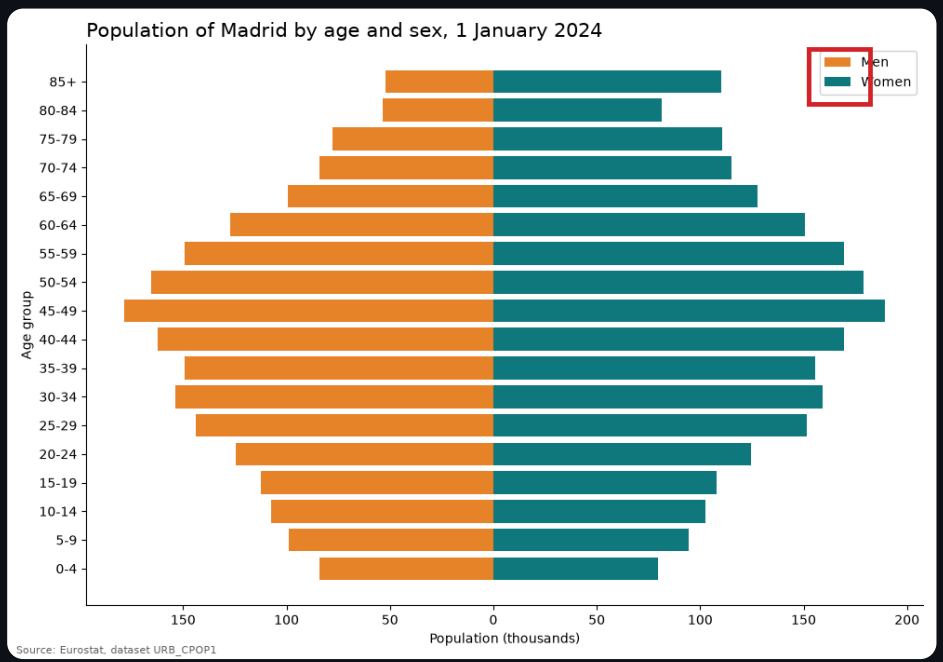


```
llm -m jev14 -a chart.png \
  -s 'the legend of the chart' \
  -o answer_type box ''

{"box": {"top": 0.06, "bottom": 0.15,
  "left": 0.86, "right": 0.93}, "confidence": 0.69}
```

The box finds the legend but covers only its left half.
Boxes are approximate: pair them with a yes/no question.

github.com/aborruso/llm-openrouter-decisions

Jev introduces a new shape of LLM · Simon Willison
What decision models are, and why evals and bias checks matter even more than with chat models.

Can Jev Parse CSV? · Remy Wang
Repairing broken CSV files with one yes/no question per comma: 12,044 decisions for 8 cents.

Can You Trust Jev's Confidence? · Ryan Porter
Confidence ranks right and wrong answers well but overstates them by 7 to 15 points.

TRY IT

One install, one OpenRouter key.

```
llm install llm-openrouter-decisions
```

github.com/aborruso/llm-openrouter-decisions

pypi.org/project/llm-openrouter-decisions