

Doom Emacs Configuration

Emacs configuration for work and life!

Abdelhak Bougouffa*

August 28, 2022

Contents

1	This repository	5
1.1	How to install	6
1.2	Emacs stuff	6
2	Intro	6
2.1	This file	6
3	Doom configuration files	7
3.1	Pseudo early-init	7
3.1.1	Useful functions	7
3.1.2	Fixes	8
3.1.3	Check for external tools	9
3.2	Doom modules (<code>init.el</code>)	9
3.2.1	File skeleton	9
3.2.2	Input (<code>:input</code>)	10
3.2.3	General (<code>:config</code>)	10
3.2.4	Completion (<code>:completion</code>)	10
3.2.5	User interface (<code>:ui</code>)	10
3.2.6	Editor (<code>:editor</code>)	11
3.2.7	Emacs builtin stuff (<code>:emacs</code>)	11
3.2.8	Terminals (<code>:term</code>)	11
3.2.9	Checkers (<code>:checkers</code>)	11
3.2.10	Tools (<code>:tools</code>)	12
3.2.11	Operating system (<code>:os</code>)	12
3.2.12	Language support (<code>:lang</code>)	12
3.2.13	Email (<code>:email</code>)	13
3.2.14	Apps (<code>:app</code>)	13
3.3	Additional packages (<code>packages.el</code>)	13
4	General Emacs settings	13
4.1	User information	13
4.2	Common variables	13
4.3	Secrets	13
4.4	Better defaults	14
4.4.1	File deletion	14
4.4.2	Window	14
4.4.3	Messages buffer	14
4.4.4	Undo and auto-save	15
4.4.5	Editing	16

*abougouffa@fedoraproject.org

4.4.6	Emacs sources	16
4.4.7	Frame	16
4.4.8	Browsers	16
5	Emacs daemon	16
5.1	Initialization	16
5.2	Tweaks	17
5.2.1	Save recent files	17
6	Package configuration	17
6.1	User interface	17
6.1.1	Font	17
6.1.2	Theme	18
6.1.3	Modeline	20
6.1.4	Set transparency	20
6.1.5	Dashboard	21
6.1.6	Which key	21
6.1.7	Window title	21
6.1.8	SVG tag and <code>svg-lib</code>	22
6.1.9	Focus	22
6.1.10	Scrolling	22
6.1.11	All the icons	23
6.1.12	Tabs	23
6.2	Editing	23
6.2.1	Scratch buffer	23
6.2.2	Mouse buttons	23
6.2.3	Very large files	23
6.2.4	Evil	24
6.2.5	Aggressive indent	24
6.2.6	YASnippet	24
6.3	Literate configuration	24
6.3.1	Allow babel execution in <code>doom</code> CLI actions	24
6.4	Completion & IDE	25
6.4.1	Company	25
6.4.2	Treemacs	25
6.4.3	Projectile	27
6.4.4	Tramp	27
6.4.5	Eros-eval	27
6.4.6	<code>dir-locals.el</code>	27
6.4.7	Language Server Protocol	28
6.4.8	Cppcheck	30
6.4.9	Project CMake	31
6.4.10	Clang-format	31
6.4.11	Auto-include C++ headers	31
6.4.12	Emacs Refactor	31
6.4.13	Lorem ipsum	31
6.5	Symbols	32
6.5.1	Emojify	32
6.5.2	Ligatures	33
6.6	Checkers (spell & grammar)	33
6.6.1	Spell-Fu	33
6.6.2	Guess language	34
6.6.3	Grammarly	34
6.6.4	Grammalecte	35
6.6.5	LanguageTool	36
6.6.6	Go Translate (Google, Bing and DeepL)	39

6.7	System tools	40
6.7.1	Disk usage	40
6.7.2	Chezmoi	40
6.7.3	Aweshell	41
6.7.4	Lemon	41
6.7.5	eCryptfs	42
6.8	Features	43
6.8.1	Weather	43
6.8.2	OpenStreetMap	43
6.8.3	Islamic prayer times	43
6.8.4	Info colors	44
6.8.5	Zotero Zotxt	44
6.8.6	CRDT	44
6.8.7	The Silver Searcher	44
6.8.8	Page break lines	45
6.8.9	Emacs Application Framework	45
6.8.10	Bitwarden	48
6.8.11	PDF tools	48
6.8.12	LTDR	49
6.8.13	FZF	49
6.8.14	Binary files	50
6.8.15	Objdump mode	50
6.9	Fun	51
6.9.1	Speed Type	51
6.9.2	2048 Game	51
6.9.3	Snow	51
6.9.4	xkcd	52
7	Applications	52
7.1	Calendar	52
7.2	e-Books (nov)	52
7.3	News feed (elfeed)	53
7.4	VPN configuration	53
7.4.1	NetExtender wrapper	53
7.4.2	Emacs + NetExtender	54
7.5	Email (mu4e)	54
7.5.1	IMAP (mbsync)	54
7.5.2	SMTP (msmtp)	57
7.5.3	Mail client and indexer (mu and mu4e)	58
7.6	IRC	61
7.7	Multimedia	61
7.7.1	MPD and MPC	61
7.7.2	EMMS	62
7.7.3	EMPV	64
7.7.4	Keybindings	65
7.7.5	Cycle song information in mode line	65
7.8	Maxima	66
7.8.1	Maxima	66
7.8.2	IMaxima	67
7.9	FriCAS	67

8	Programming	67
8.1	File templates	67
8.2	CSV rainbow	67
8.3	Vim	68
8.4	ESS	68
8.5	Python IDE	68
8.6	GNU Octave	68
8.7	ROS	69
8.7.1	Extensions	69
8.7.2	ROS bags	69
8.7.3	ros.el	70
8.8	Scheme	70
8.9	Embedded systems	70
8.9.1	Embed.el	70
8.9.2	Arduino	71
8.9.3	Bitbake (Yocto)	71
8.10	Debugging	71
8.10.1	DAP	71
8.10.2	RealGUD	72
8.10.3	GDB	74
8.10.4	WIP launch.json support for GUD and RealGUD	76
8.10.5	Valgrind	80
8.11	Git & VC	80
8.11.1	Magit	80
8.11.2	Repo	81
8.11.3	Blamer	81
8.12	Assembly	82
8.13	Disaster	82
8.14	Devdocs	83
8.15	Systemd	83
8.16	PKGBUILD	83
8.17	Franca IDL	83
8.18	L ^A T _E X	84
8.19	Flycheck + Projectile	84
8.20	Graphviz	84
8.21	Modula-II	85
8.22	Mermaid	85
8.23	The V Programming Language	85
8.24	Inspector	85
9	Office	86
9.1	Org additional packages	86
9.2	Org mode	86
9.2.1	Intro	86
9.2.2	Behavior	86
9.2.3	Custom links	98
9.2.4	Visuals	99
9.2.5	Bibliography	105
9.2.6	Exporting	107
9.3	Text editing	110
9.3.1	Plain text	110
9.3.2	Academic phrases	111
9.3.3	Quarto	111
9.3.4	French apostrophes	111
9.3.5	Yanking multi-lines paragraphs	111

10 System configuration	112
10.1 Mime types	112
10.1.1 Org mode files	112
10.1.2 Registering <code>org-protocol://</code>	112
10.1.3 Configuring Chrome/Brave	112
10.2 Git	113
10.2.1 Git diffs	113
10.2.2 Apache Tika App wrapper	115
10.3 Emacs' Systemd daemon	117
10.4 Emacs client	117
10.4.1 Desktop integration	117
10.4.2 Command-line wrapper	117
10.5 LanguageTool server	119
10.6 AppImage	120
10.7 Oh-my-Zsh	120
10.7.1 Path	120
10.7.2 Themes and customization:	120
10.7.3 Behavior	121
10.7.4 Plugins	121
10.7.5 Bootstrap Oh-my-Zsh	122
10.7.6 Aliases	122
10.8 Zsh user configuration	122
10.8.1 <code>pbcopy</code> and <code>pbpaste</code>	122
10.8.2 <code>netpaste</code>	123
10.8.3 Sudo GUI!	123
10.8.4 Neovim	123
10.8.5 ESP-IDF	123
10.8.6 CLI <code>wttr.in</code> client	123
10.8.7 Minicom	124
10.8.8 Rust	124
10.8.9 Clang-format	124
10.8.10 CMake	124
10.8.11 Node	124
10.8.12 <code>tmux</code>	124
10.8.13 Other stuff	125
10.9 Rust format	125
10.10eCryptfs	126
10.10.1 Unlock and mount script	126
10.10.2 Desktop integration	127
10.11GDB	127
10.11.1 Early init	127
10.11.2 Init	128
10.12GnuPG	128
10.13OCR This	129
10.14Packages	129
10.15KDE Plasma	129

1 This repository

This repository (abougouffa/dotfiles) contains my configuration files for **Zsh**, **Emacs**, **Vim**, **Alacritty** and other Linux related stuff.

If you want to reuse some of these configurations, you will need to modify some directories and add some user specific information (usernames, passwords...)

This is the main configuration file `.doom.d/config.org`, (available also as a PDF file), it contains the literal configuration for Doom Emacs, and I use it to generate some other user configuration files (define aliases, environment variables, user tools, Git configuration...).

1.1 How to install

Since commit 55c92810, I'm using **chezmoi** to manage my Dotfiles.

Now the Dotfiles can be installed using the following command; however, I don't recommend installing all of my dotfiles, try instead to adapt them or to copy some interesting chunks.

```
1 sudo pacman -S chezmoi
2 chezmoi init --apply abougouffa
```

1.2 Emacs stuff

To use my Doom Emacs configuration, you need first to install Doom Emacs to `~/.config/emacs` or `.emacs.d`:

```
1 git clone https://github.com/doomemacs/doomemacs.git ~/.config/emacs
2
3 ~/.config/emacs/bin/doom install
```

Until 12b3d20e, I was using Chemacs2 to manage multiple Emacs profiles. Since I'm using only Doom Emacs and Doom recently introduced a new feature to bootstrap other Emacs configs, so I switched to a plain Doom Emacs config.

2 Intro

I've been using Linux exclusively since 2010, **GNU Emacs** was always installed on my machine, but I didn't discover the **real** Emacs until 2020, in the beginning, I started my Vanilla Emacs configuration from scratch, but after a while, it becomes a mess. As a new Emacs user, I didn't understand the in the beginning how to optimize my configuration and how to do things correctly. I discovered then Spacemacs, which made things much easier, but it was a little slow, and just after, I found the awesome Doom Emacs, and since, I didn't quit my Emacs screen!

In the beginning, I was basically copying chunks of Emacs Lisp code from the internet, which quickly becomes a mess, specially because I was using a mixture of vanilla Emacs style configurations and Doom style ones.

Now I decided to rewrite a cleaner version of my configuration which will be more Doom friendly, and for that, I found an excellent example in *tecosaur's* emacs-config, so my current configuration is heavily inspired by *tecosaur's* one.

2.1 This file

This is my literate configuration file, I use it to generate Doom's config files (`$DOOMDIR/init.el`, `$DOOMDIR/packages.el` and `$DOOMDIR/config.el`), as well as some other shell scripts, app installers, app launchers... etc.

Make `config.el` run (slightly) faster with lexical binding (see this blog post for more info).

```
1 ;;; config.el -*- coding: utf-8-unix; lexical-binding: t; -*-
```

Add the shebang and the description to the `setup.sh` file, which will be used to set system settings and install some missing dependencies.

```
1 #!/bin/bash
2
3 # This is an automatically generated setup file, it installes some missing
4 # dependencies, configure system services, set system settings form better
```

```

5 # desktop integration... etc.
6 # Abdelhak BOUGOUFFA (c) 2022

```

Add an initial comment to the `~/.zshrc` file.

```

1 # -*- mode: sh; -*-
2
3 # This file is automatically generated from my Org literate configuration.
4 # Abdelhak BOUGOUFFA (c) 2022

```

3 Doom configuration files

3.1 Pseudo early-init

This file will be loaded before the content of Doom's private `init.el`, I add some special stuff which I want to load very early.

```

1 ;; pseudo-early-init.el -*- coding: utf-8-unix; lexical-binding: t; -*-
2

```

3.1.1 Useful functions

Here we define some useful functions, some of them are available via other packages like `cl-lib`, `dash.el` or `s.el`, but I don't like to load too much third party libraries, particularly in early stage, so let's define here.

```

1 ;; (+bool "someval") ;; ==> t
2 (defun +bool (val) (not (null val)))
3
4 ;; (+foldr (lambda (a b) (message "%d + %d" a b) (+ a b)) 0 '(1 2 3 4 5)) ;; ==> 15
5 ;; (5 + 0) -> (4 + 5) -> (3 + 9) -> (2 + 12) -> (1 + 14)
6 (defun +foldr (fun acc seq)
7   (if (null seq) acc
8       (funcall fun (car seq) (+foldr fun acc (cdr seq)))))
9
10 ;; (+foldl (lambda (a b) (message "%d + %d" a b) (+ a b)) 0 '(1 2 3 4 5)) ;; ==> 15
11 ;; (0 + 1) -> (1 + 2) -> (3 + 3) -> (6 + 4) -> (10 + 5)
12 (defun +foldl (fun acc seq)
13   (if (null seq) acc
14       (+foldl fun (funcall fun acc (car seq)) (cdr seq))))
15
16 ;; (+all '(83 88 t "txt")) ;; ==> t
17 (defun +all (seq)
18   (+foldr (lambda (r l) (and r l)) t seq))
19
20 ;; (+some '(nil nil "text" nil 2)) ;; ==> t
21 (defun +some (seq)
22   (+bool (+foldr (lambda (r l) (or r l)) nil seq)))
23
24 ;; (+filter 'stringp '("A" 2 "C" nil 3)) ;; ==> ("A" "C")
25 (defun +filter (fun seq)
26   (if (null seq) nil
27       (let ((head (car seq))
28             (tail (cdr seq)))
29         (if (funcall fun head)
30             (cons head (+filter fun tail))
31             (+filter fun tail)))))
32
33 ;; (+str-join ", " '("foo" "10" "bar")) ;; ==> "foo, 10, bar"
34 (defun +str-join (sep seq)
35   (+foldl (lambda (l r) (concat l sep r))
36           (car seq) (cdr seq)))

```

```

37
38 ;; (+str-split "foo, 10, bar" ", ") ;; ==> ("foo" "10" "bar")
39 (defun +str-split (str sep)
40   (let ((s (string-search sep str)))
41     (if s (cons (substring str 0 s)
42                 (+str-split (substring str (+ s (length sep))) sep))
43         (list str))))
44
45 ;; (+zip '(1 2 3 4) '(a b c d) '("A" "B" "C" "D")) ;; ==> ((1 a "A") (2 b "B") (3 c "C") (4 d "D"))
46 (defun +zip (&rest seqs)
47   (if (null (car seqs)) nil
48       (cons (mapcar #'car seqs)
49             (apply #' +zip (mapcar #'cdr seqs)))))
50
51 (defun +file-mime-type (file)
52   "Get MIME type for FILE based on magic codes provided by the 'file' command.
53 Return a symbol of the MIME type, ex: `text/x-lisp`, `text/plain`,
54 `application/x-object`, `application/octet-stream`, etc."
55   (let ((mime-type (shell-command-to-string (format "file --brief --mime-type %s" file))))
56     (intern (string-trim-right mime-type))))
57
58 (defun +str-replace (old new s)
59   "Replaces OLD with NEW in S."
60   (replace-regexp-in-string (regexp-quote old) new s t))
61
62 (defun +str-replace-all (replacements s)
63   "REPLACEMENTS is a list of cons-cells. Each `car` is replaced with `cdr` in S."
64   (replace-regexp-in-string (regexp-opt (mapcar 'car replacements))
65                             (lambda (it) (cdr (assoc-string it replacements)))
66                             s t))
67
68 (defun +systemd-running-p (service)
69   "Check if the systemd SERVICE is running."
70   (zerop (call-process "systemctl" nil nil nil "--user" "is-active" "--quiet" service ".service"))))
71
72 (defun +systemd-start (service &optional pre-fn post-fn)
73   "Start systemd SERVICE"
74   (interactive)
75   (when pre-fn (funcall pre-fn))
76   (if (zerop (call-process "systemctl" nil nil nil "--user" "start" service ".service"))
77       (progn
78         (when post-fn (funcall post-fn))
79         (message "[systemd]: Service %s.service started successfully.))
80       (message "[systemd]: Failed to start %s.service." service)))
81
82 (defun +systemd-stop (service &optional pre-fn post-fn)
83   "Stops the systemd SERVICE."
84   (interactive)
85   (when pre-fn (funcall pre-fn))
86   (call-process "systemctl" nil nil nil "--user" "stop" service ".service")
87   (when post-fn (funcall post-fn))
88   (message "[systemd]: Stopped service %s." service))

```

3.1.2 Fixes

```

1  ;; Fixes to apply early
2
3  (when (daemonp)
4    ;; When starting Emacs in daemon mode,
5    ;; I need to have a valid passphrase in the gpg-agent.
6    (let ((try-again 3)
7          unlocked)
8      (while (not (or unlocked (zerop try-again)))
9        (setq unlocked (zerop (shell-command "gpg -q --no-tty --logger-file /dev/null --batch -d ~/.authinfo.gpg
↵ > /dev/null" nil nil))
10         try-again (1- try-again))
11      (unless unlocked

```



```

12      (message "GPG: failed to unlock, please try again (%d)" try-again)))
13      (unless unlocked
14        (kill-emacs 1))))

```

3.1.3 Check for external tools

Some added packages require external tools, I like to check for these tools and store the result in global constants.

```

1  (defconst EAF-DIR (expand-file-name "eaf/eaf-repo" doom-data-dir))
2  (defconst IS-LUCID (string-search "LUCID" system-configuration-features))
3
4  (defconst AG-P (executable-find "ag"))
5  (defconst EAF-P (and (not IS-LUCID) (file-directory-p EAF-DIR)))
6  (defconst MPD-P (+all (mapcar #'executable-find '("mpc" "mpd"))))
7  (defconst MPV-P (executable-find "mpv"))
8  (defconst REPO-P (executable-find "repo"))
9  (defconst FRICAS-P (and (executable-find "fricas") (file-directory-p "/usr/lib/fricas/emacs")))
10 (defconst MAXIMA-P (executable-find "maxima"))
11 (defconst QUARTO-P (executable-find "quarto"))
12 (defconst ROSBAG-P (executable-find "rosbag"))
13 (defconst ZOTERO-P (executable-find "zotero"))
14 (defconst CHEZMOI-P (executable-find "chezmoi"))
15 (defconst OBJDUMP-P (executable-find "objdump"))
16 (defconst ECRYPTFS-P (+all (mapcar #'executable-find '("ecryptfs-add-passphrase"
17   ↪ "/sbin/mount.ecryptfs_private"))))
18 (defconst BITWARDEN-P (executable-find "bw"))
19 (defconst YOUTUBE-DL-P (+some (mapcar #'executable-find '("yt-dlp" "youtube-dl"))))
20 (defconst NETEXTENDER-P (and (executable-find "netExtender") (+all (mapcar #'file-exists-p
21   ↪ '("~/local/bin/netextender" "~/ssh/sslvpn.gpg"))))
22 (defconst CLANG-FORMAT-P (executable-find "clang-format"))
23 (defconst LANGUAGE-TOOL-P (executable-find "language-tool"))

```

3.2 Doom modules (*init.el*)

Here is the literate configuration which generates the Doom's *init.el* file, this file contains all the enabled Doom modules with the appropriate flags.

This section defines the default source blocks arguments . All source blocks in this section inherits these headers, so they will not be tangled unless overwriting in the block's header.

3.2.1 File skeleton

This first section defines the template for the subsections, it uses the `no-web` syntax to include subsections specified as `<<sub-section-name>>`.

```

1  ;;; init.el -*- coding: utf-8-unix; lexical-binding: t; -*-
2
3  ;; This file controls what Doom modules are enabled and what order they load in.
4  ;; Press 'K' on a module to view its documentation, and 'gd' to browse its directory.
5
6  ;; I add some special stuff wich I want to load very early.
7  (load! "pseudo-early-init.el")
8
9  (doom!
10   :input
11   <<doom-input>>
12
13   :completion
14   <<doom-completion>>
15
16   :ui
17   <<doom-ui>>
18
19   :editor

```

```

20  <<doom-editor>>
21
22  :emacs
23  <<doom-emacs>>
24
25  :term
26  <<doom-term>>
27
28  :checkers
29  <<doom-checkers>>
30
31  :tools
32  <<doom-tools>>
33
34  :os
35  <<doom-os>>
36
37  :lang
38  <<doom-lang>>
39
40  :email
41  <<doom-email>>
42
43  :app
44  <<doom-app>>
45
46  :config
47  <<doom-config>>
48  )

```

3.2.2 Input (:input)

Enable bidirectional languages support (*bidi*).

```

1  bidi

```

3.2.3 General (:config)

Enable *literate* configuration (like this file!), and some defaults.

```

1  literate
2  (default +bindings +smartparens)

```

3.2.4 Completion (:completion)

I'm lazy, I like Emacs to complete my writings.

```

1  (vertico +icons)
2  (company +childframe)

```

3.2.5 User interface (:ui)

Enables some user interface features for better user experience, the beautiful *modeline*, the *treemacs* project tree, better version control integration with *vc-gutter*... and other useful stuff.

```

1  deft
2  doom
3  doom-dashboard
4  hl-todo

```

```

5  hydra
6  modeline
7  zen
8  tabs
9  ophints
10 nav-flash
11 (vc-gutter +diff-hl +pretty)
12 (window-select +numbers)
13 ;; (ligatures +extra)
14 (popup +all +defaults)
15 (emoji +ascii +unicode +github)
16 (treemacs +lsp)
17 workspaces

```

3.2.6 Editor (:editor)

Some editing modules, the most important feature is EVIL to enable Vim style editing in Emacs. I like also to edit with multiple cursors, enable `yasnipet` support, wrap long lines, auto format support.

```

1  (evil +everywhere)
2  file-templates
3  fold
4  format
5  multiple-cursors
6  parinfer
7  snippets
8  word-wrap

```

3.2.7 Emacs builtin stuff (:emacs)

Beautify Emacs builtin packages.

```

1  (dired +dirvish +icons)
2  (ibuffer +icons)
3  undo
4  vc

```

3.2.8 Terminals (:term)

Run commands in terminal from Emacs. I use mainly `vterm` on my local machine, however, I like to have `eshell`, `shell` and `term` installed to use them for remote file editing (via Tramp).

```

1  eshell
2  vterm
3  shell
4  term

```

3.2.9 Checkers (:checkers)

I like to check my documents for errors while I'm typing. The `grammar` module enables LanguageTool support.

```

1  (syntax +childframe)
2  (spell +aspell)
3  (grammar +lsp)

```

3.2.10 Tools (:tools)

I enable some useful tools which facilitate my work flow, I like to enable Docker support, EditorConfig is a good feature to have. I like to enable `lsp-mode` and `dap-mode` for coding and debugging by enabling the `lsp` and `debugger` modules with `+lsp` support (further customization for `lsp` and `dap` below). `pdf` adds support through `pdf-tools`, which are great for viewing PDF files inside Emacs, I also enable some extra tools, like `magit`, `lookup`, `tmux`... etc.

```

1  ein
2  pdf
3  rgb
4  gist
5  make
6  tmux
7  direnv
8  upload
9  biblio
10 tree-sitter
11 editorconfig
12 (lsp +peek)
13 (docker +lsp)
14 (magit +forge)
15 (debugger +lsp)
16 (eval +overlay)
17 (lookup +docsets +dictionary +offline)

```

3.2.11 Operating system (:os)

I enable `tty` for better support of terminal editing.

```

1  (tty +osc)

```

3.2.12 Language support (:lang)

Most of the projects I'm working on are mainly written in C/C++, Python, Rust and some Lisp stuff, I edit also a lot of configuration and data files in several formats (`csv`, `yaml`, `xml`, `json`, `shell` scripts...). I use Org-mode to manage all my papers and notes, so I need to enable as many features as I need, I do enable `plantuml` also to quickly plot UML models withing Org documents.

```

1  qt
2  data
3  plantuml
4  emacs-lisp
5  common-lisp
6  (ess +lsp)
7  (yaml +lsp)
8  (markdown +grip)
9  (csharp +dotnet)
10 (racket +lsp +xp)
11 (lua +lsp +fennel)
12 (web +tree-sitter)
13 (ocaml +tree-sitter)
14 (cc +lsp +tree-sitter)
15 (sh +lsp +tree-sitter)
16 (json +lsp +tree-sitter)
17 (rust +lsp +tree-sitter)
18 (julia +lsp +tree-sitter)
19 (latex +lsp +latexmk +fold)
20 (python +lsp +pyenv +pyright +tree-sitter)
21 (scheme +chez +mit +chicken +gauche +guile +chibi)
22 (org +dragndrop +gnuplot +jupyter +pandoc +noter +journal +hugo +present +pomodoro +roam2)

```

3.2.13 Email (`:email`)

I like to use `mu4e` to manage mail mailboxes. The `+org` flag adds `org-msg` support and `+gmail` adds better management of Gmail accounts.

```
1 (:if (executable-find "mu") (mu4e +org +gmail))
```

3.2.14 Apps (`:app`)

Emacs contains a ton of applications, some of them are supported by Doom, I like to use Emacs manage my calendar, chat on IRC, and receive news. I do use EMMS sometimes to play music without leaving Emacs, and I like to enable support for `emacs-everywhere`.

```
1 calendar
2 irc
3 emms
4 everywhere
5 rss
```

3.3 Additional packages (`packages.el`)

This section generates Doom's `packages.el`, with the associated configurations (`use-package!` blocks). This file shouldn't be byte compiled.

```
1 ;; -*- coding: utf-8-unix; no-byte-compile: t; -*-
```

4 General Emacs settings

4.1 User information

```
1 (setq user-full-name "Abdelhak Bougouffa"
2       user-mail-address "abougouffa@fedoraproject.org")
```

4.2 Common variables

```
1 (defvar +my/lang-mother-tongue "ar")
2 (defvar +my/lang-main "en")
3 (defvar +my/lang-secondary "fr")
4
5 (defvar +my/biblio-libraries-list (list (expand-file-name "~/Zotero/library.bib")))
6 (defvar +my/biblio-storage-list (list (expand-file-name "~/Zotero/storage/")))
7 (defvar +my/biblio-notes-path (expand-file-name "~/PhD/bibliography/notes/"))
8 (defvar +my/biblio-styles-path (expand-file-name "~/Zotero/styles/"))
```

4.3 Secrets

Set the path to my GPG encrypted secrets. I like to set the cache expiry to `nil` instead of the default 2 hours.

```

1 (setq auth-sources '("~/authinfo.gpg")
2   auth-source-do-cache t
3   auth-source-cache-expiry 86400 ; All day, default is 2h (7200)
4   password-cache t
5   password-cache-expiry 86400)
6
7 (after! epa
8   (setq-default epa-file-encrypt-to '("F808A020A3E1AC37"))))

```

4.4 Better defaults

4.4.1 File deletion

Delete files by moving them to trash.

```

1 (setq-default delete-by-moving-to-trash t
2   trash-directory nil) ;; Use freedesktop.org trashcan

```

4.4.2 Window

Take new window space from all other windows (not just current).

```

1 (setq-default window-combination-resize t)

```

Split defaults Split horizontally to right, vertically below the current window.

```

1 (setq evil-vsplits-window-right t
2   evil-split-window-below t)

```

Show list of buffers when splitting.

```

1 (defadvice! prompt-for-buffer (&rest _)
2   :after '(evil-window-split evil-window-vsplits)
3   (consult-buffer))

```

4.4.3 Messages buffer

Stick to buffer tail, useful with `*Messages*` buffer. Derived from this answer.

```

1 (defvar +messages--auto-tail-enabled nil)
2
3 (defun +messages--auto-tail-a (&rest arg)
4   "Make *Messages* buffer auto-scroll to the end after each message."
5   (let* ((buf-name (buffer-name (messages-buffer)))
6         ;; Create *Messages* buffer if it does not exist
7         (buf (get-buffer-create buf-name)))
8     ;; Activate this advice only if the point is _not_ in the *Messages* buffer
9     ;; to begin with. This condition is required; otherwise you will not be
10    ;; able to use `isearch' and other stuff within the *Messages* buffer as
11    ;; the point will keep moving to the end of buffer :P
12    (when (not (string= buf-name (buffer-name)))
13      ;; Go to the end of buffer in all *Messages* buffer windows that are
14      ;; *live* (`get-buffer-window-list' returns a list of only live windows).
15      (dolist (win (get-buffer-window-list buf-name nil :all-frames))
16        (with-selected-window win
17          (goto-char (point-max)))))
18    ;; Go to the end of the *Messages* buffer even if it is not in one of

```

```

19      ;; the live windows.
20      (with-current-buffer buf
21        (goto-char (point-max))))))
22
23 (defun +messages-auto-tail-toggle ()
24   "Auto tail the '*Messages*' buffer."
25   (interactive)
26   (if +messages--auto-tail-enabled
27       (progn
28         (advice-remove 'message '+messages--auto-tail-a)
29         (setq +messages--auto-tail-enabled nil)
30         (message "+messages-auto-tail: Disabled."))
31       (advice-add 'message :after '+messages--auto-tail-a)
32       (setq +messages--auto-tail-enabled t)
33       (message "+messages-auto-tail: Enabled.")))

```

4.4.4 Undo and auto-save

```

1 (package! super-save
2   :disable t)

```

Auto-save

```

1 (use-package! super-save
2   :ensure t
3   :config
4   (setq auto-save-default t ;; nil to switch off the built-in `auto-save-mode', maybe leave it t to have a
  ↪ backup!
5     super-save-exclude '(".gpg")
6     super-save-remote-files nil
7     super-save-auto-save-when-idle t)
8   (super-save-mode +1))

```

```

1 (setq auto-save-default t) ;; enable built-in `auto-save-mode'

```

Undo Tweak undo-fu and other stuff from Doom's `:emacs undo`.

```

1 ;; Increase undo history limits even more
2 (after! undo-fu
3   (setq undo-limit      100000000 ;; 1MB (default is 160kB, Doom's default is 400kB)
4         undo-strong-limit 100000000 ;; 100MB (default is 240kB, Doom's default is 3MB)
5         undo-outer-limit 1000000000) ;; 1GB (default is 24MB, Doom's default is 48MB)
6
7 (after! evil
8   (setq evil-want-fine-undo t)) ;; By default while in insert all changes are one big blob

```

```

1 (package! vundo
2   :recipe (:host github
3           :repo "casouri/vundo"))

```

Visual Undo (vundo)

```

1 (use-package! vundo
2   :defer t
3   :custom
4   (vundo-glyph-alist vundo-unicode-symbols)
5   (vundo-compact-display t)
6   (vundo-window-max-height 5))

```

4.4.5 Editing

```

1 ;; Stretch cursor to the glyph width
2 (setq-default x-stretch-cursor t)
3
4 ;; Enable relative line numbers
5 (setq display-line-numbers-type 'relative)
6
7 ;; Iterate through CamelCase words
8 (global-subword-mode 1)

```

4.4.6 Emacs sources

```

1 (setq source-directory
2       (expand-file-name "~/Softwares/src/emacs"))

```

4.4.7 Frame

Focus created frame The problem is, every time I launch an Emacs frame (from KDE), Emacs starts with no focus, I need each time to **Alt-TAB** to get Emacs under focus, and then start typing. I tried changing this behavior from Emacs by hooking **raise-frame** at startup, but it didn't work.

Got from this comment, not working on my Emacs version.

```

1 ;; NOTE: Not tangled, not working
2 (add-hook 'server-switch-hook #'raise-frame)

```

After some investigations, I found that this issue is probably KDE specific, the issue goes away by setting: **Window Management > Window Behavior > Focus > Focus stealing prevention** to *None* in the KDE Settings.

4.4.8 Browsers

```

1 (setq browse-url-chrome-program "brave")

```

5 Emacs daemon

5.1 Initialization

When the daemon is running, I almost always want to do a few particular things with it, so I may as well eat the load time at startup. We also want to keep **mu4e** running.

Lastly, while I'm not sure quite why it happens, but after a bit it seems that new Emacs client frames start on the ***scratch*** buffer instead of the dashboard. I prefer the dashboard, so let's ensure that's always switched to in new frames.


```

1 (defun +daemon-startup ()
2   ;; mu4e
3   (when (require 'mu4e nil t)
4     ;; Automatically start `mu4e' in background.
5     (when (load! "mu-lock.el" (expand-file-name "email/mu4e/autoload" doom-modules-dir) t)
6       (setq +mu4e-lock-greedy t
7             +mu4e-lock-relaxed t)
8       (when (+mu4e-lock-available t)
9         (mu4e--start)))
10
11    ;; Check each 5m, if `mu4e' is closed, start it in background.
12    (run-at-time
13      60 (* 60 5) ;; Check each 5 minutes
14      (lambda ()
15        (when (and (not (mu4e-running-p)) (+mu4e-lock-available))
16          (mu4e--start)
17          (message "Started `mu4e' in background."))))))
18
19    ;; RSS
20    (when (require 'elfeed nil t)
21      (run-at-time nil (* 2 60 60) #'elfeed-update))) ;; Check every 2h
22
23  (when (daemonp)
24    ;; Daemon startup
25    (add-hook 'emacs-startup-hook #' +daemon-startup)
26    ;; After creating a new frame (via emacsclient)
27    (add-hook!
28      'server-after-make-frame-hook
29      ;; Reload Doom's theme
30      #'doom/reload-theme
31      ;; Switch to Dashboard, unless we started in one of the special buffers
32      (unless (string-match-p "\\*draft\\|\\*stdin\\|emacs-everywhere" (buffer-name))
33        (switch-to-buffer +doom-dashboard-name))))

```

5.2 Tweaks

5.2.1 Save recent files

When editing files with Emacs client, the files does not get stored by `recentf`, making Emacs forgets about recently opened files. A quick fix is to hook the `recentf-save-list` command to the `delete-frame-functions` and `delete-terminal-functions` which gets executed each time a frame/terminal is deleted.

```

1 (when (daemonp)
2   (add-hook! '(delete-frame-functions delete-terminal-functions)
3     (let ((inhibit-message t))
4       (recentf-save-list)
5       (savehist-save))))

```

6 Package configuration

6.1 User interface

6.1.1 Font

Doom exposes five (optional) variables for controlling fonts in Doom. Here are the three important ones: `doom-font`, `doom-unicode-font` and `doom-variable-pitch-font`. The `doom-big-font` is used for `doom-big-font-mode`; use this for presentations or streaming.

They all accept either a `font-spec`, font string ("Input Mono-12"), or xlfed font string. You generally only need these two:

Some good fonts:

- Iosevka Fixed (THE FONT)

- Nerd fonts
 - FantasqueSansMono Nerd Font Mono
 - mononoki Nerd Font Mono
 - CaskaydiaCove Nerd Font Mono
- Cascadia Code
- Fantasque Sans Mono
- JuliaMono (good Unicode support)
- IBM Plex Mono
- JetBrains Mono
- Roboto Mono
- Source Code Pro
- Input Mono Narrow
- Fira Code

```

1 (setq doom-font (font-spec :family "Iosevka Fixed" :size 20)
2   doom-big-font (font-spec :family "Iosevka Fixed" :size 30 :weight 'light)
3   doom-variable-pitch-font (font-spec :family "Iosevka Fixed")
4   doom-unicode-font (font-spec :family "JuliaMono")
5   doom-serif-font (font-spec :family "Iosevka Fixed" :weight 'light))

```

6.1.2 Theme

Doom Set Doom's theme, some good choices:

- doom-one (Atom like)
- doom-vibrant (More vibrant version of doom-one)
- doom-one-light (Atom like)
- doom-dark+ (VS Code like)
- doom-xcode (XCode like)
- doom-material
- doom-material-dark
- doom-palenight
- doom-ayu-mirage
- doom-monokai-pro
- doom-tomorrow-day
- doom-tomorrow-night

```

1 (setq doom-theme 'doom-one-light)
2 (remove-hook 'window-setup-hook #'doom-init-theme-h)
3 (add-hook 'after-init-hook #'doom-init-theme-h 'append)

```

```
(package! modus-themes)
```

Modus

```
(use-package! modus-themes
:init
(setq modus-themes-hl-line '(accented intense)
modus-themes-subtle-line-numbers t
modus-themes-region '(bg-only no-extend) ;; accented
modus-themes-variable-pitch-ui nil
modus-themes-fringes 'subtle
modus-themes-diffs nil
modus-themes-italic-constructs t
modus-themes-bold-constructs t
modus-themes-intense-mouseovers t
modus-themes-paren-match '(bold intense)
modus-themes-syntax '(green-strings)
modus-themes-links '(neutral-underline background)
modus-themes-mode-line '(borderless padded)
modus-themes-tabs-accented nil ;; default
modus-themes-completions
'((matches . (extrabold intense accented))
(selection . (semibold accented intense))
(popup . (accented)))
modus-themes-headings '((1 . (rainbow 1.4))
(2 . (rainbow 1.3))
(3 . (rainbow 1.2))
(4 . (rainbow bold 1.1))
(t . (rainbow bold)))
modus-themes-org-blocks 'gray-background
modus-themes-org-agenda
'((header-block . (semibold 1.4))
(header-date . (workaholic bold-today 1.2))
(event . (accented italic varied))
(scheduled . rainbow)
(habit . traffic-light))
modus-themes-markup '(intense background)
modus-themes-mail-citations 'intense
modus-themes-lang-checkers '(background))

(defun +modus-themes-tweak-packages ()
(modus-themes-with-colors
(set-face-attribute 'cursor nil :background (modus-themes-color 'blue))
(set-face-attribute 'font-lock-type-face nil :foreground (modus-themes-color 'magenta-alt))
(custom-set-faces
;; Tweak `evil-mc-mode'
` (evil-mc-cursor-default-face ((,class :background ,magenta-intense-bg)))
;; Tweak `git-gutter-mode'
` (git-gutter-fr:added ((,class :foreground ,green-fringe-bg)))
` (git-gutter-fr:deleted ((,class :foreground ,red-fringe-bg)))
` (git-gutter-fr:modified ((,class :foreground ,yellow-fringe-bg)))
;; Tweak `doom-modeline'
` (doom-modeline-evil-normal-state ((,class :foreground ,green-alt-other)))
` (doom-modeline-evil-insert-state ((,class :foreground ,red-alt-other)))
` (doom-modeline-evil-visual-state ((,class :foreground ,magenta-alt)))
` (doom-modeline-evil-operator-state ((,class :foreground ,blue-alt)))
` (doom-modeline-evil-motion-state ((,class :foreground ,blue-alt-other)))
` (doom-modeline-evil-replace-state ((,class :foreground ,yellow-alt)))
;; Tweak `diff-hl-mode'
` (diff-hl-insert ((,class :foreground ,green-fringe-bg)))
` (diff-hl-delete ((,class :foreground ,red-fringe-bg)))
` (diff-hl-change ((,class :foreground ,yellow-fringe-bg)))
;; Tweak `solaire-mode'
` (solaire-default-face ((,class :inherit default :background ,bg-alt :foreground ,fg-dim)))
` (solaire-line-number-face ((,class :inherit solaire-default-face :foreground ,fg-unfocused)))
` (solaire-hl-line-face ((,class :background ,bg-active)))
` (solaire-org-hide-face ((,class :background ,bg-alt :foreground ,bg-alt)))
```

```

64 ;; Tweak `display-fill-column-indicator-mode'
65 `(fill-column-indicator ((,class :height 0.3 :background ,bg-inactive :foreground ,bg-inactive)))
66 ;; Tweak `mmm-mode'
67 `(mmm-cleanup-submode-face ((,class :background ,yellow-refine-bg)))
68 `(mmm-code-submode-face ((,class :background ,bg-active)))
69 `(mmm-comment-submode-face ((,class :background ,blue-refine-bg)))
70 `(mmm-declaration-submode-face ((,class :background ,cyan-refine-bg)))
71 `(mmm-default-submode-face ((,class :background ,bg-alt)))
72 `(mmm-init-submode-face ((,class :background ,magenta-refine-bg)))
73 `(mmm-output-submode-face ((,class :background ,red-refine-bg)))
74 `(mmm-special-submode-face ((,class :background ,green-refine-bg))))))
75
76 (add-hook 'modus-themes-after-load-theme-hook #'modus-themes-tweak-packages)
77
78 :config
79 (modus-themes-load-operandi)
80 (map! :leader
81      :prefix "t" ;; toggle
82      :desc "Toggle Modus theme" "m" #'modus-themes-toggle))

```

6.1.3 Modeline

Clock Display time and set the format to 24h.

```

1 (after! doom-modeline
2   (setq display-time-string-forms
3     '((propertyize (concat " " 24-hours ":" minutes))))
4   (display-time-mode 1)) ; Enable time in the mode-line

```

Battery Show battery level unless battery is not present or battery information is unknown.

```

1 (after! doom-modeline
2   (let ((battery-str (battery)))
3     (unless (or (equal "Battery status not available" battery-str)
4                 (string-match-p (regexp-quote "unknown") battery-str)
5                 (string-match-p (regexp-quote "N/A") battery-str))
6       (display-battery-mode 1))))

```

```

1 (after! doom-modeline
2   (setq doom-modeline-bar-width 4
3         doom-modeline-mu4e t
4         doom-modeline-minor-modes nil
5         doom-modeline-major-mode-icon t
6         doom-modeline-major-mode-color-icon t
7         doom-modeline-buffer-file-name-style 'truncate-upto-project))

```

Mode line customization

6.1.4 Set transparency

```

1 ;; NOTE: Not tangled
2 (set-frame-parameter (selected-frame) 'alpha '(85 100))
3 (add-to-list 'default-frame-alist '(alpha 97 100))

```

6.1.5 Dashboard

Custom splash image Change the logo to an image, a set of beautiful images can be found in `assets`.

File
<code>emacs-e.svg</code>
<code>gnu-emacs-white.svg</code>
<code>gnu-emacs-flat.svg</code>
<code>blackhole-lines.svg</code>
<code>doom-emacs-white.svg</code>
<code>doom-emacs-dark.svg</code>

```
1 (setq fancy-splash-image (expand-file-name "assets/emacs-e.png" doom-user-dir))
```

```
1 (remove-hook '+doom-dashboard-functions #'doom-dashboard-widget-shortmenu)
2 (remove-hook '+doom-dashboard-functions #'doom-dashboard-widget-footer)
3 (add-hook! '+doom-dashboard-mode-hook (hl-line-mode -1) (hide-mode-line-mode 1))
4 (setq-hook! '+doom-dashboard-mode-hook evil-normal-state-cursor (list nil))
```

Dashboard

6.1.6 Which key

Make `which-key` popup faster.

```
1 (setq which-key-idle-delay 0.5 ;; Default is 1.0
2     which-key-idle-secondary-delay 0.05) ;; Default is nil
```

I've stolen this chunk (like many others) from `tecosaur`'s config, it helps to replace the `evil-` prefix with a unicode symbol, making `which-key`'s candidate list less verbose.

```
1 (setq which-key-allow-multiple-replacements t)
2
3 (after! which-key
4   (pushnew! which-key-replacement-alist
5     '("(" . "\\`+?evil[-:~]?\\(?:a-\\)?\\(.*\\)") . (nil . "·\\1"))
6     '("(" . "\\`+?evilem--?motion-\\(.*\\)") . (nil . "·\\1")))))
```

6.1.7 Window title

I'd like to have just the buffer name, then if applicable the project folder.

```
1 (setq frame-title-format
2   '("("
3     (:eval
4       (if (s-contains-p org-roam-directory (or buffer-file-name ""))
5         (replace-regexp-in-string ".*[0-9]*-?" " "
6           (subst-char-in-string ?_ ?  buffer-file-name))
7         "%b"))
8   (:eval
9     (let* ((project-name (projectile-project-name))
10            (project-name (if (string= "-" project-name)
11                              (ignore-errors (file-name-base (string-trim-right (vc-root-dir))))
12                              project-name)))
13     (when project-name
14       (format (if (buffer-modified-p) " %s" " %s") project-name))))))
```

6.1.8 SVG tag and svg-lib

```
1 (package! svg-tag-mode)
```

```
1 (use-package! svg-tag-mode
2   :commands svg-tag-mode
3   :config
4   (setq svg-tag-tags
5         '(("~\\*.*.* \\(:[A-Za-z0-9]+\\)" .
6           ((lambda (tag)
7             (svg-tag-make
8              tag
9              :beg 1
10             :font-family "Roboto Mono"
11             :font-size 10
12             :height 0.8
13             :padding 0
14             :margin 0))))
15          ("\\(:[A-Za-z0-9]+:\\)"$" .
16            ((lambda (tag)
17              (svg-tag-make
18               tag
19               :beg 1
20               :end -1
21               :font-family "Roboto Mono"
22               :font-size 10
23               :height 0.8
24               :padding 0
25               :margin 0)))))))
```

```
1 (after! svg-lib
2   ;; Set `svg-lib' cache directory
3   (setq svg-lib-icons-dir (expand-file-name "svg-lib" doom-data-dir)))
```

6.1.9 Focus

Dim the font color of text in surrounding paragraphs, focus only on the current line.

```
1 (package! focus)
```

```
1 (use-package! focus
2   :commands focus-mode)
```

6.1.10 Scrolling

```
1 (package! good-scroll
2   :disable EMACS29+)
```

```
1 (use-package! good-scroll
2   :unless EMACS29+
3   :config (good-scroll-mode 1))
4
5 (when EMACS29+
6   (pixel-scroll-precision-mode 1))
7
```

```

8 (setq hscroll-step 1
9       hscroll-margin 0
10      scroll-step 1
11      scroll-margin 0
12      scroll-conservatively 101
13      scroll-up-aggressively 0.01
14      scroll-down-aggressively 0.01
15      scroll-preserve-screen-position 'always
16      auto-window-vscroll nil
17      fast-but-imprecise-scrolling nil)

```

6.1.11 All the icons

Set some custom icons for some file extensions, basically for `.m` files.

```

1 (after! all-the-icons
2   (setcdr (assoc "m" all-the-icons-extension-icon-alist)
3     (cdr (assoc "matlab" all-the-icons-extension-icon-alist))))

```

6.1.12 Tabs

```

1 (after! centaur-tabs
2   ;; For some reason, setting `centaur-tabs-set-bar' this to `right'
3   ;; instead of Doom's default `left', fixes this issue with Emacs daemon:
4   ;; https://github.com/doomemacs/doomemacs/issues/6647#issuecomment-1229365473
5   (setq centaur-tabs-set-bar 'right
6         centaur-tabs-gray-out-icons 'buffer
7         centaur-tabs-set-modified-marker t
8         centaur-tabs-close-button " "
9         centaur-tabs-modified-marker " "))

```

6.2 Editing

6.2.1 Scratch buffer

Tell the scratch buffer to start in `emacs-lisp-mode`.

```

1 (setq doom-scratch-initial-major-mode 'emacs-lisp-mode)

```

6.2.2 Mouse buttons

Map extra mouse buttons to jump between buffers

```

1 (map! :n [mouse-8] #'better-jumper-jump-backward
2       :n [mouse-9] #'better-jumper-jump-forward)
3
4 ;; Enable horizontal scrolling with the second mouse wheel or the touchpad
5 (setq mouse-wheel-tilt-scroll t
6       mouse-wheel-progressive-speed nil)

```

6.2.3 Very large files

The *very large files* mode loads large files in chunks, allowing one to open ridiculously large files.

```
1 (package! vlf)
```

To make VLF available without delaying startup, we'll just load it in quiet moments.

```
1 (use-package! vlf-setup
2   :defer-incrementally vlf-tune vlf-base vlf-write vlf-search vlf-occur vlf-follow vlf-ediff vlf)
```

6.2.4 Evil

```
1 (after! evil
2   ;; This fixes https://github.com/doomemacs/doomemacs/issues/6478
3   ;; Ref: https://github.com/emacs-evil/evil/issues/1630
4   (evil-select-search-module 'evil-search-module 'isearch)
5
6   (setq evil-kill-on-visual-paste nil)) ; Don't put overwritten text in the kill ring
```

6.2.5 Aggressive indent

```
1 (package! aggressive-indent)
```

```
1 (use-package! aggressive-indent
2   :commands (aggressive-indent-mode))
```

6.2.6 YASnippet

Nested snippets are good, enable that.

```
1 (setq yas-triggers-in-field t)
```

6.3 Literate configuration

6.3.1 Allow babel execution in doom CLI actions

This file generates all my Doom config files, it works nicely, but for it to work with `doom sync` et al. I need to make sure that Org doesn't try to confirm that I want to allow evaluation (I do!).

Thankfully Doom supports `$DOOMDIR/cli.el` file which is sourced every time a CLI command is run, so we can just enable evaluation by setting `org-confirm-babel-evaluate` to `nil` there.

While we're at it, we should silence `org-babel-execute-src-block` to avoid polluting the output.

```
1 ;; cli.el -*- lexical-binding: t; -*-
2 (setq org-confirm-babel-evaluate nil)
3
4 (defun doom-shut-up-a (orig-fn &rest args)
5   (quiet! (apply orig-fn args)))
6
7 (advice-add 'org-babel-execute-src-block :around #'doom-shut-up-a)
```


6.4 Completion & IDE

6.4.1 Company

I do not find company useful in Org files.

```
1 (setq company-global-modes
2   '(not erc-mode
3       circe-mode
4       message-mode
5       help-mode
6       gud-mode
7       vterm-mode
8       org-mode))
```

```
1 (after! company-box
2   (when (daemonp)
3     (defun +company-box--reload-icons-h ()
4       (setq company-box-icons-all-the-icons
5         (let ((all-the-icons-scale-factor 0.8))
6           `((Unknown . , (all-the-icons-faicon "code" :face 'all-the-icons-purple))
7             (Text . , (all-the-icons-material "text_fields" :face 'all-the-icons-green))
8             (Method . , (all-the-icons-faicon "cube" :face 'all-the-icons-red))
9             (Function . , (all-the-icons-faicon "cube" :face 'all-the-icons-red))
10            (Constructor . , (all-the-icons-faicon "cube" :face 'all-the-icons-red))
11            (Field . , (all-the-icons-faicon "tag" :face 'all-the-icons-red))
12            (Variable . , (all-the-icons-material "adjust" :face 'all-the-icons-blue))
13            (Class . , (all-the-icons-material "class" :face 'all-the-icons-red))
14            (Interface . , (all-the-icons-material "tune" :face 'all-the-icons-red))
15            (Module . , (all-the-icons-faicon "cubes" :face 'all-the-icons-red))
16            (Property . , (all-the-icons-faicon "wrench" :face 'all-the-icons-red))
17            (Unit . , (all-the-icons-material "straighten" :face 'all-the-icons-red))
18            (Value . , (all-the-icons-material "filter_1" :face 'all-the-icons-red))
19            (Enum . , (all-the-icons-material "plus_one" :face 'all-the-icons-red))
20            (Keyword . , (all-the-icons-material "filter_center_focus" :face 'all-the-icons-red-alt))
21            (Snippet . , (all-the-icons-faicon "expand" :face 'all-the-icons-red))
22            (Color . , (all-the-icons-material "colorize" :face 'all-the-icons-red))
23            (File . , (all-the-icons-material "insert_drive_file" :face 'all-the-icons-red))
24            (Reference . , (all-the-icons-material "collections_bookmark" :face 'all-the-icons-red))
25            (Folder . , (all-the-icons-material "folder" :face 'all-the-icons-red-alt))
26            (EnumMember . , (all-the-icons-material "people" :face 'all-the-icons-red))
27            (Constant . , (all-the-icons-material "pause_circle_filled" :face 'all-the-icons-red))
28            (Struct . , (all-the-icons-material "list" :face 'all-the-icons-red))
29            (Event . , (all-the-icons-material "event" :face 'all-the-icons-red))
30            (Operator . , (all-the-icons-material "control_point" :face 'all-the-icons-red))
31            (TypeParameter . , (all-the-icons-material "class" :face 'all-the-icons-red))
32            (Template . , (all-the-icons-material "settings_ethernet" :face 'all-the-icons-green))
33            (ElispFunction . , (all-the-icons-faicon "cube" :face 'all-the-icons-red))
34            (ElispVariable . , (all-the-icons-material "adjust" :face 'all-the-icons-blue))
35            (ElispFeature . , (all-the-icons-material "stars" :face 'all-the-icons-orange))
36            (ElispFace . , (all-the-icons-material "format_paint" :face 'all-the-icons-pink)))))
37
38 ;; Replace Doom defined icons with mine
39 (when (memq #' +company-box--load-all-the-icons server-after-make-frame-hook)
40   (remove-hook 'server-after-make-frame-hook #' +company-box--load-all-the-icons))
41 (add-hook 'server-after-make-frame-hook #' +company-box--reload-icons-h)))
```

Tweak company-box

6.4.2 Treemacs

```

1 (unpin! treemacs)
2 (unpin! lsp-treemacs)

1 (after! treemacs
2   (require 'dired)
3
4   ;; My custom stuff (from tecosaur's config)
5   (setq +treemacs-file-ignore-extensions
6     ';; LaTeX
7       "aux" "ptc" "fdb_latexmk" "fls" "synctex.gz" "toc"
8       ;; LaTeX - bibliography
9       "bbl"
10      ;; LaTeX - glossary
11      "glg" "glo" "gls" "glsdefs" "ist" "acn" "acr" "alg"
12      ;; LaTeX - pgfplots
13      "mw"
14      ;; LaTeX - pdfx
15      "pdfa.xmpi"
16      ;; Python
17      "pyc"))
18
19   (setq +treemacs-file-ignore-globs
20     ';; LaTeX
21       "*/_minted-*"
22       ;; AucTeX
23       "*/.auctex-auto"
24       "*/_region_.log"
25       "*/_region_.tex"
26       ;; Python
27       "*/__pycache__")
28
29   ;; Reload treemacs theme
30   (setq doom-themes-treemacs-enable-variable-pitch nil
31         doom-themes-treemacs-theme "doom-colors")
32   (doom-themes-treemacs-config)
33
34   (setq treemacs-show-hidden-files nil
35         treemacs-hide-dot-git-directory t
36         treemacs-width 30)
37
38   (defvar +treemacs-file-ignore-extensions '()
39     "File extension which `treemacs-ignore-filter' will ensure are ignored")
40
41   (defvar +treemacs-file-ignore-globs '()
42     "Globs which will be transformed to `+treemacs-file-ignore-regexps' which `treemacs-ignore-filter' will
43     ↪ ensure are ignored")
44
45   (defvar +treemacs-file-ignore-regexps '()
46     "RegExps to be tested to ignore files, generated from `+treemacs-file-ignore-globs'")
47
48   (defun +treemacs-file-ignore-generate-regexps ()
49     "Generate `+treemacs-file-ignore-regexps' from `+treemacs-file-ignore-globs'"
50     (setq +treemacs-file-ignore-regexps (mapcar 'dired-glob-regexp +treemacs-file-ignore-globs)))
51
52   (unless (equal +treemacs-file-ignore-globs '())
53     (+treemacs-file-ignore-generate-regexps))
54
55   (defun +treemacs-ignore-filter (file full-path)
56     "Ignore files specified by `+treemacs-file-ignore-extensions', and `+treemacs-file-ignore-regexps'"
57     (or (member (file-name-extension file) +treemacs-file-ignore-extensions)
58         (let ((ignore-file nil))
59           (dolist (regexp +treemacs-file-ignore-regexps ignore-file)
60             (setq ignore-file (or ignore-file (if (string-match-p regexp full-path) t nil))))))
61     (add-to-list 'treemacs-ignored-file-predicates #' +treemacs-ignore-filter))

```

6.4.3 Projectile

Doom Emacs defined a function `(doom-project-ignored-p path)` and uses it with `projectile-ignored-project-function`. So we will create a wrapper function which calls Doom's one, with an extra check.

```

1  ;; Run `M-x projectile-discover-projects-in-search-path' to reload paths from this variable
2  (setq projectile-project-search-path
3    '("~/PhD/papers"
4      "~/PhD/workspace"
5      "~/PhD/workspace-no"
6      "~/PhD/workspace-no/ez-wheel/swd-starter-kit-repo"
7      "~/Projects/foss" . 2))) ;; ("dir" . depth)
8
9  (setq projectile-ignored-projects
10    '("/tmp"
11      "~/"
12      "~/.cache"
13      "~/.doom.d"
14      "~/.emacs.d/.local/straight/repos/"))
15
16  (setq +projectile-ignored-roots
17    '("~/cache"
18      ;; No need for this one, as `doom-project-ignored-p' checks for files in `doom-local-dir'
19      "~/.emacs.d/.local/straight/"))
20
21  (defun +projectile-ignored-project-function (filepath)
22    "Return t if FILEPATH is within any of `+projectile-ignored-roots'"
23    (require 'cl-lib)
24    (or (doom-project-ignored-p filepath) ;; Used by default by doom with `projectile-ignored-project-function'
25        (cl-some (lambda (root) (file-in-directory-p (expand-file-name filepath) (expand-file-name root)))
26                  +projectile-ignored-roots)))
27
28  (setq projectile-ignored-project-function #' +projectile-ignored-project-function)

```

6.4.4 Tramp

Let's try to make tramp handle prompts better

```

1  (after! tramp
2    (setenv "SHELL" "/bin/bash")
3    (setq tramp-shell-prompt-pattern "\\(?:~\\|
4    \\)[^$%>\\n]*#?[]#$%> ] *\\(\\[[0-9;]*[a-zA-Z] *\\))*" ;; default +

```

6.4.5 Eros-eval

This makes the result of evals slightly prettier.

```

1  (setq eros-eval-result-prefix " ")

```

6.4.6 dir-locals.el

Reload `dir-locals.el` variables after modification. Taken from this answer.

```

1  (defun +dir-locals-reload-for-current-buffer ()
2    "reload dir locals for the current buffer"
3    (interactive)
4    (let ((enable-local-variables :all))
5      (hack-dir-local-variables-non-file-buffer)))
6
7  (defun +dir-locals-reload-for-all-buffers-in-this-directory ()
8    "For every buffer with the same `default-directory` as the

```

```

9  current buffer's, reload dir-locals."
10  (interactive)
11  (let ((dir default-directory))
12    (dolist (buffer (buffer-list))
13      (with-current-buffer buffer
14        (when (equal default-directory dir)
15          (+dir-locals-reload-for-current-buffer))))))
16
17  (defun +dir-locals-enable-autoreload ()
18    (when (and (buffer-file-name)
19              (equal dir-locals-file (file-name-nondirectory (buffer-file-name))))
20      (message "Dir-locals will be reloaded after saving.")
21      (add-hook 'after-save-hook '+dir-locals-reload-for-all-buffers-in-this-directory nil t)))
22
23  (add-hook! '(emacs-lisp-mode-hook lisp-data-mode-hook) #' +dir-locals-enable-autoreload)

```

6.4.7 Language Server Protocol

Eglot Eglot uses `project.el` to detect the project root. This is a workaround to make it work with `projectile`:

```

1  (after! eglot
2    ;; A hack to make it works with projectile
3    (defun projectile-project-find-function (dir)
4      (let* ((root (projectile-project-root dir)))
5        (and root (cons 'transient root))))
6
7    (with-eval-after-load 'project
8      (add-to-list 'project-find-functions 'projectile-project-find-function))
9
10   ;; Use clangd with some options
11   (set-eglot-client! 'c++-mode '("clangd" "-j=3" "--clang-tidy")))

```

LSP mode

Tweak UI LSP mode provides a set of configurable UI stuff. By default, Doom Emacs disables some UI components; however, I like to enable some less intrusive, more useful UI stuff.

```

1  (after! lsp-ui
2    (setq lsp-ui-sideline-enable t
3          lsp-ui-sideline-show-code-actions t
4          lsp-ui-sideline-show-diagnostics t
5          lsp-ui-sideline-show-hover nil
6          lsp-log-io nil
7          lsp-lens-enable t ; not working properly with ccis!
8          lsp-diagnostics-provider :auto
9          lsp-enable-symbol-highlighting t
10         lsp-headerline-breadcrumb-enable nil
11         lsp-headerline-breadcrumb-segments '(symbols)))

```

```

1  (after! lsp-clangd
2    (setq lsp-clients-clangd-args
3          '("-j=4"
4            "--background-index"
5            "--clang-tidy"
6            "--completion-style=detailed"
7            "--header-insertion=never"
8            "--header-insertion-decorators=0"))
9    (set-lsp-priority! 'clangd 1))

```

LSP mode with clangd

```

1 ;; NOTE: Not tangled, using the default ccls
2 (after! ccls
3   (setq ccls-initialization-options
4     '(:index (:comments 2
5              :trackDependency 1
6              :threads 4)
7       :completion (:detailedLabel t)))
8   (set-lsp-priority! 'ccls 2)) ; optional as ccls is the default in Doom

```

LSP mode with ccls

Enable lsp over tramp

1. Python

```

1 (after! tramp
2   (require 'lsp-mode)
3   ;; (require 'lsp-pyright)
4
5   (setq lsp-enable-snippet nil
6         lsp-log-io nil
7         ;; To bypass the "lsp--document-highlight fails if
8         ;; textDocument/documentHighlight is not supported" error
9         lsp-enable-symbol-highlighting nil)
10
11   (lsp-register-client
12     (make-lsp-client
13       :new-connection (lsp-tramp-connection "pyls")
14       :major-modes '(python-mode)
15       :remote? t
16       :server-id 'pyls-remote)))

```

2. C/C++ with ccls

```

1 ;; NOTE: WIP: Not tangled
2 (after! tramp
3   (require 'lsp-mode)
4   (require 'ccls)
5
6   (setq lsp-enable-snippet nil
7         lsp-log-io nil
8         lsp-enable-symbol-highlighting t)
9
10   (lsp-register-client
11     (make-lsp-client
12       :new-connection
13       (lsp-tramp-connection
14         (lambda ()
15           (cons ccls-executable ; executable name on remote machine 'ccls'
16                 ccls-args)))
17       :major-modes '(c-mode c++-mode objc-mode cuda-mode)
18       :remote? t
19       :server-id 'ccls-remote))
20
21   (add-to-list 'tramp-remote-path 'tramp-own-remote-path))

```

3. C/C++ with clangd

```

1 (after! tramp
2   (require 'lsp-mode)
3
4   (setq lsp-enable-snippet nil
5         lsp-log-io nil
6         ;; To bypass the "lsp--document-highlight fails if
7         ;; textDocument/documentHighlight is not supported" error
8         lsp-enable-symbol-highlighting nil)
9
10  (lsp-register-client
11    (make-lsp-client
12      :new-connection
13      (lsp-tramp-connection
14        (lambda ()
15          (cons "clangd-12" ; executable name on remote machine 'ccls'
16              lsp-clients-clangd-args)))
17      :major-modes '(c-mode c++-mode objc-mode cuda-mode)
18      :remote? t
19      :server-id 'clangd-remote)))

```

VHDL By default, LSP uses the proprietary VHDL-Tool to provide LSP features; however, there is free and open source alternatives: `ghdl-ls` and `rust_hdl`. I have some issues running `ghdl-ls` installed from `pip` through the `pyghdl` package, so let's use `rust_hdl` instead.

```

1 (use-package! vhd1-mode
2   :hook (vhd1-mode . #'lsp-vhd1-ls-load)
3   :init
4   (defun +lsp-vhd1-ls-load ()
5     (interactive)
6     (lsp t)
7     (flycheck-mode t))
8
9   :config
10  ;; Required unless vhd1_ls is on the $PATH
11  (setq lsp-vhd1-server-path "~/Projects/foss/repos/rust_hdl/target/release/vhd1_ls"
12        lsp-vhd1-server 'vhd1-ls
13        lsp-vhd1-params nil)
14  (require 'lsp-vhd1))

```

```

1 (package! lsp-sonarlint
2   :disable t)

```

SonarLint

```

1 (use-package! lsp-sonarlint)

```

6.4.8 Cppcheck

Check for everything!

```

1 (after! flycheck
2   (setq flycheck-cppcheck-checks '("information"
3                                   "missingInclude"
4                                   "performance"
5                                   "portability"
6                                   "style"))

```

```

7      "unusedFunction"
8      "warning")))) ;; Actually, we can use "all"

```

6.4.9 Project CMake

A good new package to facilitate using CMake projects with Emacs, it glues together `project`, `eglot`, `cmake` and `clangd`.

```

1 (package! project-cmake
2   :disable (not (modulep! :tools lsp +eglot)) ; Enable only if (lsp +eglot) is used
3   :recipe (:host github
4             :repo "juanjosegarciaripoll/project-cmake"))

```

```

1 (use-package! project-cmake
2   :config
3   (require 'eglot)
4   (project-cmake-scan-kits)
5   (project-cmake-eglot-integration))

```

6.4.10 Clang-format

```

1 (package! clang-format)

```

```

1 (use-package! clang-format
2   :when CLANG-FORMAT-P
3   :commands (clang-format-region))

```

6.4.11 Auto-include C++ headers

```

1 (package! cpp-auto-include
2   :recipe (:host github
3             :repo "emacsorphanage/cpp-auto-include"))

```

```

1 (use-package! cpp-auto-include
2   :commands cpp-auto-include)

```

6.4.12 Emacs Refactor

```

1 (package! erefactor
2   :recipe (:host github
3             :repo "mhayashi1120/Emacs-erefactor"))

```

```

1 (use-package! erefactor
2   :defer t)

```

6.4.13 Lorem ipsum

```
1 (use-package! lorem-ipsum
2   :commands (lorem-ipsum-insert-sentences
3               lorem-ipsum-insert-paragraphs
4               lorem-ipsum-insert-list))
```

6.5.1 Emojify

```
1 (setq emojiify-emoji-set "twemoji-v2")
```

We can accommodate our preferences by deleting those entries from the emoji hash table

```

1 (defun emojiify--replace-text-with-emoji (orig-fn emoji text buffer start end &optional target)
2   "Modify `emojiify--propertize-text-for-emoji' to replace ascii/github emoticons with unicode emojis, on the
↳ fly."
3   (if (or (not emoticon-to-emoji) (= 1 (length text)))
4       (funcall orig-fn emoji text buffer start end target)
5       (delete-region start end)
6       (insert (ht-get emoji "unicode"))))
7
8 (define-minor-mode emoticon-to-emoji
9   "Write ascii/gh emojis, and have them converted to unicode live."
10  :global nil
11  :init-value nil
12  (if emoticon-to-emoji
13      (progn
14        (setq-local emojiify-emoji-styles '(ascii github unicode))
15        (advice-add 'emojiify--propertize-text-for-emoji :around #'emojiify--replace-text-with-emoji)
16        (unless emojiify-mode
17          (emojiify-turn-on-emojiify-mode)))
18      (setq-local emojiify-emoji-styles (default-value 'emojiify-emoji-styles))
19      (advice-remove 'emojiify--propertize-text-for-emoji #'emojiify--replace-text-with-emoji)))

```


This new minor mode of ours will be nice for messages, so let's hook it in for Email and IRC.

```
1 (add-hook! '(mu4e-compose-mode org-msg-edit-mode circe-channel-mode) (emoticon-to-emoji 1))
```

6.5.2 Ligatures

Extra ligatures are good, however, I'd like to see my keywords! Let's disable them in C/C++, Rust and Python modes. In addition to that, Lisps do replace lambdas with the greek symbol λ , however, this cause miss formatting and sometimes messes up with the parenthesis, so let's disable ligatures on Lisps.

```
1 (defun +appened-to-negation-list (head tail)
2   (if (sequencep head)
3     (delete-dups
4       (if (eq (car tail) 'not)
5         (append head tail)
6         (append tail head)))
7     tail))
8
9 (when (modulep! :ui ligatures)
10   (setq +ligatures-extras-in-modes
11         (+appened-to-negation-list
12          +ligatures-extras-in-modes
13          '(not c-mode c++-mode emacs-lisp-mode python-mode scheme-mode racket-mode rust-mode)))
14
15   (setq +ligatures-in-modes
16         (+appened-to-negation-list
17          +ligatures-in-modes
18          '(not emacs-lisp-mode scheme-mode racket-mode))))
```

6.6 Checkers (spell & grammar)

6.6.1 Spell-Fu

Install the `aspell` back-end and the dictionaries to use with `spell-fu`

```
sudo pacman -S aspell aspell-en aspell-fr
```

Now, `spell-fu` supports multiple languages! Let's add English, French and Arabic. So I can "mélanger les langues sans avoir de problèmes!".

```
1 (after! spell-fu
2   (defun +spell-fu-register-dictionary (lang)
3     "Add `LANG` to spell-fu multi-dict, with a personal dictionary."
4     ;; Add the dictionary
5     (spell-fu-dictionary-add (spell-fu-get-ispell-dictionary lang))
6     (let ((personal-dict-file (expand-file-name (format "aspell.%s.pws" lang) doom-user-dir)))
7       ;; Create an empty personal dictionary if it doesn't exists
8       (unless (file-exists-p personal-dict-file) (write-region "" nil personal-dict-file))
9       ;; Add the personal dictionary
10      (spell-fu-dictionary-add (spell-fu-get-personal-dictionary (format "%s-personal" lang)
11        personal-dict-file))))
12
13 (add-hook 'spell-fu-mode-hook
14   (lambda ()
15     (+spell-fu-register-dictionary +my/lang-main)
16     (+spell-fu-register-dictionary +my/lang-secondary))))
```

6.6.2 Guess language

Can be interesting for automatically switching the language for spell checking, grammar...

```
1 (package! guess-language
2   :recipe (:host github
3           :repo "tmalsburg/guess-language.el"))
```

```
1 (use-package! guess-language
2   :config
3   (setq guess-language-languages '(en fr ar)
4         guess-language-min-paragraph-length 35
5         guess-language-langcodes '((en . ("en_US" "English" " " "English"))
6                                         (fr . ("français" "French" " " "Français"))
7                                         (ar . ("arabic" "Arabic" " " "Arabic"))))
8   ;; :hook (text-mode . guess-language-mode)
9   :commands (guess-language
10              guess-language-mode
11              guess-language-region
12              guess-language-mark-lines))
```

6.6.3 Grammarly

Use either eglot-grammarly or lsp-grammarly.

```
1 (package! grammarly
2   :recipe (:host github
3           :repo "emacs-grammarly/grammarly"))
```

```
1 (use-package! grammarly
2   :config
3   (grammarly-load-from-authinfo))
```

```
1 (package! eglot-grammarly
2   :disable (not (modulep! :tools lsp +eglot))
3   :recipe (:host github
4           :repo "emacs-grammarly/eglot-grammarly"))
```

Eglot

```
1 (use-package! eglot-grammarly
2   :when (modulep! :tools lsp +eglot)
3   :commands (+lsp-grammarly-load)
4   :init
5   (defun +lsp-grammarly-load ()
6     "Load Grammarly LSP server for Eglot."
7     (interactive)
8     (require 'eglot-grammarly)
9     (call-interactively #'eglot)))
```

```

1 (package! lsp-grammarly
2   :disable (or (not (module! :tools lsp)) (module! :tools lsp +eglot))
3   :recipe (:host github
4           :repo "emacs-grammarly/lsp-grammarly"))

```

LSP Mode

```

1 (use-package! lsp-grammarly
2   :when (and (module! :tools lsp) (not (module! :tools lsp +eglot)))
3   :commands (+lsp-grammarly-load +lsp-grammarly-toggle)
4   :init
5   (defun +lsp-grammarly-load ()
6     "Load Grammarly LSP server for LSP Mode."
7     (interactive)
8     (require 'lsp-grammarly)
9     (lsp-deferred)) ;; or (lsp)
10
11   (defun +lsp-grammarly-enabled-p ()
12     (not (member 'grammarly-ls lsp-disabled-clients)))
13
14   (defun +lsp-grammarly-enable ()
15     "Enable Grammarly LSP."
16     (interactive)
17     (when (not (+lsp-grammarly-enabled-p))
18       (setq lsp-disabled-clients (remove 'grammarly-ls lsp-disabled-clients))
19       (message "Enabled grammarly-ls"))
20     (+lsp-grammarly-load))
21
22   (defun +lsp-grammarly-disable ()
23     "Disable Grammarly LSP."
24     (interactive)
25     (when (+lsp-grammarly-enabled-p)
26       (add-to-list 'lsp-disabled-clients 'grammarly-ls)
27       (lsp-disconnect)
28       (message "Disabled grammarly-ls")))
29
30   (defun +lsp-grammarly-toggle ()
31     "Enable/disable Grammarly LSP."
32     (interactive)
33     (if (+lsp-grammarly-enabled-p)
34         (+lsp-grammarly-disable)
35         (+lsp-grammarly-enable)))
36
37   (after! lsp-mode
38     ;; Disable by default
39     (add-to-list 'lsp-disabled-clients 'grammarly-ls))
40
41   :config
42   (set-lsp-priority! 'grammarly-ls 1))

```

6.6.4 Grammalecte

```

1 (package! flycheck-grammalecte
2   :recipe (:host github
3           :repo "milouse/flycheck-grammalecte"))

```

```

1 (use-package! flycheck-grammalecte
2   :commands (flycheck-grammalecte-correct-error-at-point
3             grammalecte-conjugate-verb
4             grammalecte-define
5             grammalecte-define-at-point
6             grammalecte-find-synonyms
7             grammalecte-find-synonyms-at-point))

```

```

8 :init
9 (setq grammalecte-settings-file (expand-file-name "grammalecte/grammalecte-cache.el" doom-data-dir)
10   grammalecte-python-package-directory (expand-file-name "grammalecte/grammalecte" doom-data-dir))
11
12 (setq flycheck-grammalecte-report-spellcheck t
13       flycheck-grammalecte-report-grammar t
14       flycheck-grammalecte-report-apos nil
15       flycheck-grammalecte-report-esp nil
16       flycheck-grammalecte-report-nbsp nil
17       flycheck-grammalecte-filters
18       '(("(?m)^# ?-*-.+ $"
19          ;; Ignore LaTeX equations (inline and block)
20          "\\$.*?\\$"
21          "(?s)\\\\\\begin{\\{(?!:\\{?:equation.\\\\\\|align.\\\\\\|\\}\\}.*?\\\\\\end{\\{1}\\}"))
22
23 (map! :leader :prefix ("l" . "custom")
24       (:prefix ("g" . "grammalecte")
25         :desc "Correct error at point"      "p" #'flycheck-grammalecte-correct-error-at-point
26         :desc "Conjugate a verb"           "V" #'grammalecte-conjugate-verb
27         :desc "Define a word"              "W" #'grammalecte-define
28         :desc "Conjugate a verb at point"   "w" #'grammalecte-define-at-point
29         :desc "Find synonyms"              "S" #'grammalecte-find-synonyms
30         :desc "Find synonyms at point"      "s" #'grammalecte-find-synonyms-at-point))
31
32 :config
33 (grammalecte-download-grammalecte)
34 (flycheck-grammalecte-setup)
35 (add-to-list 'flycheck-grammalecte-enabled-modes 'fountain-mode))

```

6.6.5 LanguageTool

LanguageTool Server This will launch the LanguageTool Server at startup, this server will be used then by `ltex-ls`.

```

1 (when LANGUAGE TOOL-P
2   (defun +language tool-server-running-p ()
3     (and LANGUAGE TOOL-P
4      (+systemd-running-p "language tool")))
5
6   (defun +language tool-server-start ()
7     "Start LanguageTool server with PORT."
8     (interactive)
9     (unless (+language tool-server-running-p)
10      (+systemd-start "language tool")))
11
12   (defun +language tool-server-stop ()
13     "Stop the LanguageTool server."
14     (interactive)
15     (if (+language tool-server-running-p)
16        (progn
17          (+systemd-stop "language tool")
18          (message "Stopped LanguageTool server.")))
19     (message "No LanguageTool server running."))
20
21   (defun +language tool-server-restart ()
22     (interactive)
23     (when (+language tool-server-running-p)
24      (+language tool-server-stop))
25     (sit-for 5)
26     (+language tool-server-start)))
27
28 (map! :leader :prefix ("l" . "custom")
29       (:when LANGUAGE TOOL-P
30         :prefix ("l" . "language tool")
31         (:prefix ("s" . "server")
32          :desc "Start server"      "s" #' +language tool-server-start

```

```

33 :desc "Stop server"      "q" #' +language-tool-server-stop
34 :desc "Restart server"  "r" #' +language-tool-server-restart)))

```

LTeX Originally, LTeX LS stands for *L^AT_EX Language Server*, it acts as a Language Server for L^AT_EX, but not only. It can check the grammar and the spelling of several markup languages such as BibTeX, ConTeXt, L^AT_EX, Markdown, Org, reStructuredText... and others. Alongside, it provides interfacing with LanguageTool to implement natural language checking.

TO BE WATCHED: Other WIP LanguageTool LSP implementations for both LSP Mode and Eglot can be interesting. However, LTeX seems to be a good solution, as it understands the structure of plain text formats such as Org and Markdown, which reduces the false positives due to the marking and special commands.

```

1  ;; Needed for automatic installation, but not installed automatically
2  (package! github-tags
3    :recipe (:host github
4             :repo "jcs-elpa/github-tags"))
5
6  (package! lsp-ltex
7    :disable (and (not (modulep! :tools lsp)) (modulep! :tools lsp +eglot))
8    :recipe (:host github
9             :repo "emacs-languagetool/lsp-ltex"))
10
11 (package! eglot-ltex
12   :disable (not (modulep! :tools lsp +eglot))
13   :recipe (:host github
14           :repo "emacs-languagetool/eglot-ltex"))

```

```

1  ;; NOTE To be removed by 1 Sep 2022,
2  ;; after https://github.com/doomemacs/doomemacs/pull/6683 gets merged
3  (use-package! lsp-ltex
4    :when (modulep! :checkers grammar +lsp)
5    :unless (modulep! :tools lsp +eglot)
6    :commands (+lsp-ltex-toggle
7              +lsp-ltex-enable
8              +lsp-ltex-disable
9              +lsp-ltex-setup)
10   :hook ((text-mode latex-mode org-mode markdown-mode) . #' +lsp-ltex-setup)
11   :config
12   ;; Disable by default, can be enabled in a per buffer (or workspace) basis
13   (add-to-list 'lsp-disabled-clients 'ltex-ls)
14   :init
15   (setq lsp-ltex-check-frequency "save" ;; Less overhead than the default "edit"
16         lsp-ltex-log-level "warning" ;; No need to log everything
17         ;; Path in which, interactively added words and rules will be stored.
18         lsp-ltex-user-rules-path (expand-file-name "lsp-ltex" doom-data-dir))
19
20   (unless (+languagetool-server-running-p)
21     (+languagetool-server-restart)
22     (sit-for 5))
23
24   (when (+languagetool-server-running-p)
25     (setq lsp-ltex-languagetool-http-server-uri "http://localhost:8081"))
26
27   ;; When n-gram data sets are available, use them to detect errors with words
28   ;; that are often confused (like their and there).
29   (when (file-directory-p "/usr/share/ngrams")
30     (setq lsp-ltex-additional-rules-language-model "/usr/share/ngrams"))
31
32   (defun +lsp-ltex-setup ()
33     "Load LTeX LSP server."
34     (interactive)

```

```

35 (require 'lsp-ltex)
36 (when (+lsp-ltex--enabled-p)
37   (lsp-deferred)))
38
39 (defun +lsp-ltex--enabled-p ()
40   (not (memq 'ltex-ls lsp-disabled-clients)))
41
42 (defun +lsp-ltex-enable ()
43   "Enable LTeX LSP for the current buffer."
44   (interactive)
45   (unless (+lsp-ltex--enabled-p)
46     (setq-local lsp-disabled-clients (delq 'ltex-ls lsp-disabled-clients))
47     (message "Enabled ltex-ls"))
48   (+lsp-ltex-setup))
49
50 (defun +lsp-ltex-disable ()
51   "Disable LTeX LSP for the current buffer."
52   (interactive)
53   (when (+lsp-ltex--enabled-p)
54     (setq-local lsp-disabled-clients (cons 'ltex-ls lsp-disabled-clients))
55     (lsp-disconnect)
56     (message "Disabled ltex-ls")))
57
58 (defun +lsp-ltex-toggle ()
59   "Toggle LTeX LSP for the current buffer."
60   (interactive)
61   (if (+lsp-ltex--enabled-p)
62       (+lsp-ltex-disable)
63       (+lsp-ltex-enable)))
64
65 (map! :localleader
66      :map (text-mode-map latex-mode-map org-mode-map markdown-mode-map)
67      :desc "Toggle grammar check" "G" #' +lsp-ltex-toggle))
68
69 (after! lsp-ltex
70   (add-to-list 'lsp-disabled-clients 'ltex-ls)
71   (setq lsp-ltex-language "auto"
72         lsp-ltex-mother-tongue +my/lang-mother-tongue
73         flycheck-checker-error-threshold 1000))

```

```

1 (package! flycheck-languagetool
2   :recipe (:host github
3           :repo "emacs-languagetool/flycheck-languagetool"))

```

Flycheck

```

1 (use-package! flycheck-languagetool
2   :when LANGUAGETOOL-P
3   :hook (org-msg-edit-mode . flycheck-languagetool-setup)
4   :init
5   (setq flycheck-languagetool-url "http://localhost"
6         flycheck-languagetool-server-port 8081
7         flycheck-languagetool-language "auto"
8         ;; See https://languagetool.org/http-api/swagger-ui/#!/default/post_check
9         flycheck-languagetool-check-params
10         `(("disabledRules" . "FRENCH_WHITESPACE,WHITESPACE,DEUX_POINTS_ESPACE")
11           ("motherTongue" . ,+my/lang-mother-tongue))))

```

6.6.6 Go Translate (Google, Bing and DeepL)

```

1 (package! go-translate
2   :recipe (:host github
3           :repo "lorniu/go-translate"))

4
5
6
7
8
9
10
11
12 (use-package! go-translate
13   :commands (gts-do-translate
14             +gts-yank-translated-region
15             +gts-translate-with)
16   :init
17   ;; Your languages pairs
18   (setq gts-translate-list (list (list +my/lang-main +my/lang-secondary)
19                                 (list +my/lang-main +my/lang-mother-tongue)
20                                 (list +my/lang-secondary +my/lang-mother-tongue)
21                                 (list +my/lang-secondary +my/lang-main)))
22
23   (map! :localleader
24         :map (org-mode-map markdown-mode-map latex-mode-map text-mode-map)
25         :desc "Yank translated region" "R" #' +gts-yank-translated-region)
26
27   (map! :leader :prefix "l"
28         (:prefix ("G" . "go-translate")
29          :desc "Bing" "b" (lambda () (interactive) (+gts-translate-with 'bing))
30          :desc "DeepL" "d" (lambda () (interactive) (+gts-translate-with 'deepl))
31          :desc "Google" "g" (lambda () (interactive) (+gts-translate-with))
32          :desc "Yank translated region" "R" #' +gts-yank-translated-region
33          :desc "gts-do-translate" "t" #' +gts-do-translate))
34
35   :config
36   ;; Config the default translator, which will be used by the command `gts-do-translate`
37   (setq gts-default-translator
38         (gts-translator
39          ;; Used to pick source text, from, to. choose one.
40          :picker (gts-prompt-picker)
41          ;; One or more engines, provide a parser to give different output.
42          :engines (gts-google-engine :parser (gts-google-summary-parser))
43          ;; Render, only one, used to consumer the output result.
44          :render (gts-buffer-render)))
45
46   ;; Custom texter which remove newlines in the same paragraph
47   (defclass +gts-translate-paragraph (gts-texter) ())
48
49   (cl-defmethod gts-text ((_ +gts-translate-paragraph))
50     (when (use-region-p)
51       (let ((text (buffer-substring-no-properties (region-beginning) (region-end))))
52         (with-temp-buffer
53           (insert text)
54           (goto-char (point-min))
55           (let ((case-fold-search nil))
56             (while (re-search-forward "\n[^\n]" nil t)
57               (replace-region-contents
58                (- (point) 2) (- (point) 1)
59                (lambda (&optional a b) " ")))
60             (buffer-string))))))
61
62   ;; Custom picker to use the paragraph texter
63   (defclass +gts-paragraph-picker (gts-picker)
64     ((texter :initarg :texter :initform (+gts-translate-paragraph)))
65
66   (cl-defmethod gts-pick ((o +gts-paragraph-picker))
67     (let ((text (gts-text (oref o texter))))
68       (when (or (null text) (zerop (length text)))
69         (user-error "Make sure there is any word at point, or selection exists"))
70       (let ((path (gts-path o text)))
71         (setq gts-picker-current-path path)
72         (cl-values text path))))))

```

```

62
63 (defun +gts-yank-translated-region ()
64   (interactive)
65   (gts-translate
66     (gts-translator
67       :picker (+gts-paragraph-picker)
68       :engines (gts-google-engine)
69       :render (gts-kill-ring-render))))
70
71 (defun +gts-translate-with (&optional engine)
72   (interactive)
73   (gts-translate
74     (gts-translator
75       :picker (+gts-paragraph-picker)
76       :engines
77         (cond ((eq engine 'deepl)
78               (gts-deepl-engine
79                 :auth-key ;; Get API key from ~/.authinfo.gpg (machine api-free.deepl.com)
80                 (funcall
81                   (plist-get (car (auth-source-search :host "api-free.deepl.com" :max 1))
82                             :secret))
83                 :pro nil))
84               ((eq engine 'bing) (gts-bing-engine))
85               (t (gts-google-engine))))
86     :render (gts-buffer-render))))

```

6.7 System tools

6.7.1 Disk usage

```

1 (package! disk-usage)

```

```

1 (use-package! disk-usage
2   :commands (disk-usage))

```

6.7.2 Chezmoi

```

1 (package! chezmoi)

```

```

1 (use-package! chezmoi
2   :when CHEZMOI-P
3   :commands (chezmoi-write
4             chezmoi-magit-status
5             chezmoi-diff
6             chezmoi-ediff
7             chezmoi-find
8             chezmoi-write-files
9             chezmoi-open-other
10            chezmoi-template-buffer-display
11            chezmoi-mode)
12   :config
13   ;; Company integration
14   (when (modulep! :completion company)
15     (defun +chezmoi--company-backend-h ()
16       (require 'chezmoi-company)
17       (if chezmoi-mode
18         (add-to-list 'company-backends 'chezmoi-company-backend)
19         (delete 'chezmoi-company-backend 'company-backends)))
20

```



```

21 (add-hook 'chezmoi-mode-hook #'chezmoi--company-backend-h))
22
23 ;; Integrate with evil mode by toggling template display when entering insert mode.
24 (when (modulep! :editor evil)
25   (defun +chezmoi--evil-insert-state-enter-h ()
26     "Run after evil-insert-state-entry."
27     (chezmoi-template-buffer-display nil (point))
28     (remove-hook 'after-change-functions #'chezmoi-template--after-change 1))
29
30   (defun +chezmoi--evil-insert-state-exit-h ()
31     "Run after evil-insert-state-exit."
32     (chezmoi-template-buffer-display nil)
33     (chezmoi-template-buffer-display t)
34     (add-hook 'after-change-functions #'chezmoi-template--after-change nil 1))
35
36   (defun +chezmoi--evil-h ()
37     (if chezmoi-mode
38       (progn
39         (add-hook 'evil-insert-state-entry-hook #'chezmoi--evil-insert-state-enter-h nil 1)
40         (add-hook 'evil-insert-state-exit-hook #'chezmoi--evil-insert-state-exit-h nil 1))
41       (progn
42         (remove-hook 'evil-insert-state-entry-hook #'chezmoi--evil-insert-state-enter-h 1)
43         (remove-hook 'evil-insert-state-exit-hook #'chezmoi--evil-insert-state-exit-h 1))))
44
45   (add-hook 'chezmoi-mode-hook #'chezmoi--evil-h)))
46
47 (map! :leader :prefix ("l" . "custom")
48   (:prefix ("t" . "tools")
49     (:when CHEZMOI-P
50       :prefix ("c" . "chezmoi")
51       :desc "Magit status" "g" #'chezmoi-magit-status
52       :desc "Find source" "f" #'chezmoi-find
53       :desc "Sync files" "s" #'chezmoi-sync-files
54       :desc "Diff" "d" #'chezmoi-diff
55       :desc "EDiff" "e" #'chezmoi-ediff
56       :desc "Open other" "o" #'chezmoi-open-other)))

```

6.7.3 Aweshell

```

1 (package! aweshell
2   :recipe (:host github
3           :repo "manateelazycat/aweshell"))

```

```

1 (use-package! aweshell
2   :commands (aweshell-new aweshell-dedicated-open))

```

6.7.4 Lemon

```

1 (package! lemon
2   :recipe (:host nil
3           :repo "https://codeberg.org/emacs-weirdware/lemon.git"))

```

```

1 (use-package! lemon
2   :commands (lemon-mode lemon-display)
3   :config
4   (require 'lemon-cpu)
5   (require 'lemon-memory)
6   (require 'lemon-network)
7   (setq lemon-delay 5)

```

```

8     lemon-refresh-rate 2
9     lemon-monitors
10    (list '((lemon-cpufreq-linux :display-opts '(:sparkline (:type gridded)))
11            (lemon-cpu-linux)
12            (lemon-memory-linux)
13            (lemon-linux-network-tx)
14            (lemon-linux-network-rx))))))

```

6.7.5 eCryptfs

```

1  (when ECRYPTFS-P
2    (defvar +ecryptfs-private-dir "Private")
3    (defvar +ecryptfs-buffer-name "*emacs-ecryptfs*")
4    (defvar +ecryptfs-config-dir (expand-file-name "~/.ecryptfs"))
5    (defvar +ecryptfs-passphrase-gpg (expand-file-name "~/.ecryptfs/my-pass.gpg"))
6    (defvar +ecryptfs--wrapping-independent-p (not (null (expand-file-name "wrapping-independent"
7    ↪ +ecryptfs-config-dir))))
8    (defvar +ecryptfs--wrapped-passphrase-file (expand-file-name "wrapped-passphrase" +ecryptfs-config-dir))
9    (defvar +ecryptfs--mount-passphrase-sig-file (concat (expand-file-name +ecryptfs-private-dir
10    ↪ +ecryptfs-config-dir) ".sig"))
11    (defvar +ecryptfs--mount-private-cmd "/sbin/mount.ecryptfs_private")
12    (defvar +ecryptfs--umount-private-cmd "/sbin/umount.ecryptfs_private")
13    (defvar +ecryptfs--passphrase
14      (lambda ()
15        (s-trim-right ;; To remove the new line
16          (epg-decrypt-file (epg-make-context
17                            +ecryptfs-passphrase-gpg
18                            nil))))))
19    (defvar +ecryptfs--encrypt-filenames-p
20      (not (eq 1
21              (with-temp-buffer
22                (insert-file-contents +ecryptfs--mount-passphrase-sig-file)
23                (count-lines (point-min) (point-max)))))))
24    (defvar +ecryptfs--command-format
25      (if +ecryptfs--encrypt-filenames-p
26          "ecryptfs-insert-wrapped-passphrase-into-keyring %s '%s'"
27          "ecryptfs-unwrap-passphrase %s '%s' | ecryptfs-add-passphrase -"))
28
29    (defun +ecryptfs-mount-private ()
30      (interactive)
31      (unless (and (file-exists-p +ecryptfs--wrapped-passphrase-file)
32                  (file-exists-p +ecryptfs--mount-passphrase-sig-file))
33        (error "Encrypted private directory \"%s\" is not setup properly."
34              +ecryptfs-private-dir)
35        (return))
36
37    (let ((try-again t))
38      (while (and
39              ;; In the first iteration, we try to silently mount the ecryptfs private directory,
40              ;; this would succeed if the key is available in the keyring.
41              (shell-command +ecryptfs--mount-private-cmd
42                            +ecryptfs-buffer-name)
43              try-again)
44        (setq try-again nil)
45        (message "Encrypted filenames mode [%s]." (if +ecryptfs--encrypt-filenames-p "ENABLED" "DISABLED"))
46        (shell-command
47         (format +ecryptfs--command-format
48               +ecryptfs--wrapped-passphrase-file
49               (funcall +ecryptfs--passphrase)
50               +ecryptfs-buffer-name))
51        (message "Ecryptfs mount private.")))
52
53    (defun +ecryptfs-umount-private ()
54      (interactive)
55      (while (string-match-p "Sessions still open, not unmounting"
56                            (shell-command-to-string +ecryptfs--umount-private-cmd))
57        (message "Unmounted private directory.")))

```

```

56
57 (map! :leader :prefix ("l" . "custom")
58   (:prefix ("t" . "tools")
59     (:when ECRYPTFS-P
60       :prefix ("e" . "encryptfs")
61       :desc "eCryptfs mount private" "e" #'+encryptfs-mount-private
62       :desc "eCryptfs un-mount private" "E" #'+encryptfs-umount-private)))

```

6.8 Features

6.8.1 Weather

```

1 ;; lisp/wttrin/wttrin.el taken from:
2 ;; https://raw.githubusercontent.com/tecosaur/emacs-config/master/lisp/wttrin/wttrin.el
3 (package! wttrin
4   :recipe (:local-repo "lisp/wttrin"))

```

```

1 (use-package! wttrin
2   :commands wttrin)

```

6.8.2 OpenStreetMap

```

1 (package! osm)

```

```

1 (use-package! osm
2   :commands (osm-home
3             osm-search
4             osm-server
5             osm-goto
6             osm-gpx-show
7             osm-bookmark-jump)
8
9   :custom
10  ;; Take a look at the customization group `osm' for more options.
11  (osm-server 'default) ;; Configure the tile server
12  (osm-copyright t)    ;; Display the copyright information
13
14  :init
15  (setq osm-tile-directory (expand-file-name "osm" doom-data-dir))
16  ;; Load Org link support
17  (with-eval-after-load 'org
18    (require 'osm-ol)))

```

6.8.3 Islamic prayer times

```

1 (package! awqat
2   :recipe (:host github
3           :repo "zkry/awqat"))

```

```

1 (use-package! awqat
2   :commands (awqat-display-prayer-time-mode awqat-times-for-day)
3   :config
4   ;; Make sure `calendar-latitude' and `calendar-longitude' are set,

```

```

5 ;; otherwise, set them here.
6 (setq awqat-asr-hanafi nil
7       awqat-mode-line-format " ${prayer} (${hours}h${minutes}m) ")
8 (awqat-set-preset-french-muslims))

```

6.8.4 Info colors

Better colors for manual pages.

```

1 (package! info-colors)

```

```

1 (use-package! info-colors
2   :commands (info-colors-fontify-node))
3
4 (add-hook 'Info-selection-hook 'info-colors-fontify-node)

```

6.8.5 Zotero Zotxt

```

1 (package! zotxt)

```

```

1 (use-package! zotxt
2   :when ZOTERO-P
3   :commands org-zotxt-mode)

```

6.8.6 CRDT

Collaborative editing for geeks! `crdt.el` adds support for *Conflict-free Replicated Data Type*.

```

1 (package! crdt)

```

```

1 (use-package! crdt
2   :commands (crdt-share-buffer
3             crdt-connect
4             crdt-visualize-author-mode
5             crdt-org-sync-overlay-mode))

```

6.8.7 The Silver Searcher

An Emacs front-end to *The Silver Searcher*, first we need to install `ag` using `sudo pacman -S the_silver_searcher`.

```

1 (package! ag)

```

```

1 (use-package! ag
2   :when AG-P
3   :commands (ag
4             ag-files
5             ag-regexp
6             ag-project
7             ag-project-files
8             ag-project-regexp))

```

6.8.8 Page break lines

A feature that displays ugly form feed characters as tidy horizontal rules. Inspired by M-EMACS.

```

1 (package! page-break-lines)

1 (use-package! page-break-lines
2   :diminish
3   :init (global-page-break-lines-mode))

```

6.8.9 Emacs Application Framework

EAF is presented as: *A free/libre and open-source extensible framework that revolutionizes the graphical capabilities of Emacs.* Or the key to ultimately *Live in Emacs*.

First, install EAF as specified in the project's readme. To update EAF, we need to run `git pull ; ./install-eaf.py` in `lisp/emacs-application-framework` and (`M-x eaf-install-and-update`) in Emacs. This updates EAF, applications and their dependencies.

```

1 (use-package! eaf
2   :when EAF-P
3   :load-path EAF-DIR
4   :commands (eaf-open
5             eaf-open-browser
6             eaf-open-jupyter
7             +eaf-open-mail-as-html)
8   :init
9   (defvar +eaf-enabled-apps
10    '(org browser mindmap jupyter org-previewer markdown-previewer file-sender video-player))
11
12   (defun +eaf-app-p (app-symbol)
13     (memq app-symbol +eaf-enabled-apps))
14
15   (when (+eaf-app-p 'browser)
16     ;; Make EAF Browser my default browser
17     (setq browse-url-browser-function #'eaf-open-browser)
18     (defalias 'browse-web #'eaf-open-browser))
19
20   (map! :localleader
21         :map (mu4e-headers-mode-map mu4e-view-mode-map)
22         :desc "Open mail as HTML" "h" #'eaf-open-mail-as-html
23         :desc "Open URL (EAF)" "o" #'eaf-open-browser))
24
25   (when (+eaf-app-p 'pdf-viewer)
26     (after! org
27       ;; Use EAF PDF Viewer in Org
28       (defun +eaf--org-open-file-fn (file &optional link)
29         "An wrapper function on `eaf-open'."
30         (eaf-open file))
31
32       ;; use `emacs-application-framework' to open PDF file: link
33       (add-to-list 'org-file-apps '("\\.pdf\\\\" . +eaf--org-open-file-fn)))
34
35     (after! latex
36       ;; Link EAF with the LaTeX compiler in emacs. When a .tex file is open,
37       ;; the Command>Compile and view (C-c C-a) option will compile the .tex
38       ;; file into a .pdf file and display it using EAF. Double clicking on the
39       ;; PDF side jumps to editing the clicked section.
40       (add-to-list 'TeX-command-list '("XeLaTeX" "%\`xelatex --synctex=1%(mode)%" %t TeX-run-TeX nil t))
41       (add-to-list 'TeX-view-program-list '("eaf" eaf-pdf-synctex-forward-view))
42       (add-to-list 'TeX-view-program-selection '(output-pdf "eaf"))))
43
44   :config
45   ;; Generic
46   (setq eaf-start-python-process-when-require t)

```

```

47     eaf-kill-process-after-last-buffer-closed t
48     eaf-fullscreen-p nil)
49
50 ;; Debug
51 (setq eaf-enable-debug nil)
52
53 ;; Web engine
54 (setq eaf-webengine-font-family (symbol-name (font-get doom-font :family)))
55       eaf-webengine-fixed-font-family (symbol-name (font-get doom-font :family))
56       eaf-webengine-serif-font-family (symbol-name (font-get doom-serif-font :family))
57       eaf-webengine-font-size 16
58       eaf-webengine-fixed-font-size 16
59       eaf-webengine-enable-scrollbar t
60       eaf-webengine-scroll-step 200
61       eaf-webengine-default-zoom 1.25
62       eaf-webengine-show-hover-link t
63       eaf-webengine-download-path "~/Downloads"
64       eaf-webengine-enable-plugin t
65       eaf-webengine-enable-javascript t
66       eaf-webengine-enable-javascript-access-clipboard t)
67
68 (when (display-graphic-p)
69   (require 'eaf-all-the-icons)
70   (mapc (lambda (v) (eaf-all-the-icons-icon (car v)))
71         eaf-all-the-icons-alist))
72
73 ;; Browser settings
74 (when (+eaf-app-p 'browser)
75   (setq eaf-browser-continue-where-left-off t
76         eaf-browser-dark-mode nil ;; "follow"
77         eaf-browser-enable-adblocker t
78         eaf-browser-enable-autofill nil
79         eaf-browser-remember-history t
80         eaf-browser-ignore-history-list '("google.com/search" "file:///")
81         eaf-browser-text-selection-color "auto"
82         eaf-browser-translate-language +my/lang-main
83         eaf-browser-blank-page-url "https://www.duckduckgo.com"
84         eaf-browser-chrome-history-file "~/.config/google-chrome/Default/History"
85         eaf-browser-default-search-engine "duckduckgo"
86         eaf-browser-continue-where-left-off t
87         eaf-browser-aria2-auto-file-renaming t)
88
89   (require 'eaf-browser)
90
91   (defun +eaf-open-mail-as-html ()
92     "Open the html mail in EAF Browser."
93     (interactive)
94     (let ((msg (mu4e-message-at-point t))
95           ;; Bind browse-url-browser-function locally, so it works
96           ;; even if EAF Browser is not set as a default browser.
97           (browse-url-browser-function #'eaf-open-browser))
98       (if msg
99         (mu4e-action-view-in-browser msg)
100        (message "No message at point."))))
101
102 ;; File manager settings
103 (when (+eaf-app-p 'file-manager)
104   (setq eaf-file-manager-show-preview nil
105         eaf-find-alternate-file-in-dired t
106         eaf-file-manager-show-hidden-file t
107         eaf-file-manager-show-icon t)
108   (require 'eaf-file-manager))
109
110 ;; File Browser
111 (when (+eaf-app-p 'file-browser)
112   (require 'eaf-file-browser))
113
114 ;; PDF Viewer settings
115 (when (+eaf-app-p 'pdf-viewer)
116   (setq eaf-pdf-dark-mode "follow"

```

```

117     eaf-pdf-show-progress-on-page nil
118     eaf-pdf-dark-exclude-image t
119     eaf-pdf-notify-file-changed t)
120     (require 'eaf-pdf-viewer))
121
122 ;; Org
123 (when (+eaf-app-p 'rss-reader)
124     (setq eaf-rss-reader-split-horizontally nil
125           eaf-rss-reader-web-page-other-window t)
126     (require 'eaf-org))
127
128 ;; Org
129 (when (+eaf-app-p 'org)
130     (require 'eaf-org))
131
132 ;; Mail
133 ;; BUG The `eaf-open-mail-as-html' is not working,
134 ;; I use `+eaf-open-mail-as-html' instead
135 (when (+eaf-app-p 'mail)
136     (require 'eaf-mail))
137
138 ;; Org Previewer
139 (when (+eaf-app-p 'org-previewer)
140     (setq eaf-org-dark-mode "follow")
141     (require 'eaf-org-previewer))
142
143 ;; Markdown Previewer
144 (when (+eaf-app-p 'markdown-previewer)
145     (setq eaf-markdown-dark-mode "follow")
146     (require 'eaf-markdown-previewer))
147
148 ;; Jupyter
149 (when (+eaf-app-p 'jupyter)
150     (setq eaf-jupyter-dark-mode "follow"
151           eaf-jupyter-font-family (symbol-name (font-get doom-font :family))
152           eaf-jupyter-font-size 13)
153     (require 'eaf-jupyter))
154
155 ;; Mindmap
156 (when (+eaf-app-p 'mindmap)
157     (setq eaf-mindmap-dark-mode "follow"
158           eaf-mindmap-save-path "~/Dropbox/Mindmap")
159     (require 'eaf-mindmap))
160
161 ;; File Sender
162 (when (+eaf-app-p 'file-sender)
163     (require 'eaf-file-sender))
164
165 ;; Music Player
166 (when (+eaf-app-p 'music-player)
167     (require 'eaf-music-player))
168
169 ;; Video Player
170 (when (+eaf-app-p 'video-player)
171     (setq eaf-video-player-keybinding
172           '(("p" . "toggle_play")
173             ("q" . "close_buffer")
174             ("h" . "play_backward")
175             ("l" . "play_forward")
176             ("j" . "decrease_volume")
177             ("k" . "increase_volume")
178             ("f" . "toggle_fullscreen")
179             ("R" . "restart"))))
180     (require 'eaf-video-player))
181
182 ;; Image Viewer
183 (when (+eaf-app-p 'image-viewer)
184     (require 'eaf-image-viewer))
185
186 ;; Git

```

```

187 (when (+eaf-app-p 'git)
188   (require 'eaf-git))
189
190 ;; Fix EVIL keybindings
191 (after! evil
192   (require 'eaf-evil)
193   (define-key key-translation-map (kbd "SPC")
194     (lambda (prompt)
195       (if (derived-mode-p 'eaf-mode)
196         (pcase eaf--buffer-app-name
197           ("browser" (if (eaf-call-sync "execute_function" eaf--buffer-id "is_focus")
198                         (kbd "SPC")
199                         (kbd eaf-evil-leader-key)))
200           ("pdf-viewer" (kbd eaf-evil-leader-key))
201           ("image-viewer" (kbd eaf-evil-leader-key))
202           ("music-player" (kbd eaf-evil-leader-key))
203           ("video-player" (kbd eaf-evil-leader-key))
204           ("file-sender" (kbd eaf-evil-leader-key))
205           ("mindmap" (kbd eaf-evil-leader-key))
206           (_ (kbd "SPC"))))
207         (kbd "SPC")))))

```

6.8.10 Bitwarden

```

1 (package! bitwarden
2   :recipe (:host github
3           :repo "seanfarley/emacs-bitwarden"))

```

```

1 (use-package! bitwarden
2   ;;:config
3   ;; (bitwarden-auth-source-enable)
4   :when BITWARDEN-P
5   :init
6   (setq bitwarden-automatic-unlock
7     (lambda ()
8       (require 'auth-source)
9       (if-let* ((matches (auth-source-search :host "bitwarden.com" :max 1))
10                (entry (nth 0 matches))
11                (email (plist-get entry :user))
12                (pass (plist-get entry :secret)))
13         (progn
14           (setq bitwarden-user email)
15           (if (functionp pass) (funcall pass) pass))
16         ""))))

```

6.8.11 PDF tools

Dark mode The pdf-tools package supports dark mode (midnight), I use Emacs often to write and read PDF documents, so let's make it dark by default, this can be toggled using the `m z`.

```

1 (after! pdf-tools
2   (add-hook! 'pdf-view-mode-hook
3     (when (memq doom-theme '(modus-vivendi doom-one doom-dark+ doom-vibrant))
4       ;; TODO: find a more generic way to detect if we are in a dark theme
5       (pdf-view-midnight-minor-mode 1)))
6
7   ;; Color the background, so we can see the PDF page borders
8   ;; https://protesilaos.com/emacs/modus-themes#h:ff69dfe1-29c0-447a-915c-b5ff7c5509cd
9   (defun +pdf-tools-backdrop ()
10     (face-remap-add-relative
11       'default
12       `(:background ,(if (memq doom-theme '(modus-vivendi modus-operandi))

```



```

13      (modus-themes-color 'bg-alt)
14      (doom-color 'bg-alt))))))
15
16      (add-hook 'pdf-tools-enabled-hook #'pdf-tools-backdrop))
17
18      (after! pdf-links
19        ;; Tweak for Modus and `pdf-links'
20        (when (memq doom-theme '(modus-vivendi modus-operandi))
21          ;; https://protesilaos.com/emacs/modus-themes#h:2659d13e-b1a5-416c-9a89-7c3ce3a76574
22          (let ((spec (apply #'append
23                            (mapcar
24                              (lambda (name)
25                                (list name
26                                      (face-attribute 'pdf-links-read-link
27                                                        name nil 'default))))
28                                '(:family :width :weight :slant))))))
29            (setq pdf-links-read-link-convert-commands
30              `("-density"      "96"
31                "-family"      ,(plist-get spec :family)
32                "-stretch"     ,(let* ((width (plist-get spec :width))
33                                         (name (symbol-name width)))
34                                   (replace-regexp-in-string "-" ""
35                                                             (capitalize name)))
36                "-weight"     ,(pcase (plist-get spec :weight)
37                                  ('ultra-light "Thin")
38                                  ('extra-light "ExtraLight")
39                                  ('light       "Light")
40                                  ('semi-bold   "SemiBold")
41                                  ('bold        "Bold")
42                                  ('extra-bold   "ExtraBold")
43                                  ('ultra-bold   "Black")
44                                  (_weight      "Normal"))
45                "-style"      ,(pcase (plist-get spec :slant)
46                                  ('italic      "Italic")
47                                  ('oblique     "Oblique")
48                                  (_slant       "Normal"))
49                "-pointsize"   "%P"
50                "-undercolor"   "%f"
51                "-fill"        "%b"
52                "-draw"         "text %X,%Y '%c'"))))))

```

6.8.12 LTDR

Add the `tldr.el` client for TLDR pages.

```

1 (package! tldr)

```

```

1 (use-package! tldr
2   :commands (tldr-update-docs tldr)
3   :init
4   (setq tldr-enabled-categories '("common" "linux" "osx" "sunos")))

```

6.8.13 FZF

```

1 (package! fzf)

```

```

1 (after! evil
2   (evil-define-key 'insert fzf-mode-map (kbd "ESC") #'term-kill-subjob))
3
4 (define-minor-mode fzf-mode

```

```

5  "Minor mode for the FZF buffer"
6  :init-value nil
7  :lighter " FZF"
8  :keymap '("C-c" . term-kill-subjob)))
9
10 (defadvice! doom-fzf--override-start-args-a (original-fn &rest args)
11   "Set the FZF minor mode with the fzf buffer."
12   :around #'fzf/start
13   (message "called with args %S" args)
14   (apply original-fn args)
15
16   ;; set the FZF buffer to fzf-mode so we can hook ctrl+c
17   (set-buffer "*fzf*")
18   (fzf-mode))
19
20 (defvar fzf/args
21   "-x --print-query -m --tiebreak=index --expect=ctrl-v,ctrl-x,ctrl-t")
22
23 (use-package! fzf
24   :commands (fzf fzf-projectile fzf-hg fzf-git fzf-git-files fzf-directory fzf-git-grep))

```

6.8.14 Binary files

Inspired by this discussion.

Add the new `nhexl-mode` which allows editing files in Hex mode.

```

1  (package! nhexl-mode)

```

```

1  (defun +buffer-binary-p (&optional buffer)
2    "Return whether BUFFER or the current buffer is binary.
3
4    A binary buffer is defined as containing at least one null byte.
5
6    Returns either nil, or the position of the first null byte."
7    (with-current-buffer (or buffer (current-buffer))
8      (save-excursion (goto-char (point-min))
9        (search-forward (string ?\x00) nil t 1))))
10
11 (defun +hexl--buffer-p ()
12   (and (+buffer-binary-p)
13        ;; Executables are viewed with objdump mode
14        (not (+buffer-objdump-p))))
15
16 (defun +hexl-if-binary ()
17   "If `hexl-mode' is not already active, and the current buffer
18   is binary, activate `hexl-mode'."
19   (interactive)
20   (unless (eq major-mode 'hexl-mode)
21     (when (+hexl--buffer-p)
22       (hexl-mode))))
23
24 (add-to-list 'magic-fallback-mode-alist '(+hexl--buffer-p . +hexl-if-binary) t)

```

6.8.15 Objdump mode

Define a major mode (`objdump-disassemble-mode`) to display executable files as assembly code using `objdump`. The file types are detected using the `file` utility.

```

1  (defun +buffer-objdump-p (&optional buffer file)
2    "Can the BUFFER be viewed as a disassembled code with objdump."
3    (when-let ((file (or file (buffer-file-name (or buffer (current-buffer)))))
4      (and

```

```

5  (file-exists-p file)
6  (not (file-directory-p file))
7  (not (zerop (file-attribute-size (file-attributes file))))
8  (not (string-match-p
9      "file format not recognized"
10     (with-temp-buffer
11       (shell-command (format "objdump --file-headers %s"
12                             (shell-quote-argument "/home/hacko/Softwares/Kasparov/Kasparov
↪ Chessmate/KasparovChess.Stats"))
13         (current-buffer))
14       (buffer-string))))))
15
16 (when OBJDUMP-P
17   (define-derived-mode objdump-disassemble-mode
18     asm-mode "Objdump Mode"
19     "Major mode for viewing executable files disassembled using objdump."
20     (if (not (+buffer-objdump-p))
21         (message "Objdump can not be used with this buffer.")
22         (let ((file (buffer-file-name))
23               (buffer-read-only nil))
24             (erase-buffer)
25             (message "Disassembling file \"%s\" using objdump." (file-name-nondirectory file))
26             (call-process "objdump" nil (current-buffer) nil "-d" file)
27             (set-buffer-modified-p nil)
28             (goto-char (point-min))
29             (view-mode)
30             (set-visited-file-name nil t))))
31
32   (add-to-list 'magic-fallback-mode-alist '(+buffer-objdump-p . objdump-disassemble-mode) t))

```

6.9 Fun

6.9.1 Speed Type

A game to practice speed typing in Emacs.

```
1 (package! speed-type)
```

```
1 (use-package! speed-type
2   :commands (speed-type-text))
```

6.9.2 2048 Game

```
1 (package! 2048-game)
```

```
1 (use-package! 2048-game
2   :commands (2048-game))
```

6.9.3 Snow

Let it snow in Emacs!

```
1 (package! snow)
```

```

1 (use-package! snow
2   :commands (snow))

```

6.9.4 xkcd

```

1 (package! xkcd
2   :recipe (:host github
3           :repo "vibhavg/emacs-xkcd"))

```

```

1 (use-package! xkcd
2   :commands (xkcd-get xkcd)
3   :config
4   (setq xkcd-cache-dir (expand-file-name "xkcd/" doom-cache-dir)
5         xkcd-cache-latest (expand-file-name "xkcd/latest" doom-cache-dir)))

```

7 Applications

7.1 Calendar

```

1 (setq calendar-latitude 48.7
2       calendar-longitude 2.17
3       calendar-location-name "Orsay, FR"
4       calendar-time-display-form
5       '(24-hours ":" minutes
6         (if time-zone " (") time-zone (if time-zone ")")))

```

7.2 e-Books (nov)

```

1 (package! nov)

```

Use nov to read EPUB e-books.

```

1 (use-package! nov
2   :mode ("\\.epub\\\\" . nov-mode)
3   :config
4   (map! :map nov-mode-map
5         :n "RET" #'nov-scroll-up)
6
7   (defun doom-modeline-segment--nov-info ()
8     (concat " "
9             (propertize (cdr (assoc 'creator nov-metadata))
10                          'face 'doom-modeline-project-parent-dir)
11             " "
12             (cdr (assoc 'title nov-metadata))
13             " "
14             (propertize (format "%d/%d" (1+ nov-documents-index) (length nov-documents))
15                          'face 'doom-modeline-info)))
16
17   (advice-add 'nov-render-title :override #'ignore)
18
19   (defun +nov-mode-setup ()
20     (face-remap-add-relative 'variable-pitch
21                              :family "Merriweather"
22                              :height 1.4
23                              :width 'semi-expanded))

```

```

24 (face-remap-add-relative 'default :height 1.3)
25 (setq-local line-spacing 0.2
26             next-screen-context-lines 4
27             shr-use-colors nil)
28 (require 'visual-fill-column nil t)
29 (setq-local visual-fill-column-center-text t
30             visual-fill-column-width 80
31             nov-text-width 80)
32 (visual-fill-column-mode 1)
33 (hl-line-mode -1)
34
35 (add-to-list '+lookup-definition-functions
36             #'lookup/dictionary-definition)
37
38 (setq-local mode-line-format
39             `((:eval
40                (doom-modeline-segment--workspace-name))
41                (:eval
42                 (doom-modeline-segment--window-number))
43                (:eval
44                 (doom-modeline-segment--nov-info))
45                , (propertize
46                   " %P "
47                   'face 'doom-modeline-buffer-minor-mode)
48                , (propertize
49                   " "
50                   'face (if (doom-modeline--active) 'mode-line 'mode-line-inactive)
51                   'display `(:space
52                              :align-to
53                              (- (+ right right-fringe right-margin)
54                                 ,(* (let ((width (doom-modeline--font-width)))
55                                     (or (and (= width 1) 1)
56                                         (/ width (frame-char-width) 1.0)))
57                                     (string-width
58                                     (format-mode-line (cons "" '(:eval
59 ↪ (doom-modeline-segment--major-mode))))))))))
60                (:eval (doom-modeline-segment--major-mode))))))
61
62 (add-hook 'nov-mode-hook #'nov-mode-setup))

```

7.3 News feed (elfeed)

Set RSS news feeds

```

1 (setq elfeed-feeds
2   '("https://this-week-in-rust.org/rss.xml"
3     "https://planet.emacslife.com/atom.xml"
4     "https://www.omgubuntu.co.uk/feed"
5     "https://itsfoss.com/feed"
6     "https://linuxhandbook.com/feed"
7     "https://spectrum.ieee.org/rss/robotics/fulltext"
8     "https://spectrum.ieee.org/rss/aerospace/fulltext"
9     "https://spectrum.ieee.org/rss/computing/fulltext"
10    "https://spectrum.ieee.org/rss/blog/automaton/fulltext"
11    "https://developers.redhat.com/blog/feed"
12    "https://lwn.net/headlines/rss"))

```

7.4 VPN configuration

7.4.1 NetExtender wrapper

I store my NetExtender VPN parameters in a GPG encrypted file. The credentials file contains a line of private parameters to pass to netExtender, like this:

```

1 echo "-u <USERNAME> -d <DOMAINE> -p <PASSWORD> -s <SERVER_IP>" \
2 | gpg -c > sslvpn.gpg

```

Then I like to have a simple script which decrypt the credentials and launch a session via the `netExtender` command.

```

1 #!/bin/bash
2
3 if ! command -v netExtender &> /dev/null
4 then
5     echo "netExtender not found, installing from AUR using 'yay'"
6     yay -S netextender
7 fi
8
9 MY_LOGIN_PARAMS_FILE="$HOME/.ssh/sslvpn.gpg"
10
11 echo "Y\n" | netExtender --auto-reconnect \
12 $(gpg -q --for-your-eyes-only --no-tty -d "${MY_LOGIN_PARAMS_FILE}")

```

7.4.2 Emacs + NetExtender

```

1 (when NETEXTENDER-P
2   (defvar +netextender-process-name "netextender")
3   (defvar +netextender-buffer-name " *NetExtender*")
4   (defvar +netextender-command '("~/local/bin/netextender"))
5
6   (defun +netextender-start ()
7     "Launch a NetExtender VPN session"
8     (interactive)
9     (unless (get-process +netextender-process-name)
10      (if (make-process :name +netextender-process-name
11                       :buffer +netextender-buffer-name
12                       :command +netextender-command)
13          (message "Started NetExtender VPN session")
14          (message "Cannot start NetExtender")))))
15
16   (defun +netextender-kill ()
17     "Kill the created NetExtender VPN session"
18     (interactive)
19     (when (get-process +netextender-process-name)
20      (if (kill-buffer +netextender-buffer-name)
21          (message "Killed NetExtender VPN session")
22          (message "Cannot kill NetExtender")))))

```

7.5 Email (mu4e)

Configuring `mu4e` as email client needs three parts:

- Incoming mail configuration IMAP (using `mbsync`)
- Outgoing mail configuration SMTP (using `smtpmail` or `msmtp`)
- Email indexer and viewer (via `mu` and `mu4e`)

7.5.1 IMAP (mbsync)

You will need to:

- Install `mu` and `isync` (`sudo pacman -S mu isync`)
- Set up a proper configuration file for your accounts at `~/.mbsyncrc`

- Run `mu init --maildir=~/.Maildir --my-address=user@host1 --my-address=user@host2`
- Run `mbsync -c ~/.mbsyncrc -a`
- For sending mails from mu4e, add a `~/.authinfo` file, file contains a line in this format `machine MAIL.DOMAIN.TLD login USER port 587 password PASSWD`
- Encrypt the `~/.authinfo` file using GPG `gpg -c ~/.authinfo` and delete the original unencrypted file.

I use a `mbsyncrc` file for multi-accounts, with some hacks for Gmail accounts (to rename the [Gmail]/... folders). Here is an explained configuration example.

In the configuration file, there is a parameter named `Pass` which should be set to the password in plain text. Most of the examples you can find online uses this parameter, but in real life, nobody uses it, it is extremely unsafe to put the password in plain text configuration file. Instead, `mbsync` configuration file provides the alternative `PassCmd` parameter, which can be set to an arbitrary shell command which gets the password for you. You can set it for example to call the `pass` password manager to output the account password, or to `bw` command (for Bitwarden users). For me, I'm using it with Emacs' `~/.authinfo.gpg`, the `PassCmd` in my configuration uses GPG and `awk` to decrypt and filter the file content to find the required account's password. I set `PassCmd` to something like this:

```
1 gpg -q --for-your-eyes-only --no-tty --logger-file /dev/null --batch -d ~/.authinfo.gpg | awk '/machine
↪ smtp.googlemail.com login username@gmail.com/ {print $NF}'
```

Remember the line format in the `~/.authinfo.gpg` file:

```
1 machine smtp.googlemail.com login username@gmail.com port 587 password PASSWD
```

This `PassCmd` command above, decrypts the `~/.authinfo.gpg`, passes it to `awk` to search the line containing "machine smtp.googlemail.com login username@gmail.com" and prints the last field (the last field `$NF` in the `awk` command corresponds to the password, as you can see in the line format).

The whole `~/.mbsync` file should look like this:

```
1 # mbsync config file
2 # GLOBAL OPTIONS
3 BufferLimit 50mb           # Global option: Default buffer size is 10M, too small for modern machines.
4 Sync All                  # Channels global: Sync everything "Pull Push New ReNew Delete Flags" (default
↪ option)
5 Create Both               # Channels global: Automatically create missing mailboxes on both sides
6 Expunge Both              # Channels global: Delete messages marked for deletion on both sides
7 CopyArrivalDate yes       # Channels global: Propagate arrival time with the messages
8
9 # SECTION (IMAP4 Accounts)
10 IMAPAccount work          # IMAP Account name
11 Host mail.host.ccc        # The host to connect to
12 User user@host.ccc        # Login user name
13 SSLVersions TLSv1.2 TLSv1.1 # Supported SSL versions
14 # Extract password from encrypted ~/.authinfo.gpg
15 # File format: "machine <SERVER> login <LOGIN> port <PORT> password <PASSWORD>"
16 # This uses sed to extract <PASSWORD> from line matching the account's <SERVER>
17 PassCmd "gpg2 -q --for-your-eyes-only --no-tty --logger-file /dev/null --batch -d ~/.authinfo.gpg | awk
↪ '/machine smtp.domain.tld/ {print $NF}'"
18 AuthMechs *               # Authentication mechanisms
19 SSLType IMAPS              # Protocol (STARTTLS/IMAPS)
20 CertificateFile /etc/ssl/certs/ca-certificates.crt
21 # END OF SECTION
22 # IMPORTANT NOTE: you need to keep the blank line after each section
23
24 # SECTION (IMAP Stores)
25 IMAPStore work-remote     # Remote storage name
26 Account work              # Associated account
27 # END OF SECTION
28
29 # SECTION (Maildir Stores)
```

```

30 MaildirStore work-local      # Local storage (create directories with mkdir -p ~/Maildir/<ACCOUNT-NAME>)
31 Path ~/Maildir/work/        # The local store path
32 Inbox ~/Maildir/work/Inbox   # Location of the INBOX
33 SubFolders Verbatim         # Download all sub-folders
34 # END OF SECTION
35
36 # Connections specify links between remote and local folders
37 # they are specified using patterns, which match remote mail
38 # folders. Some commonly used patterns include:
39 #
40 # - "*" to match everything
41 # - "!DIR" to exclude "DIR"
42 # - "DIR" to match DIR
43 #
44 # SECTION (Channels)
45 Channel work                 # Channel name
46 Far :work-remote:            # Connect remote store
47 Near :work-local:            # to the local one
48 Patterns "INBOX" "Drafts" "Sent" "Archives/*" "Spam" "Trash"
49 SyncState *                  # Save state in near side mailbox file ".mbsyncstate"
50 # END OF SECTION
51
52 # =====
53
54 IMAPAccount gmail
55 Host imap.gmail.com
56 User user@gmail.com
57 PassCmd "gpg2 -q --for-your-eyes-only --no-tty --logger-file /dev/null --batch -d ~/.authinfo.gpg | awk
58 ↪ '/machine smtp.domain.tld/ {print $NF}'"
59 AuthMechs LOGIN
60 SSLType IMAPS
61 CertificateFile /etc/ssl/certs/ca-certificates.crt
62
63 IMAPStore gmail-remote
64 Account gmail
65
66 MaildirStore gmail-local
67 Path ~/Maildir/gmail/
68 Inbox ~/Maildir/gmail/Inbox
69
70 # For Gmail, I like to make multiple channels, one for each remote directory
71 # this is a trick to rename remote "[Gmail]/mailbox" to "mailbox"
72 Channel gmail-inbox
73 Far :gmail-remote:
74 Near :gmail-local:
75 Patterns "INBOX"
76 SyncState *
77
78 Channel gmail-trash
79 Far :gmail-remote: "[Gmail]/Trash"
80 Near :gmail-local: "Trash"
81 SyncState *
82
83 Channel gmail-drafts
84 Far :gmail-remote: "[Gmail]/Drafts"
85 Near :gmail-local: "Drafts"
86 SyncState *
87
88 Channel gmail-sent
89 Far :gmail-remote: "[Gmail]/Sent Mail"
90 Near :gmail-local: "Sent Mail"
91 SyncState *
92
93 Channel gmail-all
94 Far :gmail-remote: "[Gmail]/All Mail"
95 Near :gmail-local: "All Mail"
96 SyncState *
97
98 Channel gmail-starred
99 Far :gmail-remote: "[Gmail]/Starred"

```



```

99 Near :gmail-local:"Starred"
100 SyncState *
101
102 Channel gmail-spam
103 Far :gmail-remote:"[Gmail]/Spam"
104 Near :gmail-local:"Spam"
105 SyncState *
106
107 # GROUPS PUT TOGETHER CHANNELS, SO THAT WE CAN INVOKE
108 # MBSYNC ON A GROUP TO SYNC ALL CHANNELS
109 #
110 # FOR INSTANCE: "mbsync gmail" GETS MAIL FROM
111 # "gmail-inbox", "gmail-sent", and "gmail-trash"
112 #
113 # SECTION (Groups)
114 Group gmail
115 Channel gmail-inbox
116 Channel gmail-sent
117 Channel gmail-trash
118 Channel gmail-drafts
119 Channel gmail-all
120 Channel gmail-starred
121 Channel gmail-spam
122 # END OF SECTION

```

7.5.2 SMTP (msmtp)

I was using the standard `smtpmail` to send mails; but recently, I'm getting problems when sending mails. I passed a whole day trying to fix mail sending for one of my accounts, at the end of the day, I got a working setup; BUT, sending the first mail always ask me about password! I need to enter the password to be able to send the mail, Emacs asks me then if I want to save it to `~/.authinfo.gpg`, when I confirm saving it, it got duplicated in the `.authinfo.gpg` file.

This seems to be a bug; I also found somewhere that `smtpmail` is buggy, and that `msmtp` seems to be a good alternative, so now I'm using a `msmtp`-based setup, and it works like a charm!

For this, we will need an additional configuration file, `~/.msmtp.rc`, I configure it the same way as `mbsync`, specifying this time SMTP servers instead of IMAP ones. I extract the passwords from `~/.authinfo.gpg` using GPG and `awk`, the same way we did in `mbsync`'s configuration.

The following is a sample file `~/.msmtp.rc`.

```

1  # Set default values for all following accounts.
2  defaults
3  auth                on
4  tls                 on
5  tls_starttls        on
6  tls_trust_file       /etc/ssl/certs/ca-certificates.crt
7  logfile              ~/.msmtp.log
8
9  # Gmail
10 account              gmail
11 auth                 plain
12 host                 smtp.googlemail.com
13 port                 587
14 from                 username@gmail.com
15 user                 username
16 password             "gpg -q --for-your-eyes-only --no-tty --logger-file /dev/null --batch -d
17 ↪ ~/.authinfo.gpg | awk '/machine smtp.googlemail.com login .*/@gmail.com/ {print $NF}'"
18 add_missing_date_header on
19
20 ## Gmail - aliases
21 account              alias-account : gmail
22 from                 alias@mail.com
23
24 account              other-alias : gmail
25 from                 other.alias@address.org

```

```

26 # Work
27 account                work
28 auth                   on
29 host                   smtp.domaine.tld
30 port                   587
31 from                   username@domaine.tld
32 user                   username
33 passwordeval           "gpg -q --for-your-eyes-only --no-tty --logger-file /dev/null --batch -d
↪ ~/.authinfo.gpg | awk '/machine smtp.domaine.tld/ {print $NF}'"
34 tls_nocertcheck # ignore TLS certificate errors

```

7.5.3 Mail client and indexer (mu and mu4e)

Add mu4e to path if it exists on the file system.

```

1 (add-to-list 'load-path "/usr/local/share/emacs/site-lisp/mu4e")

```

I configure my email accounts in a private file in `lisp/private/+mu4e-accounts.el`, which will be loaded after this common part:

```

1 (after! mu4e
2   (require 'org-msg)
3   (require 'mu4e-contrib)
4   (require 'mu4e-icalendar)
5   (require 'org-agenda)
6
7   ;; Common parameters
8   (setq mu4e-update-interval (* 3 60) ;; Every 3 min
9         mu4e-index-update-error-warning nil ;; Do not show warning after update
10        mu4e-get-mail-command "mbsync -a" ;; Not needed, as +mu4e-backend is 'mbsync by default
11        mu4e-main-hide-personal-addresses t ;; No need to display a long list of my own addresses!
12        mu4e-attachment-dir (expand-file-name "~/Downloads/mu4e-attachements")
13        mu4e-sent-messages-behavior 'sent ;; Save sent messages
14        mu4e-context-policy 'pick-first ;; Start with the first context
15        mu4e-compose-context-policy 'ask) ;; Always ask which context to use when composing a new mail
16
17
18   ;; Use msmtp instead of smtpmail
19   (setq sendmail-program (executable-find "msmtp")
20         send-mail-function #'smtpmail-send-it
21         message-sendmail-f-is-evil t
22         message-sendmail-extra-arguments '("--read-envelope-from")
23         message-send-mail-function #'message-send-mail-with-sendmail
24         message-sendmail-envelope-from 'obey-mail-envelope-from
25         mail-envelope-from 'header
26         mail-personal-alias-file (expand-file-name "mail-aliases.mailrc" doom-user-dir)
27         mail-specify-envelope-from t)
28
29   (setq mu4e-headers-fields '(:flags . 6) ;; 3 flags
30         (:account-stripe . 2)
31         (:from-or-to . 25)
32         (:folder . 10)
33         (:recipnum . 2)
34         (:subject . 80)
35         (:human-date . 8))
36
37   +mu4e-min-header-frame-width 142
38   mu4e-headers-date-format "%d/%m/%y"
39   mu4e-headers-time-format "%H:%M"
40   mu4e-search-results-limit 1000
41   mu4e-index-cleanup t)
42
43 (defvar +mu4e-header--folder-colors nil)
44 (appendq! mu4e-header-info-custom
45   '(:folder .
46     (name "Folder" :shortname "Folder" :help "Lowest level folder" :function
47       (lambda (msg)

```

```

47      (+mu4e-colorize-str
48      (replace-regexp-in-string "\\`.*/" "" (mu4e-message-field msg :maildir))
49      '+mu4e-header--folder-colors))))))
50
51 ;; Add a unified inbox shortcut
52 (add-to-list
53 'mu4e-bookmarks
54 '(name "Unified inbox" :query "maildir:/.*inbox/" :key ?i) t)
55
56 ;; Add shortcut to view yesterday's messages
57 (add-to-list
58 'mu4e-bookmarks
59 '(name "Yesterday's messages" :query "date:1d..today" :key ?y) t)
60
61 ;; Load a list of my email addresses '+my-addresses', defined as:
62 ;; (setq +my-addresses '("user@gmail.com" "user@hotmail.com"))
63 (load! "lisp/private/+my-addresses.el")
64
65 (when (bound-and-true-p +my-addresses)
66   ;; I like always to add myself in BCC, Lets add a bookmark to show all my BCC mails
67   (defun +mu-long-query (query oper arg-list)
68     (concat "(" (+str-join (concat " " oper " ") (mapcar (lambda (addr) (format "%s:%s" query addr))
69     ↪ arg-list)) ")))
70
71   ;; Build a query to match mails send from "me" with "me" in BCC
72   (let ((bcc-query (+mu-long-query "bcc" "or" +my-addresses))
73         (from-query (+mu-long-query "from" "or" +my-addresses)))
74     (add-to-list
75       'mu4e-bookmarks
76       (list :name "My black copies" :query (format "%s and %s" from-query bcc-query) :key ?k) t)))
77
78 ;; `mu4e-alert' configuration
79 ;; Use a nicer icon in alerts
80 (setq mu4e-alert-icon "/usr/share/icons/Papirus/64x64/apps/mail-client.svg")
81
82 (defun +mu4e-alert-helper-name-or-email (msg)
83   (let* ((from (car (plist-get msg :from)))
84          (name (plist-get from :name)))
85     (if (or (null name) (eq name ""))
86         (plist-get from :email)
87         name)))
88
89 (defun +mu4e-alert-grouped-mail-notif-formatter (mail-group _all-mails)
90   (when +mu4e-alert-bell-cmd
91     (start-process "mu4e-alert-bell" nil (car +mu4e-alert-bell-cmd) (cdr +mu4e-alert-bell-cmd)))
92   (let* ((filtered-mails (+filter
93     (lambda (msg)
94       (not (string-match-p "\\(junk\\|spam\\|trash\\|deleted\\)"
95       (downcase (plist-get msg :maildir))))
96     mail-group))
97     (mail-count (length filtered-mails)))
98     (list
99       :title (format "You have %d unread email%s"
100       mail-count (if (> mail-count 1) "s" ""))
101       :body (concat
102         "• "
103         (+str-join
104           "\n• "
105           (mapcar
106             (lambda (msg)
107               (format "<b>%s</b>: %s"
108               (+mu4e-alert-helper-name-or-email msg)
109               (plist-get msg :subject)))
110             filtered-mails))))))
111
112 ;; I use auto-hiding task manager, setting window
113 ;; urgency shows the entier task bar (in KDE), which I find annoying.
114 (setq mu4e-alert-set-window-urgency nil
115       mu4e-alert-grouped-mail-notification-formatter #' +mu4e-alert-grouped-mail-notif-formatter)
116

```

```

116 ;; Org-Msg stuff
117 ;; org-msg-[signature/greeting-fmt] are separately set for each account
118 (map! :map org-msg-edit-mode-map
119       :after org-msg
120       :n "G" #'org-msg-goto-body)
121
122 (map! :localleader
123       :map (mu4e-headers-mode-map mu4e-view-mode-map)
124       :desc "Open URL in Brave" "b" #'browse-url-chrome ;; Brave
125       :desc "Open URL in Firefox" "f" #'browse-url-firefox)
126
127 ;; I like to always BCC myself
128 (defun +bbc-me ()
129   "Add my email to BCC."
130   (save-excursion (message-add-header (format "Bcc: %s\n" user-mail-address))))
131
132 (add-hook 'mu4e-compose-mode-hook '+bbc-me)
133
134 ;; Load my accounts
135 (load! "lisp/private/+mu4e-accounts.el")
136
137 ;; iCalendar / Org
138 (mu4e-icalendar-setup)
139 (setq mu4e-icalendar-trash-after-reply nil
140       mu4e-icalendar-diary-file "~/Dropbox/Org/diary-invitations.org"
141       gnus-icalendar-org-capture-file "~/Dropbox/Org/notes.org"
142       gnus-icalendar-org-capture-headline '("Calendar"))
143
144 ;; To enable optional iCalendar->Org sync functionality
145 ;; NOTE: both the capture file and the headline(s) inside must already exist
146 (gnus-icalendar-org-setup))

```

The `lisp/private/+mu4e-accounts.el` file includes Doom's mu4e multi-account configuration as follows:

```

1 (set-email-account!
2   "Work" ;; Account label
3
4   ;; Mu4e folders
5   '( (mu4e-sent-folder      . "/work-dir/Sent")
6     (mu4e-drafts-folder    . "/work-dir/Drafts")
7     (mu4e-trash-folder     . "/work-dir/Trash")
8     (mu4e-refile-folder    . "/work-dir/Archive")
9
10    ;; Org-msg template (signature and greeting)
11    (org-msg-greeting-fmt   . "Hello%s,")
12    (org-msg-signature      . "
13
14    Regards,
15
16    #+begin_signature
17    -----
18    *Abdelhak BOUGOUFFA* \\\
19    /PhD. Candidate in Robotics | R&D Engineer/ \\\
20    /Paris-Saclay University - SATIE/MOSS | ez-Wheel/ \\\
21    #+end_signature")
22
23    ;; 'smtpmail' options, no need for these when using 'msmtpl'
24    (smtpmail-smtp-user      . "username@server.com")
25    (smtpmail-smtp-server    . "smtps.server.com")
26    (smtpmail-stream-type    . ssl)
27    (smtpmail-smtp-service   . 465)
28
29    ;; By default, 'smtpmail' will try to send mails without authentication, and if rejected,
30    ;; it tries to send credentials. This behavior broke my configuration. So I set this
31    ;; variable to tell 'smtpmail' to require authentication for our server (using a regex).
32    (smtpmail-servers-requiring-authorization . "smtps\\.server\\.com"))
33
34   t) ;; Use as default/fallback account
35

```

```

36 ;; Set another account
37 (set-email-account!
38   "Gmail"
39   '( (mu4e-sent-folder      . "/gmail-dir/Sent")
40     (mu4e-drafts-folder    . "/gmail-dir/Drafts")
41     (mu4e-trash-folder     . "/gmail-dir/Trash")
42     (mu4e-refile-folder    . "/gmail-dir/Archive")
43     (org-msg-greeting-fmt  . "Hello%s,")
44     (org-msg-signature     . "-- SIGNATURE")
45
46     ;; No need for these when using 'msmtp'
47     (smtpmail-smtp-user    . "username@gmail.com")
48     (smtpmail-smtp-server  . "smtp.googlemail.com")
49     (smtpmail-stream-type  . starttls)
50     (smtpmail-smtp-service . 587)
51     ...))
52
53 ;; Tell Doom's mu4e module to override some commands to fix issues on Gmail accounts
54 (setq +mu4e-gmail-accounts '(("username@gmail.com" . "/gmail-dir")))

```

7.6 IRC

```

1 ;; TODO: Not tangled
2 (defun +fetch-my-password (&rest params)
3   (require 'auth-source)
4   (let ((match (car (apply #'auth-source-search params))))
5     (if match
6       (let ((secret (plist-get match :secret)))
7         (if (functionp secret)
8             (funcall secret)
9             secret))
10      (error "Password not found for %S" params))))
11
12 (defun +my-nickserver-password (server)
13   (+fetch-my-password :user "abougouffa" :host "irc.libera.chat"))
14
15 (set-irc-server! "irc.libera.chat"
16   '(:tls t
17     :port 6697
18     :nick "abougouffa"
19     :sasl-password +my-nickserver-password
20     :channels ("#emacs")))

```

7.7 Multimedia

I like to use an MPD powered EMMS, so when I restart Emacs I do not lose my music.

7.7.1 MPD and MPC

```

1 ;; Not sure if it is required!
2 (after! mpc
3   (setq mpc-host "localhost:6600"))

```

I like to launch the music daemon mpd using Systemd, let's define some commands in Emacs to start/kill the server:

```

1 (defun +mpd-daemon-start ()
2   "Start MPD, connects to it and syncs the metadata cache."
3   (interactive)
4   (let ((mpd-daemon-running-p (+mpd-daemon-running-p)))

```

```

5  (unless mpd-daemon-running-p
6    ;; Start the daemon if it is not already running.
7    (setq mpd-daemon-running-p (zerop (call-process "systemctl" nil nil nil "--user" "start" "mpd.service"))))
8  (cond ((+mpd-daemon-running-p)
9        (+mpd-mpc-update)
10       (emms-player-mpd-connect)
11       (emms-cache-set-from-mpd-all)
12       (message "Connected to MPD!"))
13       (t
14        (warn "An error occurred when trying to start Systemd mpd.service."))))
15
16 (defun +mpd-daemon-stop ()
17   "Stops playback and kill the MPD daemon."
18   (interactive)
19   (emms-stop)
20   (call-process "systemctl" nil nil nil "--user" "stop" "mpd.service")
21   (message "MPD stopped!"))
22
23 (defun +mpd-daemon-running-p ()
24   "Check if the MPD service is running."
25   (zerop (call-process "systemctl" nil nil nil "--user" "is-active" "--quiet" "mpd.service")))
26
27 (defun +mpd-mpc-update ()
28   "Updates the MPD database synchronously."
29   (interactive)
30   (if (zerop (call-process "mpc" nil nil nil "update"))
31       (message "MPD database updated!")
32       (warn "An error occurred when trying to update MPD database.")))

```

7.7.2 EMMS

Now, we configure EMMS to use MPD if it is present; otherwise, it uses whatever default backend EMMS is using.

```

1  (after! emms
2    ;; EMMS basic configuration
3    (require 'emms-setup)
4
5    (when MPD-P
6      (require 'emms-player-mpd))
7
8    (emms-all)
9    (emms-default-players)
10
11    (setq emms-source-file-default-directory "~/Music/"
12          ;; Load cover images
13          emms-browser-covers 'emms-browser-cache-thumbnail-async
14          emms-seek-seconds 5)
15
16    (if MPD-P
17        ;; If using MPD as backend
18        (setq emms-player-list '(emms-player-mpd)
19              emms-info-functions '(emms-info-mpd)
20              emms-player-mpd-server-name "localhost"
21              emms-player-mpd-server-port "6600"
22              emms-player-mpd-music-directory (expand-file-name "~/Music"))
23        ;; Use whatever backend EMMS is using by default (VLC in my machine)
24        (setq emms-info-functions '(emms-info-tinytag))) ;; use Tinytag, or '(emms-info-exiftool) for Exiftool
25
26    ;; Keyboard shortcuts
27    (global-set-key (kbd "<XF86AudioPrev>") 'emms-previous)
28    (global-set-key (kbd "<XF86AudioNext>") 'emms-next)
29    (global-set-key (kbd "<XF86AudioPlay>") 'emms-pause)
30    (global-set-key (kbd "<XF86AudioPause>") 'emms-pause)
31    (global-set-key (kbd "<XF86AudioStop>") 'emms-stop)
32
33    ;; Try to start MPD or connect to it if it is already started.

```

```

34 (when MPD-P
35   (emms-player-set emms-player-mpd 'regex
36     (emms-player-simple-regex
37       "m3u" "ogg" "flac" "mp3" "wav" "mod" "au" "aiff"))
38   (add-hook 'emms-playlist-cleared-hook 'emms-player-mpd-clear)
39   (+mpd-daemon-start))
40
41 ;; Activate EMMS in mode line
42 (emms-mode-line 1)
43
44 ;; More descriptive track lines in playlists
45 ;; From: https://www.emacswiki.org/emacs/EMMS#h5o-15
46 (defun +better-emms-track-description (track)
47   "Return a somewhat nice track description."
48   (let ((artist (emms-track-get track 'info-artist))
49         (album (emms-track-get track 'info-album))
50         (tracknumber (emms-track-get track 'info-tracknumber))
51         (title (emms-track-get track 'info-title)))
52     (cond
53       ((or artist title)
54        (concat
55         (if (> (length artist) 0) artist "Unknown artist") ": "
56         (if (> (length album) 0) album "Unknown album") " - "
57         (if (> (length tracknumber) 0) (format "%02d. " (string-to-number tracknumber)) "")
58         (if (> (length title) 0) title "Unknown title"))))
59     (t
60      (emms-track-simple-description track))))
61
62 (setq emms-track-description-function '+better-emms-track-description)
63
64 ;; Manage notifications, inspired by:
65 ;; https://www.emacswiki.org/emacs/EMMS#h5o-9
66 ;; https://www.emacswiki.org/emacs/EMMS#h5o-11
67 (cond
68   ;; Choose D-Bus to disseminate messages, if available.
69   ((and (require 'dbus nil t) (dbus-ping :session "org.freedesktop.Notifications"))
70    (setq +emms-notifier-function '+notify-via-freedesktop-notifications)
71    (require 'notifications))
72   ;; Try to make use of KNotify if D-Bus isn't present.
73   ((and window-system (executable-find "kdialog"))
74    (setq +emms-notifier-function '+notify-via-kdialog))
75   ;; Use the message system otherwise
76   (t (setq +emms-notifier-function '+notify-via-messages)))
77
78 (setq +emms-notification-icon "/usr/share/icons/Papirus/64x64/apps/enjoy-music-player.svg")
79
80 (defun +notify-via-kdialog (title msg icon)
81   "Send notification with TITLE, MSG, and ICON via `KDialog'."
82   (call-process "kdialog"
83     nil nil nil
84     "--title" title
85     "--passivepopup" msg "5"
86     "--icon" icon))
87
88 (defun +notify-via-freedesktop-notifications (title msg icon)
89   "Send notification with TITLE, MSG, and ICON via `D-Bus'."
90   (notifications-notify
91    :title title
92    :body msg
93    :app-icon icon
94    :urgency 'low))
95
96 (defun +notify-via-messages (title msg icon)
97   "Send notification with TITLE, MSG to message. ICON is ignored."
98   (message "%s %s" title msg))
99
100 (add-hook 'emms-player-started-hook
101   (lambda () (funcall +emms-notifier-function
102     "EMMS is now playing:"
103     (emms-track-description (emms-playlist-current-selected-track))

```

```
+emms-notification-icon))))
```

7.7.3 EMPV

```
(package! empv
:recipe (:host github
:repo "isamert/empv.el"))
```

```
(use-package! empv
:when MPV-P
:init
(map! :leader :prefix ("l m")
(:prefix ("v" . "empv")
:desc "Play" "p" #'empv-play
:desc "Seach Youtube" "y" #'consult-empv-youtube
:desc "Play radio" "r" #'empv-play-radio
:desc "Save current playlist" "s" #'empv-save-playlist-to-file))
:config
;; See https://docs.invidious.io/instances/
(setq empv-invidious-instance "https://invidious.projectsegfau.lt/api/v1"
empv-audio-dir "~/Music"
empv-video-dir "~/Videos"
empv-max-directory-search-depth 6
empv-radio-log-file (expand-file-name "logged-radio-songs.org" org-directory)
;; Links from https://www.radio-browser.info
empv-radio-channels
'(("El-Bahdja FM" . "http://webradio.tda.dz:8001/ElBahdja_64K.mp3")
("El-Chaabia" . "https://radio-dzair.net/proxy/chaabia?mp=/stream")
("Quran Radio" . "http://stream.radiojar.com/Otpy1h0kxtzuv")
("Algeria International" . "https://webradio.tda.dz/Internationale_64K.mp3")
("JOW Radio" . "https://str0.creacast.com/jowradio")
("Europe1" . "http://ais-live.cloud-services.paris:8000/europe1.mp3")
("France Iter" . "http://direct.franceinter.fr/live/franceinter-hifi.aac")
("France Info" . "http://direct.franceinfo.fr/live/franceinfo-midfi.mp3")
("France Culture" . "http://icecast.radiofrance.fr/franceculture-hifi.aac")
("France Musique" . "http://icecast.radiofrance.fr/francemusique-hifi.aac")
("FIP" . "http://icecast.radiofrance.fr/fip-hifi.aac")
("Beur FM" . "http://broadcast.infomaniak.ch/beurfm-high.aac")
("Skyrock" . "http://icecast.skyrock.net/s/natio_mp3_128k"))))

(empv-playlist-loop-on)

;; Hacky palylist management (only supports saving playlist,
;; loading a playlist can be achieved using `empv-play-file')

(defvar +empv-playlist-dir empv-audio-dir)

;; Only for internal usage with `empv--cmd' call backs
(defvar empv---pl-cb)
(defvar empv---pl-curr)
(defvar empv---pl-count)
(defvar empv---pl-playlist)

(defun +empv-get-current-playlist (&optional cb &rest args)
(when (empv--running?)
(setq empv---pl-playlist nil
empv---pl-cb (cons cb args))
(empv--cmd
'get_property 'playlist/count
(setq empv---pl-curr 0
empv---pl-count it)
(dotimes (i it)
(empv--cmd
'get_property (intern (format "playlist/%d/filename" i))
(add-to-list 'empv---pl-playlist it)
```



```

58     (setq empv---pl-curr (1+ empv---pl-curr))
59     (when (and (eq empv---pl-count empv---pl-curr)
60               (fboundp (car empv---pl-cb)))
61       ;; Call on the last element
62       (apply (car empv---pl-cb) empv---pl-playlist (cdr empv---pl-cb))))))
63
64 (defun +empv-save-playtlist-to-file (path)
65   (interactive "FSave playlist to: ")
66   (+empv-get-current-playlist #' +empv--save-playlist-to-file path))
67
68 (defun +empv--save-playlist-to-file (playlist &optional filename)
69   (with-temp-buffer
70     (insert (+str-join "\n" playlist))
71     (let* ((last-pl (file-name-sans-extension (car (last (directory-files +empv-playlist-dir nil
↪ "empv-playlist-\\([[:digit:]]+\\)\\.m3u")))))
72            (num (if (null last-pl) 0 (1+ (string-to-number (car (last (+str-split last-pl "-"))))))))
73            (filename (or filename (expand-file-name (format "empv-playlist-%d.m3u" num) +empv-playlist-dir))))
74            ;; (if (file-exists-p filename)
75            ;;      (append-to-file (point-min) (point-max) filename)
76            (write-file filename))))

```

7.7.4 Keybindings

Lastly, let's define the keybindings for these commands, under <leader> l m.

```

1 (map! :leader :prefix ("l" . "custom")
2   (:when (modulep! :app emms)
3     :prefix ("m" . "media")
4     :desc "Playlist go" "g" #'emms-playlist-mode-go
5     :desc "Add playlist" "D" #'emms-add-playlist
6     :desc "Toggle random playlist" "r" #'emms-toggle-random-playlist
7     :desc "Add directory" "d" #'emms-add-directory
8     :desc "Add file" "f" #'emms-add-file
9     :desc "Smart browse" "b" #'emms-smart-browse
10    :desc "Play/Pause" "p" #'emms-pause
11    :desc "Start" "S" #'emms-start
12    :desc "Stop" "s" #'emms-stop))

```

Then we add MPD related keybindings if MPD is used.

```

1 (map! :leader :prefix ("l m")
2   (:when (and (modulep! :app emms) MPD-P)
3     :prefix ("m" . "mpd/mpc")
4     :desc "Start daemon" "s" #' +mpd-daemon-start
5     :desc "Stop daemon" "k" #' +mpd-daemon-stop
6     :desc "EMMS player (MPD update)" "R" #'emms-player-mpd-update-all-reset-cache
7     :desc "Update database" "u" #' +mpd-mpc-update))

```

7.7.5 Cycle song information in mode line

I found a useful package named `emms-mode-line-cycle` which permits to do this; however, it has not been updated since a while, it uses some obsolete functions to draw icon in mode line, so I forked it, got rid of the problematic parts, and added some minor stuff.

```

1 (package! emms-mode-line-cycle
2   :recipe (:host github
3     :repo "abougouffa/emms-mode-line-cycle"))

```

```

1 (use-package! emms-mode-line-cycle
2   :after emms
3   :config

```

```

4 (setq emms-mode-line-cycle-max-width 15
5       emms-mode-line-cycle-additional-space-num 4
6       emms-mode-line-cycle-any-width-p nil
7       emms-mode-line-cycle-velocity 4)
8
9 ;; Some music files do not have metadata, by default, the track title
10 ;; will be the full file path, so, if I detect what seems to be an absolute
11 ;; path, I trim the directory part and get only the file name.
12 (setq emms-mode-line-cycle-current-title-function
13       (lambda ()
14         (let ((name (emms-track-description (emms-playlist-current-selected-track))))
15           (if (file-name-absolute-p name) (file-name-base name) name))))
16
17 ;; Mode line formatting settings
18 ;; This format complements the 'emms-mode-line-format' one.
19 (setq emms-mode-line-format " %s " ;;
20       ;; To hide the playing time without stopping the cycling.
21       emms-playing-time-display-format "")
22
23 (defun +emms-mode-line-toggle-format-hook ()
24   "Toggle the 'emms-mode-line-format' string, when playing or paused."
25   (setq emms-mode-line-format (concat " " (if emms-player-paused-p " " " ") " %s "))
26   ;; Force a sync to get the right song name over MPD in mode line
27   (when MPD-P (emms-player-mpd-sync-from-mpd))
28   ;; Trigger a forced update of mode line (useful when pausing)
29   (emms-mode-line-alter-mode-line))
30
31 ;; Hook the function to the 'emms-player-paused-hook'
32 (add-hook 'emms-player-paused-hook '+emms-mode-line-toggle-format-hook)
33
34 (emms-mode-line-cycle 1))

```

7.8 Maxima

The Maxima CAS comes bundled with three Emacs modes: `maxima`, `imaxima` and `emaxima`; installed by default in `"/usr/share/emacs/site-lisp/maxima"`.

7.8.1 Maxima

The `emacs-mirror/maxima` seems more up-to-date, and supports completion via `Company`, so let's install it from GitHub. Note that, normally, we don't need to specify a recipe; however, installing it directly seems to not install `company-maxima.el` and `poly-maxima.el`.

```

1 (package! maxima
2   :recipe (:host github
3           :repo "emacs-mirror/maxima"
4           :files (:defaults
5                  "keywords"
6                  "company-maxima.el"
7                  "poly-maxima.el")))

```

```

1 (use-package! maxima
2   :when MAXIMA-P
3   :commands (maxima-mode maxima-inferior-mode maxima)
4   :init
5   (require 'straight) ;; to use `straight-build-dir' and `straight-base-dir'
6   (setq maxima-font-lock-keywords-directory ;; a workaround to undo the straight workaround!
7         (expand-file-name (format "straight/%s/maxima/keywords" straight-build-dir) straight-base-dir))
8
9   ;; The `maxima-hook-function' setup `company-maxima'.
10  (add-hook 'maxima-mode-hook #'maxima-hook-function)
11  (add-hook 'maxima-inferior-mode-hook #'maxima-hook-function)
12  (add-to-list 'auto-mode-alist '("\\.ma[cs]$" . maxima-mode)))

```

7.8.2 IMaxima

For the `imaxima` (Maxima with image support), the `emacsattic/imaxima` seems outdated compared to the `imaxima` package of the official Maxima distribution, so let's install `imaxima` from the source code of Maxima, hosted on Sourceforge `git.code.sf.net/p/maxima/code`. The package files are stored in the repository's subdirectory `interfaces/emacs/imaxima`.

```

1 ;; Use the `imaxima' package bundled with the official Maxima distribution.
2 (package! imaxima
3   :recipe (:host nil ;; Unsupported host, we will specify the complete repo link
4           :repo "https://git.code.sf.net/p/maxima/code"
5           :files ("interfaces/emacs/imaxima/*")))

1 (use-package! imaxima
2   :when MAXIMA-P
3   :commands (imaxima imath-mode)
4   :init
5   (setq imaxima-use-maxima-mode-flag nil ;; otherwise, it don't render equations with LaTeX.
6         imaxima-scale-factor 2.0)
7
8   ;; Hook the `maxima-inferior-mode' to get Company completion.
9   (add-hook 'imaxima-startup-hook #'maxima-inferior-mode))

```

7.9 FriCAS

The FriCAS comes bundled with an Emacs mode, let's load it.

```

1 (use-package! fricas
2   :when FRICAS-P
3   :load-path "/usr/lib/fricas/emacs"
4   :commands (fricas-mode fricas-eval fricas))

```

8 Programming

8.1 File templates

For some file types, we can overwrite the defaults in the snippets' directory.

```

1 (set-file-template! "\\\\.tex$" :trigger "__" :mode 'latex-mode)
2 (set-file-template! "\\\\.org$" :trigger "__" :mode 'org-mode)
3 (set-file-template! "/LICEN[CS]E$" :trigger '+file-templates/insert-license)

```

8.2 CSV rainbow

Stolen from here.

```

1 (after! csv-mode
2   ;; TODO: Need to fix the case of two commas, example "a,b,,c,d"
3   (require 'cl-lib)
4   (require 'color)
5
6   (map! :localleader
7         :map csv-mode-map
8         "R" #'csv-rainbow)
9
10  (defun +csv-rainbow (&optional separator)
11    (interactive (list (when current-prefix-arg (read-char "Separator: "))))

```

```

12 (font-lock-mode 1)
13 (let* ((separator (or separator ?\,))
14        (n (count-matches (string separator) (point-at-bol) (point-at-eol))))
15        (colors (cl-loop for i from 0 to 1.0 by (/ 2.0 n)
16                        collect (apply #'color-rgb-to-hex
17                                      (color-hsl-to-rgb i 0.3 0.5)))))
18        (cl-loop for i from 2 to n by 2
19                  for c in colors
20                  for r = (format "~\\([~%c\\n]+%c\\)\\{d\\}" separator separator i)
21                  do (font-lock-add-keywords nil `((,r (1 '(face (:foreground ,c))))))))
22
23 ;; provide CSV mode setup
24 ;; (add-hook 'csv-mode-hook (lambda () (+csv-rainbow)))

```

8.3 Vim

```

1 (package! vimrc-mode
2   :recipe (:host github
3           :repo "mcandre/vimrc-mode"))

```

```

1 (use-package! vimrc-mode
2   :mode "\\\\.vim\\(rc\\)?\\'")

```

8.4 ESS

View data frames better with

```

1 (package! ess-view)

```

8.5 Python IDE

```

1 (package! elpy)

```

```

1 (use-package! elpy
2   :hook ((elpy-mode . flycheck-mode)
3         (elpy-mode . (lambda ()
4                         (set (make-local-variable 'company-backends)
5                             '((elpy-company-backend :with company-yasnippet))))))
6   :config
7   ;;:init
8   (elpy-enable))

```

8.6 GNU Octave

Files with the .m extension gets recognized automatically as Objective-C files. I've never used Objective-C before, so let's change it to be recognized as Octave/Matlab files.

```

1 (add-to-list 'auto-mode-alist '("\\\\.m\\'" . octave-mode))

```

```

1 (defun +octave-eval-last-sexp ()
2   "Evaluate Octave sexp before point and print value into current buffer."
3   (interactive)
4   (inferior-octave t)
5   (let ((print-escape-newlines nil)
6         (opoint (point)))
7     (prin1
8      (save-excursion
9        (forward-sexp -1)
10        (inferior-octave-send-list-and-digest
11         (list (concat (buffer-substring-no-properties (point) opoint)
12                      "\n"))))
13      (mapconcat 'identity inferior-octave-output-list "\n")))))
14
15 (defun +eros-octave-eval-last-sexp ()
16   "Wrapper for `+octave-eval-last-sexp' that overlays results."
17   (interactive)
18   (eros--eval-overlay
19    (octave-eval-last-sexp)
20    (point)))
21
22 (map! :localleader
23      :map (octave-mode-map)
24      (:prefix ("e" . "eval")
25              :desc "Eval and print last sexp" "e" #' +eros-octave-eval-last-sexp))

```

8.7 ROS

8.7.1 Extensions

Add ROS specific file formats:

```

1 (add-to-list 'auto-mode-alist '("\\.rviz\\") . conf-unix-mode))
2 (add-to-list 'auto-mode-alist '("\\.urdf\\") . xml-mode))
3 (add-to-list 'auto-mode-alist '("\\.xacro\\") . xml-mode))
4 (add-to-list 'auto-mode-alist '("\\.launch\\") . xml-mode))
5
6 ;; Use gdb-script-mode for msg and srv files
7 (add-to-list 'auto-mode-alist '("\\.msg\\") . gdb-script-mode))
8 (add-to-list 'auto-mode-alist '("\\.srv\\") . gdb-script-mode))
9 (add-to-list 'auto-mode-alist '("\\.action\\") . gdb-script-mode))

```

8.7.2 ROS bags

Mode to view ROS .bag files. Taken from code-iai/ros_emacs_utils.

```

1 (when ROSBAG-P
2   (define-derived-mode rosbag-view-mode
3     fundamental-mode "Rosbag view mode"
4     "Major mode for viewing ROS bag files."
5     (let ((f (buffer-file-name)))
6       (let ((buffer-read-only nil))
7         (erase-buffer)
8         (message "Calling rosbag info")
9         (call-process "rosbag" nil (current-buffer) nil
10                      "info" f)
11         (set-buffer-modified-p nil))
12     (view-mode)
13     (set-visited-file-name nil t)))
14
15 ;; rosbag view mode
16 (add-to-list 'auto-mode-alist '("\\.bag$" . rosbag-view-mode)))

```

8.7.3 ros.el

I found this awesome `ros.el` package made by Max Beutelspacher, which facilitate working with ROS machines, supports ROS1 and ROS2, with local workspaces or remote ones (over Trump!).

```
1 ;; `ros.el' depends on `with-shell-interpreter' among other packages
2 ;; See: https://github.com/DerBeutlin/ros.el/blob/master/Cask
3 (package! with-shell-interpreter)
4 (package! ros
5   :recipe (:host github
6            :repo "DerBeutlin/ros.el"))
```

Now, we configure the ROS1/ROS2 workspaces to work on. But before that, we need to install some tools on the ROS machine, and build the workspace for the first time using `colcon build`, the repository contains example Docker files for Noetic and Foxy.

```
1 (use-package! ros
2   :init
3   (map! :leader
4         :prefix ("l" . "custom")
5         :desc "Hydra ROS" "r" #'hydra-ros-main/body)
6   :commands (hydra-ros-main/body ros-set-workspace)
7   :config
8   (setq ros-workspaces
9         (list (ros-dump-workspace
10                :tramp-prefix (format "/docker:%s@%s:" "ros" "ros-machine")
11                :workspace "~/ros_ws"
12                :extends '("/opt/ros/noetic/"))
13              (ros-dump-workspace
14                :tramp-prefix (format "/ssh:%s@%s:" "swd_sk" "172.16.96.42")
15                :workspace "~/ros_ws"
16                :extends '("/opt/ros/noetic/"))
17              (ros-dump-workspace
18                :tramp-prefix (format "/ssh:%s@%s:" "swd_sk" "172.16.96.42")
19                :workspace "~/ros2_ws"
20                :extends '("/opt/ros/foxy/"))))))
```

8.8 Scheme

```
1 (after! geiser
2   (setq geiser-default-implementation 'guile
3         geiser-chez-binary "chez-scheme")) ;; default is "scheme"
```

8.9 Embedded systems

8.9.1 Embed.el

Some embedded systems development tools.

TODO: Try to integrate embedded debuggers adapters with `dap-mode`:

- probe-rs-debugger
- stm32-emacs
- cortex-debug with potential integration with DAP
- esp-debug-adapter

```
1 (package! embed
2   :recipe (:host github
3            :repo "sjsch/embed-el"))
```

```

1 (use-package! embed
2   :commands (embed-openocd-start
3               embed-openocd-stop
4               embed-openocd-gdb
5               embed-openocd-flash)
6
7   :init
8   (map! :leader :prefix ("l" . "custom")
9         (:when (modulep! :tools debugger +lsp)
10              :prefix ("e" . "embedded")
11              :desc "Start OpenOCD"      "o" #'embed-openocd-start
12              :desc "Stop OpenOCD"       "O" #'embed-openocd-stop
13              :desc "OpenOCD GDB"        "g" #'embed-openocd-gdb
14              :desc "OpenOCD flash"      "f" #'embed-openocd-flash)))

```

8.9.2 Arduino

```

1 (package! arduino-mode
2   :recipe (:host github
3           :repo "bookest/arduino-mode"))

```

8.9.3 Bitbake (Yocto)

Add support for Yocto Project files.

```

1 (package! bitbake-modes
2   :recipe (:host bitbucket
3           :repo "olaniilsson/bitbake-modes"))

```

```

1 (use-package! bitbake-modes
2   :commands (wks-mode
3               mmm-mode
4               bb-sh-mode
5               bb-scc-mode
6               bitbake-mode
7               conf-bitbake-mode
8               bitbake-task-log-mode))

```

8.10 Debugging

8.10.1 DAP

I like to use `cpptools` over `webfreak.debug`. So I enable it after loading `dap-mode`. I like also to have a mode minimal UI. And I like to trigger `dap-hydra` when the program hits a break point, and automatically delete the session and close Hydra when DAP is terminated.

```

1 (unpin! dap-mode)

1 (after! dap-mode
2   ;; Set latest versions
3   (setq dap-cpptools-extension-version "1.11.5")
4   (require 'dap-cpptools)
5
6   (setq dap-codelldb-extension-version "1.7.4")
7   (require 'dap-codelldb)
8

```

```

9  (setq dap-gdb-lldb-extension-version "0.26.0")
10 (require 'dap-gdb-lldb)
11
12 ;; More minimal UI
13 (setq dap-auto-configure-features '(breakpoints locals expressions tooltip)
14       dap-auto-show-output nil ;; Hide the annoying server output
15       lsp-enable-dap-auto-configure t)
16
17 ;; Automatically trigger dap-hydra when a program hits a breakpoint.
18 (add-hook 'dap-stopped-hook (lambda (arg) (call-interactively #'dap-hydra)))
19
20 ;; Automatically delete session and close dap-hydra when DAP is terminated.
21 (add-hook 'dap-terminated-hook
22           (lambda (arg)
23             (call-interactively #'dap-delete-session)
24             (dap-hydra/nil)))
25
26 ;; A workaround to correctly show breakpoints
27 ;; from: https://github.com/emacs-lsp/dap-mode/issues/374#issuecomment-1140399819
28 (add-hook! +dap-running-session-mode
29           (set-window-buffer nil (current-buffer))))

```

Doom store Doom Emacs stores session information persistently using the core `store` mechanism. However, relaunching a new session doesn't overwrite the last stored session, to do so, I define a helper function to clear data stored in the `"debugger"` location. (see `+debugger--get-last-config` function.)

```

1  (defun +debugger/clear-last-session ()
2    "Clear the last stored session"
3    (interactive)
4    (doom-store-clear "+debugger"))
5
6  (map! :leader :prefix ("l" . "custom")
7        (:when (modulep! :tools debugger +lsp)
8              :prefix ("d" . "debugger")
9              :desc "Clear last DAP session" "c" #' +debugger/clear-last-session))

```

8.10.2 RealGUD

For C/C++, DAP mode is missing so much features. In my experience, both `cpptools` and `gdb` DAP interfaces aren't mature, it stops and disconnect while debugging, making it a double pain.

Additional commands There is no better than using pure GDB, it makes debugging extremely flexible. Let's define some missing GDB commands, add them to Hydra keys, and define some reverse debugging commands for usage with `rr` (which we can use by substituting `gdb` by `rr replay` when starting a debug session).

```

1  (after! realgud
2    (require 'hydra)
3
4    ;; Add some missing gdb/rr commands
5    (defun +realgud:cmd-start (arg)
6      "start = break main + run"
7      (interactive "p")
8      (realgud-command "start"))
9
10   (defun +realgud:cmd-reverse-next (arg)
11     "Reverse next"
12     (interactive "p")
13     (realgud-command "reverse-next"))
14
15   (defun +realgud:cmd-reverse-step (arg)
16     "Reverse step"
17     (interactive "p"))

```



```

18 (realgud-command "reverse-step"))
19
20 (defun +realgud:cmd-reverse-continue (arg)
21   "Reverse continue"
22   (interactive "p")
23   (realgud-command "reverse-continue"))
24
25 (defun +realgud:cmd-reverse-finish (arg)
26   "Reverse finish"
27   (interactive "p")
28   (realgud-command "reverse-finish"))
29
30 ;; Define a hydra binding
31 (defhydra realgud-hydra (:color pink :hint nil :foreign-keys run)
32   "
33   Stepping | _n_: next      | _i_: step   | _o_: finish | _c_: continue | _R_: restart | _u_:
↪ until-here
34   Revese   | _rn_: next      | _ri_: step   | _ro_: finish | _rc_: continue |
35   Breakpts | _ba_: break     | _bd_: delete | _bt_: tbreak | _bd_: disable | _be_: enable | _tr_:
↪ backtrace
36   Eval      | _ee_: at-point  | _er_: region | _eE_: eval   |
37             | _!_: shell      | _Qk_: kill   | _Qq_: quit   | _Sg_: gdb     | _Ss_: start
38   "
39   ("n" realgud:cmd-next)
40   ("i" realgud:cmd-step)
41   ("o" realgud:cmd-finish)
42   ("c" realgud:cmd-continue)
43   ("R" realgud:cmd-restart)
44   ("u" realgud:cmd-until-here)
45   ("rn" +realgud:cmd-reverse-next)
46   ("ri" +realgud:cmd-reverse-step)
47   ("ro" +realgud:cmd-reverse-finish)
48   ("rc" +realgud:cmd-reverse-continue)
49   ("ba" realgud:cmd-break)
50   ("bt" realgud:cmd-tbreak)
51   ("bD" realgud:cmd-delete)
52   ("be" realgud:cmd-enable)
53   ("bd" realgud:cmd-disable)
54   ("ee" realgud:cmd-eval-at-point)
55   ("er" realgud:cmd-eval-region)
56   ("tr" realgud:cmd-backtrace)
57   ("eE" realgud:cmd-eval)
58   ("!" realgud:cmd-shell)
59   ("Qk" realgud:cmd-kill)
60   ("Sg" realgud:gdb)
61   ("Ss" +realgud:cmd-start)
62   ("q" nil "quit" :color blue) ;; :exit
63   ("Qq" realgud:cmd-quit :color blue)) ;; :exit
64
65 (defun +debugger/realgud:gdb-hydra ()
66   "Run `realgud-hydra'."
67   (interactive)
68   (realgud-hydra/body))
69
70 (map! :leader :prefix ("l" . "custom")
71   (:when (modulep! :tools debugger)
72     :prefix ("d" . "debugger")
73     :desc "RealGUD hydra" "h" #' +debugger/realgud:gdb-hydra)))

```

Record and replay rr We then add some shortcuts to run `rr` from Emacs, the `rr record` takes the program name and arguments from my local `+realgud-debug-config`, when `rr replay` respects the arguments configured in RealGUD's GDB command name. Some useful hints could be found [here](#), [here](#), [here](#) and [here](#).

```

1 (after! realgud
2   (defun +debugger/rr-replay ()
3     "Launch `rr replay'."
4     (interactive)

```

```

5 (realgud:gdb (+str-replace "gdb" "rr replay" realgud:gdb-command-name)))
6
7 (defun +debugger/rr-record ()
8   "Launch `rr record' with parameters from launch.json or `+launch-json-debug-config'."
9   (interactive)
10  (let* ((conf (launch-json--config-choice))
11         (args (launch-json--substitute-special-vars (plist-get conf :program) (plist-get conf :args))))
12    (unless (make-process :name "rr-record"
13                        :buffer "*rr record*"
14                        :command (append '("rr" "record") args))
15      (message "Cannot start the 'rr record' process"))))
16
17 (map! :leader :prefix ("l" . "custom")
18      (:when (modulep! :tools debugger)
19        :prefix ("d" . "debugger")
20        :desc "rr record" "r" #' +debugger/rr-record
21        :desc "rr replay" "R" #' +debugger/rr-replay)))

```

```

1 (package! realgud-lldb)
2 (package! realgud-ipdb)
3 (package! realgud-trepan-xpy :recipe (:host github :repo "realgud/trepan-xpy"))
4 (package! realgud-maxima :recipe (:host github :repo "realgud/realgud-maxima"))

```

Additional debuggers for RealGUD

8.10.3 GDB

Emacs GDB *a.k.a.* gdb-mi DAP mode is great, however, it is not mature for C/C++ debugging, it does not support some basic features like *Run until cursor*, *Show disassembled code*, etc. Emacs have builtin **gdb** support through **gdb-mi** and **gud-gdb**.

The **emacs-gdb** package overwrites the builtin **gdb-mi**, it is much faster (thanks to it's C module), and it defines some easy to use UI, with Visual Studio like keybindings.

```

1 (package! gdb-mi
2   :disable t
3   :recipe (:host github
4             :repo "weirdNox/emacs-gdb"
5             :files ("*.el" "*.c" "*.h" "Makefile")))

```

```

1 (use-package! gdb-mi
2   :init
3   (fmakunbound 'gdb)
4   (fmakunbound 'gdb-enable-debug)
5
6   :config
7   (setq gdb-window-setup-function #'gdb--setup-windows ;; TODO: Customize this
8         gdb-ignore-gdbinit nil) ;; I use gdbinit to define some useful stuff
9   ;; History
10  (defvar +gdb-history-file "~/gdb_history")
11  (defun +gud-gdb-mode-hook-setup ()
12    "GDB setup."
13
14    ;; Suposes "~/gdbinit" contains:
15    ;; set history save on
16    ;; set history filename ~/.gdb_history
17    ;; set history remove-duplicates 2048
18    (when (and (ring-empty-p comint-input-ring)
19              (file-exists-p +gdb-history-file))
20      (setq comint-input-ring-file-name +gdb-history-file)
21      (comint-read-input-ring t)))

```

```
(add-hook 'gud-gdb-mode-hook '+gud-gdb-mode-hook-setup))
```

Custom layout for gdb-many-windows Stolen from <https://stackoverflow.com/a/41326527/3058915>. I used it to change the builtin gdb-many-windows layout.

```
(setq gdb-many-windows nil)

(defun set-gdb-layout(&optional c-buffer)
  (if (not c-buffer)
      (setq c-buffer (window-buffer (selected-window)))) ;; save current buffer

  ;; from http://stackoverflow.com/q/39762833/846686
  (set-window-dedicated-p (selected-window) nil) ;; unset dedicate state if needed
  (switch-to-buffer gud-comint-buffer)
  (delete-other-windows) ;; clean all

  (let* ((w-source (selected-window)) ;; left top
         (w-gdb (split-window w-source nil 'right)) ;; right bottom
         (w-locals (split-window w-gdb nil 'above)) ;; right middle bottom
         (w-stack (split-window w-locals nil 'above)) ;; right middle top
         (w-breakpoints (split-window w-stack nil 'above)) ;; right top
         (w-io (split-window w-source (floor(* 0.9 (window-body-height))) 'below))) ;; left bottom
    (set-window-buffer w-io (gdb-get-buffer-create 'gdb-inferior-io))
    (set-window-dedicated-p w-io t)
    (set-window-buffer w-breakpoints (gdb-get-buffer-create 'gdb-breakpoints-buffer))
    (set-window-dedicated-p w-breakpoints t)
    (set-window-buffer w-locals (gdb-get-buffer-create 'gdb-locals-buffer))
    (set-window-dedicated-p w-locals t)
    (set-window-buffer w-stack (gdb-get-buffer-create 'gdb-stack-buffer))
    (set-window-dedicated-p w-stack t)

    (set-window-buffer w-gdb gud-comint-buffer)

    (select-window w-source)
    (set-window-buffer w-source c-buffer)))

(defadvice gdb (around args activate)
  "Change the way to gdb works."
  (setq global-config-editing (current-window-configuration)) ;; to restore: (set-window-configuration c-editin
g)
  (let ((c-buffer (window-buffer (selected-window)))) ;; save current buffer
    ad-do-it
    (set-gdb-layout c-buffer)))

(defadvice gdb-reset (around args activate)
  "Change the way to gdb exit."
  ad-do-it
  (set-window-configuration global-config-editing))
```

```
(defvar gud-overlay
  (let* ((ov (make-overlay (point-min) (point-min))))
    (overlay-put ov 'face 'secondary-selection)
    ov)
  "Overlay variable for GUD highlighting.")

(defadvice gud-display-line (after my-gud-highlight act)
  "Highlight current line."
  (let* ((ov gud-overlay)
         (bf (gud-find-file true-file)))
    (with-current-buffer bf
      (move-overlay ov (line-beginning-position) (line-beginning-position 2))
```

```

13         ;; (move-overlay ov (line-beginning-position) (line-end-position)
14         (current-buffer))))))
15
16 (defun gud-kill-buffer ()
17   (if (derived-mode-p 'gud-mode)
18       (delete-overlay gud-overlay)))
19
20 (add-hook 'kill-buffer-hook 'gud-kill-buffer)

```

Highlight current line

8.10.4 WIP launch.json support for GUD and RealGUD

I do a lot of development on C/C++ apps that gets data from command line arguments, which means I have to type my arguments manually after calling `realgud:gdb`, which is very annoying.

For DAP mode, there is a support for either `dap-debug-edit-template`, or `launch.json`. For GUD/RealGUD though, I didn't find any ready-to-use feature like this. So let's code it!

I like to define a variable named `+launch-json-debug-config` to use as a fallback, if no `launch.json` file is present.

```

1  ;; A variable which to be used in .dir-locals.el, formatted as a list of plists;
2  ;; '(:program "...":args ("args1" "arg2" ...))
3  (defvar +launch-json-debug-config nil)

```

This variable should have the same structure of a `launch.json` file, in Emacs, it should be a *list of plists*, each *plist* represents a configuration, this variable can be set in `.dir-locals.el` for example.

The configuration plists supports some of `launch.json` parameters, including:

- `:name` a description of the debug configuration;
- `:type` which debugger to use;
- `:program` the path of the debuggee program;
- `:args` a list of string arguments to pass to the debuggee program.

The variable `+launch-json-debug-config` can be set in a per-project basis thanks to `.dir-locals.el`, something like this:

```

1  ;; Example entry in .dir-locals.el
2  ((nil . ((+launch-json-debug-config . '(:name "Debug my_prog with csv data"
3      :type "realgud:gdb" ;; One config with `realgud:gdb'
4      :program "${workspaceFolder}/build/bin/my_prog"
5      :args ("--in_file=${workspaceFolder}/some/file.csv"
6          "--some-parameter" "-a" "-b"
7          "--out_file=/tmp/some_randome_file"
8          "-a")))
9      (:name "Debug my_prog with options '-a' and '-b'"
10       :type "gdb-mi" ;; Another config with `gdb-mi'
11       :program "${workspaceFolder}/build/bin/my_prog"
12       :args ("-a" "-b")))))

```

The list of implemented special variables are listed in the table below, they have been defined as specified in VS Code.

Variable	Example
userHome	/home/username
workspaceFolder	/home/username/your-project
workspaceFolderBasename	your-project
file	/home/username/your-project/folder/file.cc
fileWorkspaceFolder	/home/username/your-project
relativeFile	folder/file.cc
relativeFileDirname	folder
fileBasename	file.cc
fileBasenameNoExtension	file
fileDirname	/home/username/your-project/folder
fileExtname	.cc
lineNumber	Line number of the cursor
selectedText	Text selected in your code editor
pathSeparator	Returns / on *nix, and \ on Windows

If a `launch.json` file is detected in the project directory, it gets read and searches for a configuration for the `realgud:gdb` debugger. So you need to have a section with type `realgud:gdb`. This is an example of a valid `launch.json` file.

```

1 {
2   "version": "0.2.0",
3   "configurations": [
4     {
5       "name": "Emacs::RealGUD:GDB (view_trajectory)",
6       "type": "realgud:gdb",
7       "request": "launch",
8       "dap-compilation": "cmake --build build/debug -- -j 8",
9       "dap-compilation-dir": "${workspaceFolder}",
10      "program": "${workspaceFolder}/build/debug/bin/view_trajectory",
11      "args": [
12        "${workspaceFolder}/data/seq1/h_poses.csv",
13        "${workspaceFolder}/data/seq1/poses.csv"
14      ],
15      "stopAtEntry": false,
16      "cwd": "${workspaceFolder}",
17      "environment": [],
18      "externalConsole": false
19    }
20  ]
21 }
```

The example above defines several parameters, however, only `type`, `program` and `args` are used at the moment.

```

1 (defvar launch-json--gud-debugger-regex
2   (rx (seq bol (group-n 1 (or "gdb" "gud-gdb" "perlldb" "pdb" "jdb" "guiler" "dbx" "sdb" "xdb") eol))))
3
4 (defvar launch-json--realgud-debugger-regex
5   (rx (seq bol (or (seq "realgud:" (group-n 1 (or "gdb" "pdb"
6     "bashdb" "kshdb" "zshd"
7     "perlldb" "rdebug" "remake"
8     "trepan" "trepan2" "trepan3k" "trepanjs" "trepan.pl"))))
9     (seq "realgud-" (group-n 1 (or "gub"))))
10    ;; Additional debuggers
11    (seq "realgud:" (group-n 1 (or "xdebug" "pry" "jdb" "ipdb" "trepan-xpy" "trepan-ni"
12      ↪ "node-inspect"))))
13    ;; `realgud-lldb' defines the debug command as `realgud--lldb',
14    ;; We accept both `realgud:lldb' and `realgud--lldb' in the config
15    (seq "realgud" (or ":" "--") (group-n 1 (or "lldb")))) eol)))
16
17 ;; Define aliases for realgud-lldb
18 (with-eval-after-load 'realgud-lldb
19   (defalias 'realgud:lldb 'realgud--lldb))
```

```

19 (defalias 'realgud:lldb-command-name 'realgud--lldb-command-name))
20
21 ;; Define aliases for realgud-ipdb
22 (with-eval-after-load 'realgud-ipdb
23   (defalias 'realgud:ipdb-command-name 'realgud--ipdb-command-name))
24
25 (defvar launch-json--last-config nil)
26
27 (defun launch-json-last-config-clear ()
28   (interactive)
29   (setq-local launch-json--last-config nil))
30
31 (defun launch-json--substitute-special-vars (program &optional args)
32   "Substitute variables in PROGRAM and ARGS.
33   Return a list, in which processed PROGRAM is the first element, followed by ARGS."
34   (let* ((curr-file (ignore-errors (expand-file-name (buffer-file-name))))
35          (ws-root (string-trim-right
36                    (expand-file-name
37                      (or (projectile-project-root)
38                          (ignore-errors (file-name-directory curr-file))
39                          ".")
40                      "/"))
41          (ws-basename (file-name-nondirectory ws-root)))
42   ;; Replace special variables
43   (mapcar
44     (lambda (str)
45       (+str-replace-all
46         (append
47           (list
48             (cons "${workspaceFolder}" ws-root)
49             (cons "${workspaceFolderBasename}" ws-basename)
50             (cons "${userHome}" (or (getenv "HOME") (expand-file-name "~")))
51             (cons "${pathSeparator}" (if (memq system-type
52                                             '(windows-nt ms-dos cygwin))
53                                           "\\\" "/""))
54             (cons "${selectedText}" (if (use-region-p)
55                                           (buffer-substring-no-properties
56                                             (region-beginning) (region-end)) "")))
56         ;; To avoid problems if launched from a non-file buffer
57         (when curr-file
58           (list
59             (cons "${file}" curr-file)
60             (cons "${relativeFile}" (file-relative-name curr-file ws-root))
61             (cons "${relativeFileDirname}" (file-relative-name
62                                              (file-name-directory curr-file) ws-root))
63             (cons "${fileBasename}" (file-name-nondirectory curr-file))
64             (cons "${fileBasenameNoExtension}" (file-name-base curr-file))
65             (cons "${fileDirname}" (file-name-directory curr-file))
66             (cons "${fileExtname}" (file-name-extension curr-file))
67             (cons "${lineNumber}" (line-number-at-pos (point) t))))
68         str))
69     (cons program args))))
70
71 (defun launch-json--debugger-params (type)
72   (let* ((front/backend
73          (cond ((string-match launch-json--realgud-debugger-regex type)
74                 (cons 'realgud (intern (match-string 1 type))))
75                ((string-match launch-json--gud-debugger-regex type)
76                 (cons 'gud (intern (match-string 1 type))))
77                (t
78                 (cons 'unknown 'unknown)))))
79          (frontend (car front/backend))
80          (backend (cdr front/backend))
81          (cmd-sym (unless (eq frontend 'unknown)
82                         (intern (format (cond ((eq frontend 'gud) "gud-%s-%s")
83                                              ((eq frontend 'realgud) "%s-%s")
84                                              (t "%s-%s"))
85                                          type
86                                          "command-name")))))
87   (message "[launch-json:params]: Found type: %s -> { frontend: %s | backend: %s }" type (symbol-name
88   frontend) (symbol-name backend))

```

```

89 (cond ((memq backend '(gud-gdb gdb))
90       ;; Special case for '(gud . gdb), uses `gdb-mi'
91       (let ((use-gdb-mi (equal front/backend '(gud . gdb))))
92         `(:type ,type
93           :debug-cmd ,(if use-gdb-mi 'gdb (intern type))
94           :args-format " --args %s %s"
95           :cmd ,cmd-sym
96           :require ,(if use-gdb-mi 'gdb-mi frontend))))
97       ((eq backend 'lldb)
98         `(:type ,type
99           :debug-cmd ,(intern type)
100          :args-format " -- %s %s"
101          :cmd ,cmd-sym
102          :require ,(intern (if (eq frontend 'realgud)
103                                (+str-replace-all '("--" . "-") (":" . "-")) type)
104                                type))))
105       (t ;; TODO: to be expanded for each debugger
106         `(:type ,type
107           :debug-cmd ,(intern type)
108           :args-format " %s %s"
109           :cmd ,(if (equal front/backend '(realgud . ipdb)) 'realgud--ipdb-command-name cmd-sym)
110           :require ,(cond ((equal front/backend '(realgud . trepan-ni)) 'realgud-trepan-ni)
111                           (t frontend))))))
112
113 (defun launch-json--debug-command (params debuggee-args)
114   "Return the debug command for PARAMS with DEBUGGEE-ARGS."
115   (when-let* ((prog (car debuggee-args))
116              (cmd (plist-get params :cmd))
117              (pkg (plist-get params :require)))
118     (if (or (not pkg) (eq pkg 'unknown))
119         (progn (message "[launch-json:command]: Unknown debugger"
120                        nil)
121               (if (not (require (plist-get params :require) nil t))
122                   (progn (message "[launch-json:command]: Cannot add package %s" (symbol-name pkg))
123                         nil)
124                   (let ((args (+str-join " " (cdr debuggee-args))))
125                     (when args (setq args (format (plist-get params :args-format) prog args)))
126                     (if (bound-and-true-p cmd)
127                         (concat (eval cmd) (if args args ""))
128                         (message "[launch-json:command]: Invalid command for type %s" (plist-get params :type)
129                               nil))))))
130     (launch-json--debug-command (launch-json--debugger-params "realgud:gdb") '("prog" "arg1" "arg2"))
131
132
133 (defun launch-json-read (&optional file)
134   "Return the configurations section from a launch.json FILE.
135   If FILE is nil, launch.json will be searched in the current project,
136   if it is set to a launch.json file, it will be used instead."
137   (let ((launch-json (expand-file-name (or file "launch.json") (or (projectile-project-root) "."))))
138     (when (file-exists-p launch-json)
139       (message "[launch-json]: Found \"launch.json\" at %s" launch-json)
140       (let* ((launch (with-temp-buffer
141                      (insert-file-contents launch-json)
142                      (json-parse-buffer :object-type 'plist :array-type 'list :null-object nil :false-object
143    ↪ nil))))
144         (configs (plist-get launch :configurations)))
145         (+filter (lambda (conf)
146                   (or (string-match-p launch-json--gud-debugger-regex (plist-get conf :type))
147                     (string-match-p launch-json--realgud-debugger-regex (plist-get conf :type))))
148                 configs))))
149
150 (defun launch-json--config-choice (&optional file)
151   (let* ((confs (or (launch-json-read file)
152                    +launch-json-debug-config))
153          (candidates (mapcar (lambda (conf)
154                                (cons (format "%s [%s]" (plist-get conf :name) (plist-get conf :type))
155                                      conf))
156                            confs)))
157     (cond ((eq (length confs) 1)
158           (car confs))
159           (t
160            (error "Multiple configurations found: %s" confs))))

```

```

158      (> (length confs) 1)
159      (cdr (assoc (completing-read "Configuration: " candidates) candidates))))))
160
161 (defun launch-json-debug (&optional file)
162   "Launch RealGUD or GDB with parameters from `+launch-json-debug-config' or launch.json file."
163   (interactive)
164   (let* ((conf (or launch-json--last-config
165                   (launch-json--config-choice file)))
166          (args (launch-json--substitute-special-vars (plist-get conf :program) (plist-get conf :args)))
167          (type (plist-get conf :type))
168          (params (launch-json--debugger-params type)))
169     (when params
170      (let ((debug-cmd (plist-get params :debug-cmd)))
171        (when (fboundp debug-cmd)
172          (setq-local launch-json--last-config conf)
173          (funcall debug-cmd
174                   (launch-json--debug-command params args)))))))
175
176 (map! :leader :prefix ("l" . "custom")
177      (:when (modulep! :tools debugger)
178       :prefix ("d" . "debugger")
179       :desc "GUD/RealGUD launch.json" "d" #'launch-json-debug))

```

8.10.5 Valgrind

```

1 (package! valgrind
2   :recipe (:local-repo "lisp/valgrind"))

```

```

1 (use-package! valgrind
2   :commands valgrind)

```

8.11 Git & VC

8.11.1 Magit

```

1 (after! code-review
2   (setq code-review-auth-login-marker 'forge))

```

```

1 (after! magit
2   ;; Disable if it causes performance issues
3   (setq magit-diff-refine-hunk 'all))

```

Granular diff-highlights for *all* hunks

```

1 (after! magit
2   ;; Show gravatars
3   (setq magit-revision-show-gravatars '("^Author:      " . "^Commit:      ")))

```

Gravatars


```

1 (package! company-gitcommit
2   :disable t
3   :recipe (:local-repo "lisp/company-gitcommit"))

```

WIP Company for commit messages

```

1 (use-package! company-gitcommit
2   :init
3   (add-hook
4     'git-commit-setup-hook
5     (lambda ()
6       (let ((backends (car company-backends)))
7         (setq company-backend
8               (if (listp backends)
9                   (cons (append backends 'company-gitcommit) (car company-backends))
10                  (append company-backends (list 'company-gitcommit)))))))

```

```

1 (package! magit-pretty-graph
2   :recipe (:host github
3           :repo "georgek/magit-pretty-graph"))

```

Pretty graph

```

1 (use-package! magit-pretty-graph
2   :after magit)

```

8.11.2 Repo

This adds Emacs integration of **repo**, The Multiple Git Repository Tool. Make sure the repo tool is installed, if not, `pacman -S repo` on Arch-based distributions, or directly with:

```

REPO_PATH="$HOME/.local/bin/repo"
curl "https://storage.googleapis.com/git-repo-downloads/repo" > "${REPO_PATH}"
chmod a+x "${REPO_PATH}"

```

```

1 (package! repo)

```

```

1 (use-package! repo
2   :when REPO-P
3   :commands repo-status)

```

8.11.3 Blamer

Display Git information (author, date, message...) for current line

```

1 (package! blamer
2   :recipe (:host github
3           :repo "artawower/blamer.el"))

```

```

1 (use-package! blamer
2   :commands (blamer-mode)
3   ;; :hook ((prog-mode . blamer-mode))
4   :custom
5   (blamer-idle-time 0.3)
6   (blamer-min-offset 60)
7   (blamer-pretty-time-p t)
8   (blamer-entire-formatter " %s")
9   (blamer-author-formatter " %s ")
10  (blamer-datetime-formatter "[%s], ")
11  (blamer-commit-formatter "%s")
12  :custom-face
13  (blamer-face ((t :foreground "#7a88cf"
14                  :background nil
15                  :height 125
16                  :italic t)))
17  :config
18  (when (modulep! :ui zen) ;; Disable in zen (writeroom) mode
19    (add-hook 'writeroom-mode-enable-hook
20      (when (bound-and-true-p blamer-mode)
21        (setq +blamer-mode--was-active-p t)
22        (blamer-mode -1)))
23    (add-hook 'writeroom-mode-disable-hook
24      (when (bound-and-true-p +blamer-mode--was-active-p)
25        (blamer-mode 1))))))

```

8.12 Assembly

Add some packages for better assembly coding.

```

1 (package! nasm-mode)
2 (package! haxor-mode)
3 (package! mips-mode)
4 (package! riscv-mode)
5 (package! x86-lookup)

```

```

1 (use-package! nasm-mode
2   :mode "\\.[n]*\\(asm\\|s\\|\\)"
3
4   ;; Get Haxor VM from https://github.com/krzysztof-magosa/haxor
5   (use-package! haxor-mode
6     :mode "\\.[hax]\\")
7
8   (use-package! mips-mode
9     :mode "\\.[mips]\\")
10
11  (use-package! riscv-mode
12    :mode "\\.[riscv]\\")
13
14  (use-package! x86-lookup
15    :commands (x86-lookup)
16    :config
17    (when (modulep! :tools pdf)
18      (setq x86-lookup-browse-pdf-function 'x86-lookup-browse-pdf-pdf-tools))
19    ;; Get manual from https://www.intel.com/content/www/us/en/developer/articles/technical/intel-sdm.html
20    (setq x86-lookup-pdf (expand-file-name "x86-lookup/325383-sdm-vol-2abcd.pdf" doom-data-dir)))

```

8.13 Disaster

```

1 (package! disaster)

```

```

1 (use-package! disaster
2   :commands (disaster)
3   :init
4   (setq disaster-assembly-mode 'nasm-mode)
5
6   (map! :localleader
7     :map (c++-mode-map c-mode-map fortran-mode)
8     :desc "Disaster" "d" #'disaster))

```

8.14 Devdocs

```

1 (package! devdocs
2   :recipe (:host github
3           :repo "astoff/devdocs.el"
4           :files ("*.el")))

```

```

1 (use-package! devdocs
2   :commands (devdocs-lookup devdocs-install)
3   :config
4   (setq devdocs-data-dir (expand-file-name "devdocs" doom-data-dir)))

```

8.15 Systemd

For editing systemd unit files.

```

1 (package! systemd)
2
3 (package! journalctl-mode)

```

```

1 (use-package! journalctl-mode
2   :commands (journalctl
3             journalctl-boot
4             journalctl-unit
5             journalctl-user-unit)
6   :init
7   (map! :map journalctl-mode-map
8         :nv "J" #'journalctl-next-chunk
9         :nv "K" #'journalctl-previous-chunk))

```

8.16 PKGBUILD

```

1 (package! pkgbuild-mode)

```

```

1 (use-package! pkgbuild-mode
2   :commands (pkgbuild-mode)
3   :mode ("/PKGBUILD$"))

```

8.17 Franca IDL

Add support for *Franca Interface Definition Language*.

```

1 (package! franca-idl
2   :recipe (:host github
3           :repo "zephle/franca-idl.el"))

```

```

1 (use-package! franca-idl
2   :commands franca-idl-mode)

```

8.18 *L^AT_EX*

```

1 (package! aas
2   :recipe (:host github
3           :repo "ymarco/auto-activating-snippets"))

```

```

1 (use-package! aas
2   :commands aas-mode)

```

8.19 Flycheck + Projectile

WIP: Not working atm!

```

1 (package! flycheck-projectile
2   :recipe (:host github
3           :repo "nbfalcon/flycheck-projectile"))

```

```

1 (use-package! flycheck-projectile
2   :commands flycheck-projectile-list-errors)

```

8.20 Graphviz

Graphviz is a nice method of visualizing simple graphs, based on the DOT graph description language (*.dot / *.gv files).

```

1 (package! graphviz-dot-mode)

```

```

1 (use-package! graphviz-dot-mode
2   :commands graphviz-dot-mode
3   :mode ("\\.dot\\'" "\\.gv\\'")
4   :init
5   (after! org
6     (setcdr (assoc "dot" org-src-lang-modes) 'graphviz-dot)))
7
8 (use-package! company-graphviz-dot
9   :after graphviz-dot-mode)

```

8.21 Modula-II

Gaius Mulley is doing a great job, bringing Modula-II support to GCC, he also created a new mode for Modula-II with extended features. The mode is included with the GNU Modula 2 source code, and can be downloaded separately from the Git repository, from here [gm2-mode.el](#). I added (provide 'gm2-mode) to the `gm2-mode.el`.

```
1 (package! gm2-mode
2   :recipe (:local-repo "lisp/gm2-mode"))
```

8.22 Mermaid

```
1 (package! mermaid-mode)
2
3 (package! ob-mermaid
4   :recipe (:host github
5           :repo "arnm/ob-mermaid"))
```

```
1 (use-package! mermaid-mode
2   :commands mermaid-mode
3   :mode "\\\\.mmd\\.")
4
5 (use-package! ob-mermaid
6   :after org
7   :init
8   (after! org
9     (add-to-list 'org-babel-load-languages '(mermaid . t))))
```

8.23 The V Programming Language

```
1 (package! v-mode)
```

```
1 (use-package! v-mode
2   :mode ("\\(\\.v?v\\|\\.vsh\\)$" . 'v-mode)
3   :config
4   (map! :localleader
5         :map (v-mode-map)
6         :desc "v-format-buffer" "f" #'v-format-buffer
7         :desc "v-menu" "m" #'v-menu))
```

8.24 Inspector

```
1 (package! inspector
2   :recipe (:host github
3           :repo "mmontone/emacs-inspector"))
```

```
1 (use-package! inspector
2   :commands (inspect-expression inspect-last-sexp))
```

9 Office

9.1 Org additional packages

To avoid problems in the `(after! org)` section.

```

1 (unpin! org-roam) ;; To avoid problems with org-roam-ui
2 (package! websocket)
3 (package! org-roam-ui)
4 (package! org-wild-notifier)
5 (package! org-fragtog)
6 (package! org-appear)
7 (package! org-super-agenda)
8 (package! doct)
9
10 (package! citar-org-roam
11   :recipe (:host github
12            :repo "emacs-citar/citar-org-roam"))
13
14 (package! org-menu
15   :recipe (:host github
16            :repo "sheijk/org-menu"))
17
18 (package! caldav
19   :recipe (:host github
20            :repo "dengste/org-caldav"))
21
22 (package! org-ol-tree
23   :recipe (:host github
24            :repo "Townk/org-ol-tree"))
25
26 (package! org-modern
27   :recipe (:host github
28            :repo "minad/org-modern"))
29
30 (package! org-bib
31   :recipe (:host github
32            :repo "rougier/org-bib-mode"))
33
34 (package! academic-phrases
35   :recipe (:host github
36            :repo "nashamri/academic-phrases"))
37
38 (package! phscroll
39   :recipe (:host github
40            :repo "misohena/phscroll"))

```

9.2 Org mode

9.2.1 Intro

Because this section is fairly expensive to initialize, we'll wrap it in a `(after! ...)` block.

```

1 (after! org
2   <<org-conf>>
3 )

```

9.2.2 Behavior

Tweaking defaults

```

1 (setq org-directory "~/Dropbox/Org/" ; let's put files here
2   org-use-property-inheritance t ; it's convenient to have properties inherited
3   org-log-done 'time ; having the time an item is done sounds convenient
4   org-list-allow-alphabetical t ; have a. A. a) A) list bullets
5   org-export-in-background nil ; run export processes in external emacs process
6   org-export-async-debug t
7   org-tags-column 0
8   org-catch-invisible-edits 'smart ; try not to accidentally do weird stuff in invisible regions
9   org-export-with-sub-superscripts '{ } ; don't treat lone _ / ^ as sub/superscripts, require _{ } / ^{ }
10  org-pretty-entities-include-sub-superscripts nil
11  org-auto-align-tags nil
12  org-special-ctrl-a/e t
13  org-startup-indented t ; Enable 'org-indent-mode' by default, override with '+#startup: noindent' for big
↪ files
14  org-insert-heading-respect-content t)

```

Org basics

Babel I also like the `:comments` header-argument, so let's make that a default.

```

1 (setq org-babel-default-header-args
2   '(:session . "none")
3     (:results . "replace")
4     (:exports . "code")
5     (:cache . "no")
6     (:noweb . "no")
7     (:hlines . "no")
8     (:tangle . "no")
9     (:comments . "link")))

```

Babel is really annoying when it comes to working with Scheme (via Geiser), it keeps asking about which Scheme implementation to use, I tried to set this as a local variable (using `)` and `.dir-locals.el`, but it didn't work. This hack should solve the problem now!

```

1 ;; stolen from https://github.com/yohan-pereira/.emacs#babel-config
2 (defun +org-confirm-babel-evaluate (lang body)
3   (not (string= lang "scheme"))) ; Don't ask for scheme
4
5 (setq org-confirm-babel-evaluate #' +org-confirm-babel-evaluate)

```

EVIL There also seem to be a few keybindings which use `hjkl`, but miss arrow key equivalents.

```

1 (map! :map evil-org-mode-map
2   :after evil-org
3   :n "g <up>" #'org-backward-heading-same-level
4   :n "g <down>" #'org-forward-heading-same-level
5   :n "g <left>" #'org-up-element
6   :n "g <right>" #'org-down-element)

```

```

1 (setq org-todo-keywords
2   '((sequence "IDEA(i)" "TODO(t)" "NEXT(n)" "PROJ(p)" "STRT(s)" "WAIT(w)" "HOLD(h)" "|" "DONE(d)" "KILL(k)")
3     (sequence "[ ](T)" "[ ](S)" "|" "[X](D)")
4     (sequence "|" "OKAY(o)" "YES(y)" "NO(n)")))
5
6 (setq org-todo-keyword-faces
7   '(("IDEA" . (:foreground "goldenrod" :weight bold))

```

```

8      ("NEXT" . (:foreground "IndianRed1" :weight bold))
9      ("STRT" . (:foreground "OrangeRed" :weight bold))
10     ("WAIT" . (:foreground "coral" :weight bold))
11     ("KILL" . (:foreground "DarkGreen" :weight bold))
12     ("PROJ" . (:foreground "LimeGreen" :weight bold))
13     ("HOLD" . (:foreground "orange" :weight bold)))
14
15 (defun +log-todo-next-creation-date (&rest ignore)
16   "Log NEXT creation time in the property drawer under the key 'ACTIVATED'"
17   (when (and (string= (org-get-todo-state) "NEXT")
18             (not (org-entry-get nil "ACTIVATED"))))
19     (org-entry-put nil "ACTIVATED" (format-time-string "[%Y-%m-%d] "))))
20
21 (add-hook 'org-after-todo-state-change-hook #' +log-todo-next-creation-date)

```

TODOs

```

1 (setq org-tag-persistent-alist
2   '((:startgroup . nil)
3     ("home" . ?h)
4     ("research" . ?r)
5     ("work" . ?w)
6     (:endgroup . nil)
7     (:startgroup . nil)
8     ("tool" . ?o)
9     ("dev" . ?d)
10    ("report" . ?p)
11    (:endgroup . nil)
12    (:startgroup . nil)
13    ("easy" . ?e)
14    ("medium" . ?m)
15    ("hard" . ?a)
16    (:endgroup . nil)
17    ("urgent" . ?u)
18    ("key" . ?k)
19    ("bonus" . ?b)
20    ("ignore" . ?i)
21    ("noexport" . ?x)))
22
23 (setq org-tag-faces
24   '(("home" . (:foreground "goldenrod" :weight bold))
25     ("research" . (:foreground "goldenrod" :weight bold))
26     ("work" . (:foreground "goldenrod" :weight bold))
27     ("tool" . (:foreground "IndianRed1" :weight bold))
28     ("dev" . (:foreground "IndianRed1" :weight bold))
29     ("report" . (:foreground "IndianRed1" :weight bold))
30     ("urgent" . (:foreground "red" :weight bold))
31     ("key" . (:foreground "red" :weight bold))
32     ("easy" . (:foreground "green4" :weight bold))
33     ("medium" . (:foreground "orange" :weight bold))
34     ("hard" . (:foreground "red" :weight bold))
35     ("bonus" . (:foreground "goldenrod" :weight bold))
36     ("ignore" . (:foreground "Gray" :weight bold))
37     ("noexport" . (:foreground "LimeGreen" :weight bold))))
38

```

Tags

Agenda Set files for org-agenda

```

1 (setq org-agenda-files
2   (list (expand-file-name "inbox.org" org-directory)
3         (expand-file-name "agenda.org" org-directory)

```



```

4      (expand-file-name "gcal-agenda.org" org-directory)
5      (expand-file-name "notes.org" org-directory)
6      (expand-file-name "projects.org" org-directory)
7      (expand-file-name "archive.org" org-directory)))

```

Apply some styling on the standard agenda:

```

1  ;; Agenda styling
2  (setq org-agenda-block-separator ?[]
3        org-agenda-time-grid
4        '((daily today require-timed)
5          (800 1000 1200 1400 1600 1800 2000)
6          " " " " " ")
7        org-agenda-current-time-string
8        " now ")

```

Super agenda Configure org-super-agenda

```

1  (use-package! org-super-agenda
2    :defer t
3    :config
4    (org-super-agenda-mode)
5    :init
6    (setq org-agenda-skip-scheduled-if-done t
7          org-agenda-skip-deadline-if-done t
8          org-agenda-include-deadlines t
9          org-agenda-block-separator nil
10         org-agenda-tags-column 100 ;; from testing this seems to be a good value
11         org-agenda-compact-blocks t)
12
13  (setq org-agenda-custom-commands
14        '(("o" "Overview"
15          ((agenda "" ((org-agenda-span 'day)
16                     (org-super-agenda-groups
17                      '(:name "Today"
18                        :time-grid t
19                        :date today
20                        :todo "TODAY"
21                        :scheduled today
22                        :order 1))))))
23          (alltodo "" ((org-agenda-overriding-header "")
24                      (org-super-agenda-groups
25                       '(:name "Next to do" :todo "NEXT" :order 1)
26                         (:name "Important" :tag "Important" :priority "A" :order 6)
27                         (:name "Due Today" :deadline today :order 2)
28                         (:name "Due Soon" :deadline future :order 8)
29                         (:name "Overdue" :deadline past :face error :order 7)
30                         (:name "Assignments" :tag "Assignment" :order 10)
31                         (:name "Issues" :tag "Issue" :order 12)
32                         (:name "Emacs" :tag "Emacs" :order 13)
33                         (:name "Projects" :tag "Project" :order 14)
34                         (:name "Research" :tag "Research" :order 15)
35                         (:name "To read" :tag "Read" :order 30)
36                         (:name "Waiting" :todo "WAIT" :order 20)
37                         (:name "University" :tag "Univ" :order 32)
38                         (:name "Trivial" :priority<= "E" :tag ("Trivial" "Unimportant") :todo ("SOMEDAY"))
39
40                         (:discard (:tag ("Chore" "Routine" "Daily"))))))))))))

```

Calendar

Google calendar (org-gcal) I store my org-gcal configuration privately, it contains something like this:

```
(setq org-gcal-client-id "<SOME_ID>.apps.googleusercontent.com"
      org-gcal-client-secret "<SOME_SECRET>"
      org-gcal-fetch-file-alist '(((<USERNAME>@gmail.com" . "~/Dropbox/Org/gcal-agenda.org"))))
```

```
1 (after! org-gcal
2   (load! "lisp/private/org-gcal.el"))
```

TODO CalDAV Need to be configured, see the GitHub repo.

```
1 (use-package! caldav
2   :commands (org-caldav-sync))
```

Capture Set capture files

```
1 (setq +org-capture-emails-file (expand-file-name "inbox.org" org-directory)
2   +org-capture-todo-file (expand-file-name "inbox.org" org-directory)
3   +org-capture-projects-file (expand-file-name "projects.org" org-directory))
```

Let's set up some `org-capture` templates, and make them visually nice to access.

```
1 (use-package! doct
2   :commands (doct))
```

```
1 (after! org-capture
2   <prettify-capture>)
3
4 (defun +doct-icon-declaration-to-icon (declaration)
5   "Convert :icon declaration to icon"
6   (let ((name (pop declaration))
7         (set (intern (concat "all-the-icons-" (plist-get declaration :set))))
8         (face (intern (concat "all-the-icons-" (plist-get declaration :color))))
9         (v-adjust (or (plist-get declaration :v-adjust) 0.01)))
10    (apply set `(,name :face ,face :v-adjust ,v-adjust))))
11
12 (defun +doct-iconify-capture-templates (groups)
13   "Add declaration's :icon to each template group in GROUPS."
14   (let ((templates (doct-flatten-lists-in groups)))
15     (setq doct-templates
16           (mapcar (lambda (template)
17                     (when-let* ((props (nthcdr (if (= (length template) 4) 2 5) template))
18                               (spec (plist-get (plist-get props :doct) :icon)))
19                       (setf (nth 1 template) (concat (+doct-icon-declaration-to-icon spec)
20                                                         "\t"
21                                                         (nth 1 template))))
22                     template)
23           templates))))
24
25 (setq doct-after-conversion-functions '(+doct-iconify-capture-templates))
26
27 (defun set-org-capture-templates ()
28   (setq org-capture-templates
29         (doct `(("Personal todo" :keys "t"
30                  :icon ("checklist" :set "octicon" :color "green")
31                  :file +org-capture-todo-file
32                  :prepend t
33                  :headline "Inbox"
34                  :type entry
35                  :template ("* TODO %?"
36                             "%i %a")
37                  ("Personal note" :keys "n"))
```

```

38      :icon ("sticky-note-o" :set "faicon" :color "green")
39      :file +org-capture-todo-file
40      :prepend t
41      :headline "Inbox"
42      :type entry
43      :template ("* %?"
44                 "%i %a"))
45      ("Email" :keys "e"
46       :icon ("envelope" :set "faicon" :color "blue")
47       :file +org-capture-todo-file
48       :prepend t
49       :headline "Inbox"
50       :type entry
51       :template ("* TODO %^{type|reply to|contact} %\\3 %? :email:"
52                  "Send an email %^{urgancy|soon|ASAP|anon|at some point|eventually} to
↪ %^{recipiant}"
53                  "about %^{topic}"
54                  "%U %i %a"))
55      ("Interesting" :keys "i"
56       :icon ("eye" :set "faicon" :color "lcyan")
57       :file +org-capture-todo-file
58       :prepend t
59       :headline "Interesting"
60       :type entry
61       :template ("* [ ] %^{desc}%? :%{i-type}:"
62                  "%i %a")
63       :children ((("Webpage" :keys "w"
64                     :icon ("globe" :set "faicon" :color "green")
65                     :desc "%(org-cliplink-capture) "
66                     :i-type "read:web")
67                   ("Article" :keys "a"
68                     :icon ("file-text" :set "octicon" :color "yellow")
69                     :desc ""
70                     :i-type "read:reaserch")
71                   ("Information" :keys "i"
72                     :icon ("info-circle" :set "faicon" :color "blue")
73                     :desc ""
74                     :i-type "read:info")
75                   ("Idea" :keys "I"
76                     :icon ("bubble_chart" :set "material" :color "silver")
77                     :desc ""
78                     :i-type "idea"))))
79      ("Tasks" :keys "k"
80       :icon ("inbox" :set "octicon" :color "yellow")
81       :file +org-capture-todo-file
82       :prepend t
83       :headline "Tasks"
84       :type entry
85       :template ("* TODO %? %G^{extra}"
86                  "%i %a")
87       :children ((("General Task" :keys "k"
88                     :icon ("inbox" :set "octicon" :color "yellow")
89                     :extra "")
90                   ("Task with deadline" :keys "d"
91                     :icon ("timer" :set "material" :color "orange" :v-adjust -0.1)
92                     :extra "\nDEADLINE: %^{Deadline:}t")
93                   ("Scheduled Task" :keys "s"
94                     :icon ("calendar" :set "octicon" :color "orange")
95                     :extra "\nSCHEDULED: %^{Start time:}t"))))
96      ("Project" :keys "p"
97       :icon ("repo" :set "octicon" :color "silver")
98       :prepend t
99       :type entry
100      :headline "Inbox"
101      :template ("* %^{time-or-todo} %?"
102                 "%i"
103                 "%a")
104      :file ""

```

```

107      :custom (:time-or-todo "")
108      :children ((("Project-local todo" :keys "t"
109                  :icon ("checklist" :set "octicon" :color "green")
110                  :time-or-todo "TODO"
111                  :file +org-capture-project-todo-file)
112                ("Project-local note" :keys "n"
113                  :icon ("sticky-note" :set "faicon" :color "yellow")
114                  :time-or-todo "%U"
115                  :file +org-capture-project-notes-file)
116                ("Project-local changelog" :keys "c"
117                  :icon ("list" :set "faicon" :color "blue")
118                  :time-or-todo "%U"
119                  :heading "Unreleased"
120                  :file +org-capture-project-changelog-file)))
121      ("Centralised project templates"
122       :keys "o"
123       :type entry
124       :prepend t
125       :template ("* %{{time-or-todo}} %?"
126                 "%i"
127                 "%a")
128       :children ((("Project todo"
129                   :keys "t"
130                   :prepend nil
131                   :time-or-todo "TODO"
132                   :heading "Tasks"
133                   :file +org-capture-central-project-todo-file)
134                 ("Project note"
135                  :keys "n"
136                  :time-or-todo "%U"
137                  :heading "Notes"
138                  :file +org-capture-central-project-notes-file)
139                 ("Project changelog"
140                  :keys "c"
141                  :time-or-todo "%U"
142                  :heading "Unreleased"
143                  :file +org-capture-central-project-changelog-file))))))
144
145 (set-org-capture-templates)
146 (unless (display-graphic-p)
147   (add-hook 'server-after-make-frame-hook
148     (defun org-capture-reinitialise-hook ()
149       (when (display-graphic-p)
150         (set-org-capture-templates)
151         (remove-hook 'server-after-make-frame-hook
152           #'org-capture-reinitialise-hook))))))

```

It would also be nice to improve how the capture dialogue looks

```

1 (defun org-capture-select-template-prettier (&optional keys)
2   "Select a capture template, in a prettier way than default
3   Lisp programs can force the template by setting KEYS to a string."
4   (let ((org-capture-templates
5         (or (org-contextualize-keys
6              (org-capture-upgrade-templates org-capture-templates)
7              org-capture-templates-contexts)
8             '(("t" "Task" entry (file+headline "" "Tasks")
9               "* TODO %?\n %u\n %a")))))
10     (if keys
11         (or (assoc keys org-capture-templates)
12             (error "No capture template referred to by \"%s\" keys" keys))
13         (org-mks org-capture-templates
14                  "Select a capture template\n"
15                  "Template key: "
16                  `(("q" , (concat (all-the-icons-octicon "stop" :face 'all-the-icons-red :v-adjust 0.01)
17                                "\tAbort")))))
17   (advice-add 'org-capture-select-template :override #'org-capture-select-template-prettier)
18
19 (defun org-mks-prettier (table title &optional prompt specials)

```

```

20 "Select a member of an alist with multiple keys. Prettified.
21
22 TABLE is the alist which should contain entries where the car is a string.
23 There should be two types of entries.
24
25 1. prefix descriptions like (\a\ "Description\")
26 This indicates that `a' is a prefix key for multi-letter selection, and
27 that there are entries following with keys like \ab\, \ax\...
28
29 2. Select-able members must have more than two elements, with the first
30 being the string of keys that lead to selecting it, and the second a
31 short description string of the item.
32
33 The command will then make a temporary buffer listing all entries
34 that can be selected with a single key, and all the single key
35 prefixes. When you press the key for a single-letter entry, it is selected.
36 When you press a prefix key, the commands (and maybe further prefixes)
37 under this key will be shown and offered for selection.
38
39 TITLE will be placed over the selection in the temporary buffer,
40 PROMPT will be used when prompting for a key. SPECIALS is an
41 alist with (\key\ "description\") entries. When one of these
42 is selected, only the bare key is returned."
43 (save-window-excursion
44   (let ((inhibit-quit t)
45         (buffer (org-switch-to-buffer-other-window "*Org Select*"))
46         (prompt (or prompt "Select: "))
47         case-fold-search
48         current)
49     (unwind-protect
50       (catch 'exit
51         (while t
52           (setq-local evil-normal-state-cursor (list nil))
53           (erase-buffer)
54           (insert title "\n\n")
55           (let ((des-keys nil)
56                 (allowed-keys '("\C-g"))
57                 (tab-alternatives '("\s" "\t" "\r"))
58                 (cursor-type nil))
59             ;; Populate allowed keys and descriptions keys
60             ;; available with CURRENT selector.
61             (let ((re (format "\\%s\\(\\.\\)\\|'"
62                               (if current (regexp-quote current) "")))
63               (prefix (if current (concat current " ") "")))
64               (dolist (entry table)
65                 (pcase entry
66                   ;; Description.
67                   `((, (and key (pred (string-match re))) ,desc)
68                     (let ((k (match-string 1 key)))
69                       (push k des-keys)
70                       ;; Keys ending in tab, space or RET are equivalent.
71                       (if (member k tab-alternatives)
72                           (push "\t" allowed-keys)
73                           (push k allowed-keys))
74                       (insert (propertize prefix 'face 'font-lock-comment-face) (propertize k 'face 'bold) "
75                               ↪ (propertize ">" 'face 'font-lock-comment-face) " " desc "..." "\n"))
76                       ;; Usable entry.
77                       `((, (and key (pred (string-match re))) ,desc . ,_)
78                         (let ((k (match-string 1 key)))
79                           (insert (propertize prefix 'face 'font-lock-comment-face) (propertize k 'face 'bold) "
80                               ↪ " desc "\n")
81                           (push k allowed-keys)))
82                         (_ nil))))
83                   ;; Insert special entries, if any.
84                   (when specials
85                     (insert "          \n")
86                     (pcase-dolist `((,key ,description) specials)
87                       (insert (format "%s %s\n" (propertize key 'face '(bold all-the-icons-red)) description))
88                       (push key allowed-keys)))
89                   ;; Display UI and let user select an entry or

```

```

88      ;; a sublevel prefix.
89      (goto-char (point-min))
90      (unless (pos-visible-in-window-p (point-max))
91        (org-fit-window-to-buffer))
92      (let ((pressed (org--mks-read-key allowed-keys
93                                     prompt
94                                     (not (pos-visible-in-window-p (1- (point-max)))))))
95        (setq current (concat current pressed))
96        (cond
97          ((equal pressed "\C-g") (user-error "Abort"))
98          ;; Selection is a prefix: open a new menu.
99          ((member pressed des-keys))
100         ;; Selection matches an association: return it.
101         ((let ((entry (assoc current table)))
102            (and entry (throw 'exit entry))))
103         ;; Selection matches a special entry: return the
104         ;; selection prefix.
105         ((assoc current specials) (throw 'exit current))
106         (t (error "No entry available"))))))
107      (when buffer (kill-buffer buffer))))
108      (advice-add 'org-mks :override #'org-mks-pretty)

```

The org-capture bin is rather nice, but I'd be nicer with a smaller frame, and no modeline.

```

1  (setf (alist-get 'height +org-capture-frame-parameters) 15)
2  ;; (alist-get 'name +org-capture-frame-parameters) " Capture" ;; ATM hardcoded in other places, so changing
   ↪ breaks stuff
3  (setq +org-capture-fn
4        (lambda ()
5          (interactive)
6          (set-window-parameter nil 'mode-line-format 'none)
7          (org-capture)))

```

Roam Org-roam is nice by itself, but there are so *extra* nice packages which integrate with it.

```

1  (use-package! websocket
2    :after org-roam-ui)
3
4  (use-package! org-roam-ui
5    :commands org-roam-ui-open
6    :config (setq org-roam-ui-sync-theme t
7                  org-roam-ui-follow t
8                  org-roam-ui-update-on-save t
9                  org-roam-ui-open-on-start t))

```

```

1  (setq org-roam-directory "~/Dropbox/Org/slip-box")
2  (setq org-roam-db-location (expand-file-name "org-roam.db" org-roam-directory))

```

Basic settings

That said, if the directory doesn't exist we likely don't want to be using roam. Since we don't want to trigger errors (which will happen as soon as roam tries to initialize), let's not load roam.

```

1  (package! org-roam
2    :disable t)

```

Mode line file name All those numbers! It's messy. Let's adjust this similarly that I have in the window title

```

1 (defadvice! doom-modeline--buffer-file-name-roam-aware-a (orig-fun)
2   :around #'doom-modeline-buffer-file-name ; takes no args
3   (if (s-contains-p org-roam-directory (or buffer-file-name ""))
4       (replace-regexp-in-string
5         "\\(?:~|\\.*/\\)\\([0-9]\\{4\\}\\)\\([0-9]\\{2\\}\\)\\([0-9]\\{2\\}\\)\\([0-9]*-?"
6         "(\\1-\\2-\\3) "
7         (subst-char-in-string ?_ ? buffer-file-name))
8       (funcall orig-fun)))

```

```

1 (after! org-roam
2   (setq org-roam-capture-ref-templates
3     '(("r" "ref" plain "%?"
4       :if-new (file+head "web/%<%Y%m%d%H%M%S>-${slug}.org" "#+title: ${title}\n#+created: %U\n\n${body}\n")
5       :unnarrowed t))))

```

Org Roam Capture template

Snippet Helpers

I often want to set `src-block` headers, and it's a pain to:

- type them out
- remember what the accepted values are
- oh, and specifying the same language again and again

We can solve this in three steps:

- having one-letter snippets, conditioned on `(point)` being within a src header
- creating a nice prompt showing accepted values and the current default
- pre-filling the `src-block` language with the last language used

For header args, the keys I'll use are:

- r for :results
- e for :exports
- v for :eval
- s for :session
- d for :dir

```

1 (defun +yas/org-src-header-p ()
2   "Determine whether `point' is within a src-block header or header-args."
3   (pcase (org-element-type (org-element-context))
4     ('src-block (< (point) ; before code part of the src-block
5                   (save-excursion (goto-char (org-element-property :begin (org-element-context)))
6                                   (forward-line 1)
7                                   (point)))))
8     ('inline-src-block (< (point) ; before code part of the inline-src-block
9                          (save-excursion (goto-char (org-element-property :begin (org-element-context)))
10                                           (search-forward "]"{" )
11                                           (point)))))
12     ('keyword (string-match-p "^header-args" (org-element-property :value (org-element-context))))))

```

Now let's write a function we can reference in YASnippets to produce a nice interactive way to specify header arguments.

```

1 (defun +yas/org-prompt-header-arg (arg question values)
2   "Prompt the user to set ARG header property to one of VALUES with QUESTION.
3   The default value is identified and indicated. If either default is selected,
4   or no selection is made: nil is returned."
5   (let* ((src-block-p (not (looking-back "^#\\+property: [ \\t]+header-args:.*" (line-beginning-position))))
6         (default
7          (or
8           (cdr (assoc arg
9                     (if src-block-p
10                        (nth 2 (org-babel-get-src-block-info t))
11                        (org-babel-merge-params
12                          org-babel-default-header-args
13                          (let ((lang-headers
14                              (intern (concat "org-babel-default-header-args:"
15                                              (+yas/org-src-lang))))
16                                (when (boundp lang-headers) (eval lang-headers t))))))
17          ""))
18         (default-value)
19         (setq values (mapcar
20                      (lambda (value)
21                        (if (string-match-p (regexp-quote value) default)
22                          (setq default-value
23                                (concat value " "
24                                          (propertyize "(default)" 'face 'font-lock-doc-face)))
25                          value))
26                      values))
27         (let ((selection (consult--read question values :default default-value)))
28           (unless (or (string-match-p "(default)$" selection)
29                       (string= "" selection))
30             selection))))

```

Finally, we fetch the language information for new source blocks.

Since we're getting this info, we might as well go a step further and also provide the ability to determine the most popular language in the buffer that doesn't have any `header-args` set for it (with `#+properties`).

```

1 (defun +yas/org-src-lang ()
2   "Try to find the current language of the src/header at `point'.
3   Return nil otherwise."
4   (let ((context (org-element-context)))
5     (pcase (org-element-type context)
6       ('src-block (org-element-property :language context))
7       ('inline-src-block (org-element-property :language context))
8       ('keyword (when (string-match "^header-args:\\{([ \\t]+)\\}" (org-element-property :value context))
9                    (match-string 1 (org-element-property :value context)))))
10
11 (defun +yas/org-last-src-lang ()
12   "Return the language of the last src-block, if it exists."
13   (save-excursion
14     (beginning-of-line)
15     (when (re-search-backward "[ \\t]*#\\+begin_src" nil t)
16       (org-element-property :language (org-element-context))))
17
18 (defun +yas/org-most-common-no-property-lang ()
19   "Find the lang with the most source blocks that has no global header-args, else nil."
20   (let (src-langs header-langs)
21     (save-excursion
22       (goto-char (point-min))
23       (while (re-search-forward "[ \\t]*#\\+begin_src" nil t)
24         (push (+yas/org-src-lang) src-langs))
25       (goto-char (point-min))
26       (while (re-search-forward "[ \\t]*#\\+property: +header-args" nil t)
27         (push (+yas/org-src-lang) header-langs)))
28
29     (setq src-langs
30           (mapcar #'car

```



```

31      ;; sort alist by frequency (desc.)
32      (sort
33      ;; generate alist with form (value . frequency)
34      (cl-loop for (n . m) in (seq-group-by #'identity src-langs)
35        collect (cons n (length m)))
36      (lambda (a b) (> (cdr a) (cdr b))))))
37
38      (car (cl-set-difference src-langs header-langs :test #'string=)))

```

Translate capital keywords to lower case Everyone used to use **#+CAPITAL** keywords. Then people realised that **#+lowercase** is actually both marginally easier and visually nicer, so now the capital version is just used in the manual.

Org is standardized on lower case. Uppercase is used in the manual as a poor man's bold, and supported for historical reasons. — Nicolas Goaziou

```

1  (defun +org-syntax-convert-keyword-case-to-lower ()
2    "Convert all #+KEYWORDS to #+keywords."
3    (interactive)
4    (save-excursion
5      (goto-char (point-min))
6      (let ((count 0)
7            (case-fold-search nil))
8        (while (re-search-forward "[ \t]*#[A-Z_]+" nil t)
9          (unless (s-matches-p "RESULTS" (match-string 0))
10             (replace-match (downcase (match-string 0)) t)
11             (setq count (1+ count))))
12      (message "Replaced %d occurrences" count)))

```

Org notifier Add support for org-wild-notifier.

```

1  (use-package! org-wild-notifier
2    :hook (org-load . org-wild-notifier-mode)
3    :config
4    (setq org-wild-notifier-alert-time '(60 30)))

```

```

1  (use-package! org-menu
2    :commands (org-menu)
3    :init
4    (map! :localleader
5          :map org-mode-map
6          :desc "Org menu" "M" #'org-menu))

```

Org menu

```

1  (cl-defmacro +lsp-org-babel-enable (lang)
2    "Support LANG in org source code block."
3    ;; (setq centaur-lsp 'lsp-mode)
4    (cl-check-type lang stringp)
5    (let* ((edit-pre (intern (format "org-babel-edit-pre:%s" lang)))
6           (intern-pre (intern (format "lsp--%s" (symbol-name edit-pre)))))
7      ~(progn
8        (defun ,intern-pre (info)

```

```

9      (let ((file-name (->> info caddr (alist-get :file))))
10        (unless file-name
11          (setq file-name (make-temp-file "babel-lsp-"))
12          (setq buffer-file-name file-name)
13          (lsp-deferred)))
14      (put ',intern-pre 'function-documentation
15        (format "Enable lsp-mode in the buffer of org source block (%s).\"
16              (upcase ,lang)))
17      (if (fboundp ',edit-pre)
18        (advice-add ',edit-pre :after ',intern-pre)
19        (progn
20          (defun ,edit-pre (info)
21            (,intern-pre info))
22          (put ',edit-pre 'function-documentation
23            (format "Prepare local buffer environment for org source block (%s).\"
24                  (upcase ,lang))))))
25
26      (defvar +org-babel-lang-list
27        '("go" "python" "ipython" "bash" "sh"))
28
29      (dolist (lang +org-babel-lang-list)
30        (eval `(+lsp-org-babel-enable ,lang)))

```

LSP in src blocks

9.2.3 Custom links

Sub-figures This defines a new link type `subfig` to enable exporting sub-figures to L^AT_EX, taken from “Export subfigures to L^AT_EX (and HTML)”.

```

1  (org-link-set-parameters
2    "subfig"
3    :follow (lambda (file) (find-file file))
4    :face '(:foreground "chocolate" :weight bold :underline t)
5    :display 'full
6    :export
7    (lambda (file desc backend)
8      (when (eq backend 'latex)
9        (if (string-match ">\\(\\.+\\)") desc)
10          (concat "\\begin{subfigure}[b]"
11                "\\caption{" (replace-regexp-in-string "\\s+>\\.+" "" desc) "}"
12                "\\includegraphics" "[" (match-string 1 desc) "]" "{" file "}" "\\end{subfigure}")
13          (format "\\begin{subfigure}\\includegraphics{%s}\\end{subfigure}" desc file))))

```

Example of usage:

```

#+caption: Lorem ipsum dolor
#+attr_latex: :options \centering
#+begin_figure
[[subfig:img1.jpg][Caption of img1 >(width=.3\textwidth)]]

[[subfig:img2.jpg][Caption of img2 >(width=.3\textwidth)]]

[[subfig:img3.jpg][Caption of img3 >(width=.6\textwidth)]]
#+end_figure

```

L^AT_EX inline markup Needs to make a `?`, with this hack you can write `[[latex:textsc][Some text]]`.

```

1  (org-add-link-type
2    "latex" nil
3    (lambda (path desc format)
4      (cond
5        ((eq format 'html)

```

```

6 (format "<span class=\"%s\">%s</span>" path desc))
7 ((eq format 'latex)
8 (format "\\%s{%s}" path desc))))))

```

9.2.4 Visuals

Here I try to do two things: improve the styling of the various documents, via font changes etc., and also propagate colours from the current theme.

Font display

Headings Let's make the title and the headings a bit bigger:

```

1 (custom-set-faces!
2   '(org-document-title :height 1.2))
3
4 (custom-set-faces!
5   '(outline-1 :weight extra-bold :height 1.25)
6   '(outline-2 :weight bold :height 1.15)
7   '(outline-3 :weight bold :height 1.12)
8   '(outline-4 :weight semi-bold :height 1.09)
9   '(outline-5 :weight semi-bold :height 1.06)
10  '(outline-6 :weight semi-bold :height 1.03)
11  '(outline-8 :weight semi-bold)
12  '(outline-9 :weight semi-bold))

```

Deadlines It seems reasonable to have deadlines in the error face when they're passed.

```

1 (setq org-agenda-deadline-faces
2   '((1.001 . error)
3     (1.000 . org-warning)
4     (0.500 . org-upcoming-deadline)
5     (0.000 . org-upcoming-distant-deadline)))

```

Font styling We can then have quote blocks stand out a bit more by making them *italic*.

```

1 (setq org-fontify-quote-and-verse-blocks t)

```

While `org-hide-emphasis-markers` is very nice, it can sometimes make edits which occur at the border a bit more fiddley. We can improve this situation without sacrificing visual amenities with the `org-appear` package.

```

1 (use-package! org-appear
2   :hook (org-mode . org-appear-mode)
3   :config
4   (setq org-appear-autoemphasis t
5         org-appear-autosubmarkers t
6         org-appear-autolinks nil)
7   ;; for proper first-time setup, `org-appear--set-elements'
8   ;; needs to be run after other hooks have acted.
9   (run-at-time nil nil #'org-appear--set-elements))

```

Inline blocks

Abdelhak Bougouffa © 2022

```

60
61 ;; Workaround to disable drawing on fringes
62 (advice-add 'org-modern--block-fringe :override (lambda ()))
63
64 ;; Change faces
65 (custom-set-faces! '(org-modern-tag :inherit (region org-modern-label)))
66 (custom-set-faces! '(org-modern-statistics :inherit org-checkbox-statistics-todo)))

```

Org Modern

Not let's remove the overlap between the substitutions we set here and those that Doom applies via `:ui ligatures` and `:lang org`.

```

1 (when (modulep! :ui ligatures)
2   (defadvice! +org-init-appearance-h--no-ligatures-a ()
3     :after #' +org-init-appearance-h
4     (set-ligatures! 'org-mode
5       :name nil
6       :src_block nil
7       :src_block_end nil
8       :quote nil
9       :quote_end nil)))

```

We'll bind this to 0 on the `org-mode` localleader, and manually apply a PR recognising the pgtk window system.

```

1 (use-package! org-ol-tree
2   :commands org-ol-tree
3   :config
4   (setq org-ol-tree-ui-icon-set
5     (if (and (display-graphic-p)
6              (fboundp 'all-the-icons-material))
7         'all-the-icons
8         'unicode))
9   (org-ol-tree-ui--update-icon-set))
10
11 (map! :localleader
12   :map org-mode-map
13   :desc "Outline" "0" #'org-ol-tree)

```

```

1 (defvar +org-responsive-image-percentage 0.4)
2 (defvar +org-responsive-image-width-limits '(400 . 700)) ;; '(min-width . max-width)
3
4 (defun +org--responsive-image-h ()
5   (when (eq major-mode 'org-mode)
6     (setq org-image-actual-width
7       (max (car +org-responsive-image-width-limits)
8         (min (cdr +org-responsive-image-width-limits)
9           (truncate (* (window-pixel-width) +org-responsive-image-percentage)))))))
10
11 (add-hook 'window-configuration-change-hook #' +org--responsive-image-h)

```

Image previews

List bullet sequence I think it makes sense to have list bullets change with depth

```

1 (setq org-list-demote-modify-bullet
2   '(("+" . "-")
3     ("-" . "+")
4     ("*" . "+")
5     ("1." . "a.")))

```

```

1 ;; Org styling, hide markup etc.
2 (setq org-hide-emphasis-markers t
3       org-pretty-entities t
4       org-ellipsis " "
5       org-hide-leading-stars t)
6 ;; org-priority-highest ?A
7 ;; org-priority-lowest ?E
8 ;; org-priority-faces
9 ;; ' (?A . 'all-the-icons-red)
10 ;;   (?B . 'all-the-icons-orange)
11 ;;   (?C . 'all-the-icons-yellow)
12 ;;   (?D . 'all-the-icons-green)
13 ;;   (?E . 'all-the-icons-blue))

```

Symbols

LaTeX fragments

Prettier highlighting First off, we want those fragments to look good.

```

1 (setq org-highlight-latex-and-related '(native script entities))
2
3 (require 'org-src)
4 (add-to-list 'org-src-block-faces '("latex" (:inherit default :extend t)))

```

Prettier rendering Since we can, instead of making the background color match the default face, let's make it transparent.

```

1 (setq org-format-latex-options
2       (plist-put org-format-latex-options :background "Transparent"))
3
4 ;; Can be dvipng, dvisvgm, imagemagick
5 (setq org-preview-latex-default-process 'dvisvgm)
6
7 ;; Define a function to set the format latex scale (to be reused in hooks)
8 (defun +org-format-latex-set-scale (scale)
9   (setq org-format-latex-options (plist-put org-format-latex-options :scale scale)))
10
11 ;; Set the default scale
12 (+org-format-latex-set-scale 1.4)
13
14 ;; Increase scale in Zen mode
15 (when (modulep! :ui zen)
16   (add-hook! 'writeroom-mode-enable-hook (+org-format-latex-set-scale 2.0))
17   (add-hook! 'writeroom-mode-disable-hook (+org-format-latex-set-scale 1.4)))

```

Better equation numbering Numbered equations all have (1) as the number for fragments with vanilla org-mode. This code (from scimax) injects the correct numbers into the previews, so they look good.

This hack is not properly working right now!, it seems to work only with align blocks. **NEEDS INVESTIGATION.**

```

1 (defun +parse-the-fun (str)
2   "Parse the LaTeX environment STR.
3   Return an AST with newlines counts in each level."
4   (let (ast)
5     (with-temp-buffer
6       (insert str)

```

```

7      (goto-char (point-min))
8      (while (re-search-forward
9        (rx "\\\"
10         (group (or "\\\" \"begin\" \"end\" \"nonumber\"))
11         (zero-or-one \"{ (group (zero-or-more not-newline)) }\"))
12        nil t)
13      (let ((cmd (match-string 1))
14            (env (match-string 2)))
15        (cond ((string= cmd "begin")
16              (push (list :env (intern env)) ast))
17              ((string= cmd "\\")
18              (let ((curr (pop ast)))
19                (push (plist-put curr :newline (1+ (or (plist-get curr :newline) 0))) ast)))
20              ((string= cmd "nonumber")
21              (let ((curr (pop ast)))
22                (push (plist-put curr :nonumber (1+ (or (plist-get curr :nonumber) 0))) ast)))
23              ((string= cmd "end")
24              (let ((child (pop ast))
25                    (parent (pop ast)))
26                (push (plist-put parent :childs (cons child (plist-get parent :childs))) ast))))))
27      (plist-get (car ast) :childs)))
28
29 (defun +scimax-org-renumber-environment (orig-func &rest args)
30   "A function to inject numbers in LaTeX fragment previews."
31   (let ((results '())
32         (counter -1))
33     (setq results
34           (cl-loop for (begin . env) in
35                     (org-element-map (org-element-parse-buffer) 'latex-environment
36                                       (lambda (env)
37                                         (cons
38                                          (org-element-property :begin env)
39                                          (org-element-property :value env))))
36         collect
37         (cond
38          ((and (string-match "\\begin{equation}" env)
39               (not (string-match "\\tag{" env)))
40           (cl-incf counter)
41           (cons begin counter))
42          ((string-match "\\begin{align}" env)
43           (cl-incf counter)
44           (let ((p (car (+parse-the-fun env))))
45             ;; Parse the `env`, count new lines in the align env as equations, unless
46             (cl-incf counter (- (or (plist-get p :newline) 0)
47                                   (or (plist-get p :nonumber) 0))))
48           (cons begin counter))
49          (t
50           (cons begin nil))))
51     (when-let ((number (cdr (assoc (point) results))))
52       (setf (car args)
53             (concat
54              (format "\\setcounter{equation}{%s}\\n" number)
55              (car args))))
56     (apply orig-func args))
57
58 (defun +scimax-toggle-latex-equation-numbering (&optional enable)
59   "Toggle whether LaTeX fragments are numbered."
60   (interactive)
61   (if (or enable (not (get '+scimax-org-renumber-environment 'enabled)))
62       (progn
63         (advice-add 'org-create-formula-image :around #' +scimax-org-renumber-environment)
64         (put '+scimax-org-renumber-environment 'enabled t)
65         (message "LaTeX numbering enabled.))
66       (advice-remove 'org-create-formula-image #' +scimax-org-renumber-environment)
67       (put '+scimax-org-renumber-environment 'enabled nil)
68       (message "LaTeX numbering disabled.)))
69
70 (defun +scimax-org-inject-latex-fragment (orig-func &rest args)
71   "Advice function to inject latex code before and/or after the equation in a latex fragment.
72   You can use this to set \\mathversion{bold} for example to make

```

```

77 it bolder. The way it works is by defining
78 :latex-fragment-pre-body and/or :latex-fragment-post-body in the
79 variable `org-format-latex-options'. These strings will then be
80 injected before and after the code for the fragment before it is
81 made into an image."
82 (setf (car args)
83       (concat
84         (or (plist-get org-format-latex-options :latex-fragment-pre-body) "")
85         (car args)
86         (or (plist-get org-format-latex-options :latex-fragment-post-body) "")))
87 (apply orig-func args))
88
89 (defun +scimax-toggle-inject-latex ()
90   "Toggle whether you can insert latex in fragments."
91   (interactive)
92   (if (not (get '+scimax-org-inject-latex-fragment 'enabled))
93       (progn
94         (advice-add 'org-create-formula-image :around #' +scimax-org-inject-latex-fragment)
95         (put '+scimax-org-inject-latex-fragment 'enabled t)
96         (message "Inject latex enabled"))
97       (advice-remove 'org-create-formula-image #' +scimax-org-inject-latex-fragment)
98       (put '+scimax-org-inject-latex-fragment 'enabled nil)
99       (message "Inject latex disabled"))))
100
101 ;; Enable renumbering by default
102 (+scimax-toggle-latex-equation-numbering t)

```

Fragtog Hook org-fragtog-mode to org-mode.

```

1 (use-package! org-fragtog
2   :hook (org-mode . org-fragtog-mode))

```

Org plot We can use some variables in org-plot to use the current doom theme colors.

```

1 (after! org-plot
2   (defun org-plot/generate-theme (_type)
3     "Use the current Doom theme colours to generate a GnuPlot preamble."
4     (format "
5 fgt = \"textcolor rgb '%s'\" # foreground text
6 fgat = \"textcolor rgb '%s'\" # foreground alt text
7 fgl = \"linecolor rgb '%s'\" # foreground line
8 fgal = \"linecolor rgb '%s'\" # foreground alt line
9
10 # foreground colors
11 set border lc rgb '%s'
12 # change text colors of tics
13 set xtics @fgt
14 set ytics @fgt
15 # change text colors of labels
16 set title @fgt
17 set xlabel @fgt
18 set ylabel @fgt
19 # change a text color of key
20 set key @fgt
21
22 # line styles
23 set linetype 1 lw 2 lc rgb '%s' # red
24 set linetype 2 lw 2 lc rgb '%s' # blue
25 set linetype 3 lw 2 lc rgb '%s' # green
26 set linetype 4 lw 2 lc rgb '%s' # magenta
27 set linetype 5 lw 2 lc rgb '%s' # orange
28 set linetype 6 lw 2 lc rgb '%s' # yellow
29 set linetype 7 lw 2 lc rgb '%s' # teal
30 set linetype 8 lw 2 lc rgb '%s' # violet

```



```

31
32 # palette
33 set palette maxcolors 8
34 set palette defined ( 0 '%s',\
35 1 '%s',\
36 2 '%s',\
37 3 '%s',\
38 4 '%s',\
39 5 '%s',\
40 6 '%s',\
41 7 '%s' )
42 "
43         (doom-color 'fg)
44         (doom-color 'fg-alt)
45         (doom-color 'fg)
46         (doom-color 'fg-alt)
47         (doom-color 'fg)
48         ;; colours
49         (doom-color 'red)
50         (doom-color 'blue)
51         (doom-color 'green)
52         (doom-color 'magenta)
53         (doom-color 'orange)
54         (doom-color 'yellow)
55         (doom-color 'teal)
56         (doom-color 'violet)
57         ;; duplicated
58         (doom-color 'red)
59         (doom-color 'blue)
60         (doom-color 'green)
61         (doom-color 'magenta)
62         (doom-color 'orange)
63         (doom-color 'yellow)
64         (doom-color 'teal)
65         (doom-color 'violet)))
66
67 (defun org-plot/gnuplot-term-properties (_type)
68   (format "background rgb '%s' size 1050,650"
69     (doom-color 'bg)))
70
71 (setq org-plot/gnuplot-script-preamble #'org-plot/generate-theme
72       org-plot/gnuplot-term-extra #'org-plot/gnuplot-term-properties))

```

Large tables Use *Partial Horizontal Scroll* to display long tables without breaking them.

```

1 (use-package! org-phscroll
2   :hook (org-mode . org-phscroll-mode))

```

9.2.5 Bibliography

```

1 (setq bibtex-completion-bibliography +my/biblio-libraries-list
2       bibtex-completion-library-path +my/biblio-storage-list
3       bibtex-completion-notes-path +my/biblio-notes-path
4       bibtex-completion-notes-template-multiple-files "*" ${author-or-editor}, ${title}, ${journal}, (${year})
↪   :${type}=: \n\nSee [[cite:&${key=}]]\n"
5       bibtex-completion-additional-search-fields '(keywords)
6       bibtex-completion-display-formats
7       '((article      . "${has-pdf=:1}${has-note=:1} ${year:4} ${author:36} ${title:*} ${journal:40}")
8         (inbook       . "${has-pdf=:1}${has-note=:1} ${year:4} ${author:36} ${title:*} Chapter
↪   ${chapter:32}")
9         (incollection . "${has-pdf=:1}${has-note=:1} ${year:4} ${author:36} ${title:*} ${booktitle:40}")
10        (inproceedings . "${has-pdf=:1}${has-note=:1} ${year:4} ${author:36} ${title:*} ${booktitle:40}")

```

```

11      (t . "${=has-pdf=:1}${=has-note=:1} ${year:4} ${author:36} ${title:*}")
12      bibtex-completion-pdf-open-function
13      (lambda (fpath)
14        (call-process "open" nil 0 nil fpath)))

```

BibTeX

Org-bib A mode to work with annotated bibliography in Org-Mode. See the repo for an example.

```

1 (use-package! org-bib
2   :commands (org-bib-mode))

```

```

1 (after! oc
2   (setq org-cite-csl-styles-dir +my/biblio-styles-path)
3         ;; org-cite-global-bibliography +my/biblio-libraries-list)
4
5   (defun +org-ref-to-org-cite ()
6     "Simple conversion of org-ref citations to org-cite syntax."
7     (interactive)
8     (save-excursion
9       (goto-char (point-min))
10      (while (re-search-forward "\\[cite\\(.*\\):\\([~]*\\)" nil t)
11        (let* ((old (substring (match-string 0) 1 (1- (length (match-string 0)))))
12              (new (s-replace "&" "@" old)))
13          (message "Replaced citation %s with %s" old new)
14          (replace-match new))))))

```

Org-cite

```

1 (after! citar
2   (setq citar-library-paths +my/biblio-storage-list
3         citar-notes-paths (list +my/biblio-notes-path)
4         citar-bibliography +my/biblio-libraries-list
5         citar-symbol-separator " ")
6
7   (when (display-graphic-p)
8     (setq citar-symbols
9       `((file ,(all-the-icons-octicon "file-pdf" :face 'error) . " ")
10         (note ,(all-the-icons-octicon "file-text" :face 'warning) . " ")
11         (link ,(all-the-icons-octicon "link-external" :face 'org-link) . " "))))))
12
13 (use-package! citar-org-roam
14   :after citar org-roam
15   :no-require
16   :config (citar-org-roam-mode)
17   :init
18   ;; Modified form: https://jethrokuan.github.io/org-roam-guide/
19   (defun +org-roam-node-from-cite (entry-key)
20     (interactive (list (citar-select-ref)))
21     (let ((title (citar-format--entry
22                  "${author editor} (${date urldate}) :: ${title}"
23                  (citar-get-entry entry-key))))
24       (org-roam-capture- :templates
25         '(("r" "reference" plain
26           "%?"
27           :if-new (file+head "references/${citekey}.org"
28                             ":properties:
29 :roam_refs: [cite:@${citekey}]

```

```

30 :end:
31 #+title: ${title}\n")
32           :immediate-finish t
33           :unnarrowed t))
34 :info (list :citekey entry-key)
35 :node (org-roam-node-create :title title)
36 :props '(:finalize find-file))))

```

Citar

9.2.6 Exporting

General settings By default, Org only exports the first three levels of headings as *headings*, the rest is considered as paragraphs. Let's increase this to 5 levels.

```

1 (setq org-export-headline-levels 5)

```

Let's make use of the `:ignore:` tag from `ox-extra`, which provides a way to ignore exporting a heading, while exporting the content residing under it (different from `:noexport:`).

```

1 (require 'ox-extra)
2 (ox-extras-activate '(ignore-headlines))

```

```

1 (setq org-export-creator-string
2   (format "Made with Emacs %s and Org %s" emacs-version (org-release)))

```

L^AT_EX export

```

1 ;; `org-latex-compilers' contains a list of possible values for the `%latex' argument.
2 (setq org-latex-pdf-process
3   '("latexmk -shell-escape -pdf -quiet -f -%latex -interaction=nonstopmode -output-directory=%o %f"))

```

Compiling

```

1 ;; 'svg' package depends on inkscape, imagemagick and ghostscript
2 (when (+all (mapcar 'executable-find '("inkscape" "magick" "gs"))))
3   (add-to-list 'org-latex-packages-alist '("" "svg")))
4
5 (add-to-list 'org-latex-packages-alist '("svgnames" "xcolor"))
6 ;; (add-to-list 'org-latex-packages-alist '("" "fontspec")) ;; for xelatex
7 ;; (add-to-list 'org-latex-packages-alist '("utf8" "inputenc"))

```

Org L^AT_EX packages

Export PDFs with syntax highlighting This is for code syntax highlighting in export. You need to use `-shell-escape` with latex, and install the `python-pygments` package.

```

1 ;; Should be configured per document, as a local variable
2 ;; (setq org-latex-listings 'minted)
3 ;; (add-to-list 'org-latex-packages-alist '("" "minted"))
4

```

```

5 ;; Default `minted` options, can be overwritten in file/dir locals
6 (setq org-latex-minted-options
7   '(("frame"          "lines")
8     ("fontsize"       "\\footnotesize")
9     ("tabsize"        "2")
10    ("breaklines"      "true")
11    ("breakanywhere"   "true") ;; break anywhere, no just on spaces
12    ("style"           "default")
13    ("bgcolor"         "GhostWhite")
14    ("linenos"         "true")))
15
16 ;; Link some org-mode blocks languages to lexers supported by minted
17 ;; via (pygmentize), you can see supported lexers by running this command
18 ;; in a terminal: `pygmentize -L lexers`
19 (dolist (pair '((ipython    "python")
20                 (jupyter    "python")
21                 (scheme     "scheme")
22                 (lisp-data   "lisp")
23                 (conf-unix   "unixconfig")
24                 (conf-space  "unixconfig")
25                 (authinfo    "unixconfig")
26                 (gdb-script  "unixconfig")
27                 (conf-toml   "yaml")
28                 (conf        "ini")
29                 (gitconfig   "ini")
30                 (systemd     "ini"))))
31   (unless (member pair org-latex-minted-langs)
32     (add-to-list 'org-latex-minted-langs pair)))

```

```

1 (after! ox-latex
2   (add-to-list
3     'org-latex-classes
4     '("scr-article"
5       "\\documentclass{scrartcl}"
6       ("\\section{%s}" . "\\section*{%s}")
7       ("\\subsection{%s}" . "\\subsection*{%s}")
8       ("\\subsubsection{%s}" . "\\subsubsection*{%s}")
9       ("\\paragraph{%s}" . "\\paragraph*{%s}")
10      ("\\subparagraph{%s}" . "\\subparagraph*{%s}"))))
11
12   (add-to-list
13     'org-latex-classes
14     '("lettre"
15       "\\documentclass{lettre}"
16       ("\\section{%s}" . "\\section*{%s}")
17       ("\\subsection{%s}" . "\\subsection*{%s}")
18       ("\\subsubsection{%s}" . "\\subsubsection*{%s}")
19       ("\\paragraph{%s}" . "\\paragraph*{%s}")
20       ("\\subparagraph{%s}" . "\\subparagraph*{%s}"))))
21
22   (add-to-list
23     'org-latex-classes
24     '("blank"
25       "[NO-DEFAULT-PACKAGES] \\n[NO-PACKAGES] \\n[EXTRA]"
26       ("\\section{%s}" . "\\section*{%s}")
27       ("\\subsection{%s}" . "\\subsection*{%s}")
28       ("\\subsubsection{%s}" . "\\subsubsection*{%s}")
29       ("\\paragraph{%s}" . "\\paragraph*{%s}")
30       ("\\subparagraph{%s}" . "\\subparagraph*{%s}"))))
31
32   (add-to-list
33     'org-latex-classes
34     '("IEEEtran"
35       "\\documentclass{IEEEtran}"
36       ("\\section{%s}" . "\\section*{%s}"))

```

```

37 ("\\subsection{%s}" . "\\subsection*{%s}")
38 ("\\subsubsection{%s}" . "\\subsubsection*{%s}")
39 ("\\paragraph{%s}" . "\\paragraph*{%s}")
40 ("\\subparagraph{%s}" . "\\subparagraph*{%s}"))
41
42 (add-to-list
43 'org-latex-classes
44 '("ieeeconf"
45   "\\documentclass{ieeeconf}"
46   ("\\section{%s}" . "\\section*{%s}")
47   ("\\subsection{%s}" . "\\subsection*{%s}")
48   ("\\subsubsection{%s}" . "\\subsubsection*{%s}")
49   ("\\paragraph{%s}" . "\\paragraph*{%s}")
50   ("\\subparagraph{%s}" . "\\subparagraph*{%s}"))))
51
52 (add-to-list
53 'org-latex-classes
54 '("sagej"
55   "\\documentclass{sagej}"
56   ("\\section{%s}" . "\\section*{%s}")
57   ("\\subsection{%s}" . "\\subsection*{%s}")
58   ("\\subsubsection{%s}" . "\\subsubsection*{%s}")
59   ("\\paragraph{%s}" . "\\paragraph*{%s}")
60   ("\\subparagraph{%s}" . "\\subparagraph*{%s}"))))
61
62 (add-to-list
63 'org-latex-classes
64 '("thesis"
65   "\\documentclass[11pt]{book}"
66   ("\\chapter{%s}" . "\\chapter*{%s}")
67   ("\\section{%s}" . "\\section*{%s}")
68   ("\\subsection{%s}" . "\\subsection*{%s}")
69   ("\\subsubsection{%s}" . "\\subsubsection*{%s}")
70   ("\\paragraph{%s}" . "\\paragraph*{%s}"))))
71
72 (add-to-list
73 'org-latex-classes
74 '("thesis-fr"
75   "\\documentclass[french,12pt,a4paper]{book}"
76   ("\\chapter{%s}" . "\\chapter*{%s}")
77   ("\\section{%s}" . "\\section*{%s}")
78   ("\\subsection{%s}" . "\\subsection*{%s}")
79   ("\\subsubsection{%s}" . "\\subsubsection*{%s}")
80   ("\\paragraph{%s}" . "\\paragraph*{%s}"))))
81
82 (setq org-latex-default-class "article")
83
84 ;; org-latex-tables-booktabs t
85 ;; org-latex-reference-command "\\cref{%s}")

```

Class templates

Export multi-files Org documents Let's say we have a multi-files document, with `main.org` as the entry point. Supposing a document with a structure like this:

Files `intro.org`, `chap1.org`, ... are included in `main.org` using the Org command `.` In such a setup, we will spend most of our time writing in a chapter files, and not the `main.org`, where when want to export the document, we would need to open the top-level file `main.org` before exporting.

A quick solution is **to admit the following convention**:

If a file named `main.org` is present beside any other Org file, it should be considered as the entry point; and whenever we export to PDF (from any of the Org files like: `intro.org`, `chap1.org`, ...), we automatically jump to the `main.org`, and run the export there.

This can be achieved by adding an Emacs-Lisp *advice* around the `(org-latex-export-to-pdf)` to switch to `main.org` (if it exists) before running the export.

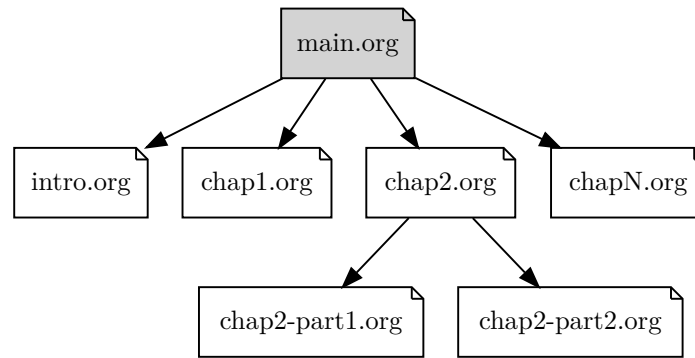


Figure 1: Example of a multi-files document structure

You can also set the variable `+org-export-to-pdf-main-file` to the main file, in `.dir-locals.el` or as a file local variable.

```

1 (defvar +org-export-to-pdf-main-file nil
2   "The main (entry point) Org file for a multi-files document.")
3
4 (advice-add
5   'org-latex-export-to-pdf :around
6   (lambda (orig-fn &rest orig-args)
7     (message
8       "PDF exported to: %s."
9       (let ((main-file (or (bound-and-true-p +org-export-to-pdf-main-file) "main.org")))
10         (if (file-exists-p (expand-file-name main-file))
11             (with-current-buffer (find-file-noselect main-file)
12               (apply orig-fn orig-args))
13             (apply orig-fn orig-args)))))))

```

Hugo Update files with last modified date, when `#+lastmod:` is available

```

1 (setq time-stamp-active t
2       time-stamp-start "#\\+lastmod:[ \\t]*"
3       time-stamp-end "$"
4       time-stamp-format "%04Y-%02m-%02d")
5
6 (add-hook 'before-save-hook 'time-stamp nil)
7 (setq org-hugo-auto-set-lastmod t)

```

9.3 Text editing

9.3.1 Plain text

It's nice to see ANSI color codes displayed. However, until Emacs 28 it's not possible to do this without modifying the buffer, so let's condition this block on that.

```

1 (after! text-mode
2   (add-hook! 'text-mode-hook
3     (unless (derived-mode-p 'org-mode)
4       ;; Apply ANSI color codes
5       (with-silent-modifications
6         (ansi-color-apply-on-region (point-min) (point-max) t))))))

```

9.3.2 Academic phrases

When writing your academic paper, you might get stuck trying to find the right phrase that captures your intention. This package tries to alleviate that problem by presenting you with a list of phrases organized by the topic or by the paper section that you are writing. This package has around 600 phrases so far.

This is based on the book titled “English for Writing Research - Papers Useful Phrases”.

```
1 (use-package! academic-phrases
2   :commands (academic-phrases
3             academic-phrases-by-section))
```

9.3.3 Quarto

Integration of Quarto in Emacs.

```
1 (package! quarto-mode)
```

```
1 (use-package! quarto-mode
2   :when QUARTO-P)
```

9.3.4 French apostrophes

```
1 (defun +helper--in-buffer-replace (old new)
2   "Replace OLD with NEW in the current buffer."
3   (save-excursion
4     (goto-char (point-min))
5     (let ((case-fold-search nil)
6           (cnt 0))
7       (while (re-search-forward old nil t)
8         (replace-match new)
9         (setq cnt (1+ cnt))))
10    cnt)))
11
12 (defun +helper-clear-frenchy-punctuations ()
13   "Replace french apostrophes (') by regular quotes (')."
14   (interactive)
15   (let ((chars '("(" " " . "")) (',' " " . "")))
16     (cnt 0))
17   (dolist (pair chars)
18     (setq cnt (+ cnt (+helper--in-buffer-replace (car pair) (cdr pair)))))
19   (message "Replaced %d matche(s)." cnt)))
```

9.3.5 Yanking multi-lines paragraphs

```
1 (defun +helper-paragraphized-yank ()
2   "Copy, then remove newlines and Org styling (/*_~)."
3   (interactive)
4   (copy-region-as-kill nil nil t)
5   (with-temp-buffer
6     (yank)
7     ;; Remove newlines, and Org styling (/*_~)
8     (goto-char (point-min))
9     (let ((case-fold-search nil))
10      (while (re-search-forward "[\n/*_~]" nil t)
11        (replace-match (if (s-matches-p (match-string 0) "\n") " " "" t)))
12      (kill-region (point-min) (point-max))))
13
```

```

14 (map! :localleader
15      :map (org-mode-map markdown-mode-map latex-mode-map text-mode-map)
16      :desc "Paragraphized yank" "y" #'helper-paragraphized-yank)

```

10 System configuration

10.1 Mime types

10.1.1 Org mode files

Org mode isn't recognized as its own mime type by default, but that can easily be changed with the following file. For system-wide changes try `/usr/share/mime/packages/org.xml`.

```

1 <mime-info xmlns='http://www.freedesktop.org/standards/shared-mime-info'>
2   <mime-type type="text/org">
3     <comment>Emacs Org-mode File</comment>
4     <glob pattern="*.org"/>
5     <alias type="text/org"/>
6   </mime-type>
7 </mime-info>

```

What's nice is that Papirus now has an icon for `text/org`. One simply needs to refresh their mime database:

```

1 update-mime-database ~/.local/share/mime

```

Then set Emacs as the default editor:

```

1 xdg-mime default emacs-client.desktop text/org

```

10.1.2 Registering `org-protocol://`

The recommended method of registering a protocol is by registering a desktop application, which seems reasonable.

```

1 [Desktop Entry]
2 Name=Emacs Org-Protocol
3 Exec=emacsclient %u
4 Icon=/home/hacko/.doom.d/assets/org-mode.svg
5 Type=Application
6 Terminal=false
7 MimeType=x-scheme-handler/org-protocol

```

To associate `org-protocol://` links with the desktop file:

```

1 xdg-mime default org-protocol.desktop x-scheme-handler/org-protocol

```

10.1.3 Configuring Chrome/Brave

As specified in the official documentation, we would like to invoke the `org-protocol://` without confirmation. To do this, we need to add this system-wide configuration.

```

1 read -p "Do you want to set Chrome/Brave to show the 'Always open ...' checkbox, to be used with the
2 ↪ 'org-protocol://' registration? [Y | N]: " INSTALL_CONFIRM
3
4 if [[ "$INSTALL_CONFIRM" == "Y" ]]
5 then

```



```

5  sudo mkdir -p /etc/opt/chrome/policies/managed/
6
7  sudo tee /etc/opt/chrome/policies/managed/external_protocol_dialog.json > /dev/null <<'EOF'
8  {
9  "ExternalProtocolDialogShowAlwaysOpenCheckbox": true
10 }
11 EOF
12
13 sudo chmod 644 /etc/opt/chrome/policies/managed/external_protocol_dialog.json
14 fi

```

Then add a bookmarklet in your browser with this code:

```

1 javascript:location.href =
2   'org-protocol://roam-ref?template=r&ref='
3   + encodeURIComponent(location.href)
4   + '&title='
5   + encodeURIComponent(document.title)
6   + '&body='
7   + encodeURIComponent(window.getSelection())

```

10.2 Git

10.2.1 Git diffs

Based on this gist and this article.

```

1  *.tex           diff=tex
2  *.bib           diff=bibtex
3  *.{c,h,c++,h++,cc,hh,cpp,hpp} diff=cpp
4  *.m             diff=matlab
5  *.py            diff=python
6  *.rb            diff=ruby
7  *.php           diff=php
8  *.pl            diff=perl
9  *.{html,xhtml}  diff=html
10 *.f             diff=fortran
11 *.{el,lisp,scm}  diff=lisp
12 *.r             diff=rstats
13 *.texi*          diff=texinfo
14 *.org            diff=org
15 *.rs             diff=rust
16
17 *.odt            diff=odt
18 *.odp            diff=libreoffice
19 *.ods            diff=libreoffice
20 *.doc            diff=doc
21 *.xls            diff=xls
22 *.ppt            diff=ppt
23 *.docx           diff=docx
24 *.xlsx           diff=xlsx
25 *.pptx           diff=pptx
26 *.rtf            diff=rtf
27
28 *.{png,jpg,jpeg,gif} diff=exif
29
30 *.pdf            diff=pdf
31 *.djvu           diff=djvu
32 *.epub           diff=pandoc
33 *.chm            diff=tika
34 *.mhtml?         diff=tika
35
36 *.{class,jar}    diff=tika
37 *.{rar,7z,zip,apk} diff=tika

```

Then adding some regular expressions for it to `~/.config/git/config`, with some tools to view diffs on binary files.

```

1 # ===== TEXT FORMATS =====
2 [diff "org"]
3     xfuncname = "^(\\"*+ +.*)"
4
5 [diff "lisp"]
6     xfuncname = "^(\\"(.*)"
7
8 [diff "rstats"]
9     xfuncname = "^([a-zA-Z.] + <- function.*)$"
10
11 [diff "texinfo"]
12 # from http://git.savannah.gnu.org/gitweb/?p=coreutils.git;a=blob;f=.gitattributes;h=c3b2926c78c939d94358cc63d05
13 ↪ 1a70d38cfea5d;hb=HEAD
14     xfuncname = "@node[ \t][ \t]*\\([^\t,]*\\)"
15
16 [diff "rust"]
17     xfuncname = "[ \t]*(pub|)[ \t]*((fn|struct|enum|impl|trait|mod)[^;]*)$"
18
19 # ===== BINARY FORMATS =====
20 [diff "pdf"]
21     binary = true
22 # textconv = pdfinfo
23 # textconv = sh -c 'pdftotext "$@" -' # sudo apt install pdftotext
24     textconv = sh -c 'pdftotext -layout "$0" -enc UTF-8 -nopgbrk -q -'
25     cachetextconv = true
26
27 [diff "djvu"]
28     binary = true
29 # textconv = pdfinfo
30     textconv = djvutxt # yay -S djvulibre
31     cachetextconv = true
32
33 [diff "odt"]
34     textconv = odt2txt
35 # textconv = pandoc --standalone --from=odt --to=plain
36     binary = true
37     cachetextconv = true
38
39 [diff "doc"]
40 # textconv = wvText
41     textconv = catdoc # yay -S catdoc
42     binary = true
43     cachetextconv = true
44
45 [diff "xls"]
46 # textconv = in2csv
47 # textconv = xls2csv -a UTF-8
48 # textconv = soffice --headless --convert-to csv
49     textconv = xls2csv # yay -S catdoc
50     binary = true
51     cachetextconv = true
52
53 [diff "ppt"]
54     textconv = catppt # yay -S catdoc
55     binary = true
56     cachetextconv = true
57
58 [diff "docx"]
59     textconv = pandoc --standalone --from=docx --to=plain
60 # textconv = sh -c 'docx2txt.pl "$0" -'
61     binary = true
62     cachetextconv = true
63
64 [diff "xlsx"]
65     textconv = xlsx2csv # pip install xlsx2csv
66 # textconv = in2csv

```

```

66 # textconv = soffice --headless --convert-to csv
67     binary = true
68     cachetextconv = true
69
70 [diff "pptx"]
71 # pip install --user pptx2md (currently not working with Python 3.10)
72 # textconv = sh -c 'pptx2md --disable_image --disable_wmf -i "$0" -o ~/.cache/git/presentation.md >/dev/null &&
73 ↪ cat ~/.cache/git/presentation.md'
74 # Alternative hack, convert PPTX to PPT, then use the catppt tool
75 textconv = sh -c 'soffice --headless --convert-to ppt --outdir /tmp "$0" && TMP_FILENAME=$(basename -- "$0")
76 ↪ && catppt "/tmp/${TMP_FILENAME%.*}.ppt"'
77     binary = true
78     cachetextconv = true
79
80 [diff "rtf"]
81 textconv = unrtf --text # yay -S unrtf
82     binary = true
83     cachetextconv = true
84
85 [diff "epub"]
86 textconv = pandoc --standalone --from=epub --to=plain
87     binary = true
88     cachetextconv = true
89
90 [diff "tika"]
91 textconv = tika --config=~/.local/share/tika/tika-conf.xml --text
92     binary = true
93     cachetextconv = true
94
95 [diff "libreoffice"]
96 textconv = soffice --cat
97     binary = true
98     cachetextconv = true
99
100 [diff "exif"]
101     binary = true
102     textconv = exiftool # sudo apt install perl-image-exiftool

```

10.2.2 Apache Tika App wrapper

Apache Tika is a content detection and analysis framework. It detects and extracts metadata and text from over a thousand different file types. We will be using the Tika App in command-line mode to show some meaningful diff information for some binary files.

First, let's add a custom script to run `tika-app`:

```

1  #!/bin/sh
2  APACHE_TIKA_JAR="$HOME/.local/share/tika/tika-app.jar"
3
4  if [ -f "${APACHE_TIKA_JAR}" ]
5  then
6      exec java -Dfile.encoding=UTF-8 -jar "${APACHE_TIKA_JAR}" "$@" 2>/dev/null
7  else
8      echo "JAR file not found at ${APACHE_TIKA_JAR}"
9  fi

```

Add tika's installation instructions to the `setup.sh` file.

```

1  update_apache_tika () {
2      TIKA_JAR_PATH="$HOME/.local/share/tika"
3
4      if [ ! -d "${TIKA_JAR_PATH}" ]
5      then
6          mkdir -p "${TIKA_JAR_PATH}"
7      fi
8  }

```

```

9  TIKA_BASE_URL=https://archive.apache.org/dist/tika/
10 TIKA_JAR_LINK="${TIKA_JAR_PATH}/tika-app.jar"
11
12 echo -n "Checking for new Apache Tika App version... "
13
14 # Get the latest version
15 TIKA_VERSION=$(
16     curl -s "${TIKA_BASE_URL}" | # Get the page
17     pandoc -f html -t plain | # Convert HTML page to plain text.
18     awk '/([0-9]+\.[0-1])\// {print substr($1, 0, length($1)-1)}' | # Get the versions directories (pattern:
19     ↪ X.X.X/)
20     sort -rV | # Sort versions, the newest first
21     head -n 1 # Get the first (newest) version
22 )
23
24 if [ -z "${TIKA_VERSION}" ]
25 then
26     echo "Failed, check your internet connection."
27     exit 1
28 fi
29
30 echo "Latest version is ${TIKA_VERSION}"
31
32 TIKA_JAR="${TIKA_JAR_PATH}/tika-app-${TIKA_VERSION}.jar"
33 TIKA_JAR_URL="${TIKA_BASE_URL}${TIKA_VERSION}/tika-app-${TIKA_VERSION}.jar"
34
35 if [ ! -f "${TIKA_JAR}" ]
36 then
37     echo "New version available!"
38     read -p "Do you want to download Apache Tika App v${TIKA_VERSION}? [Y | N]: " INSTALL_CONFIRM
39     if [[ "$INSTALL_CONFIRM" == "Y" ]]
40     then
41         curl -o "${TIKA_JAR}" "${TIKA_JAR_URL}" && echo "Apache Tika App v${TIKA_VERSION} downloaded successfully"
42     fi
43 else
44     echo "Apache Tika App is up-to-date, version ${TIKA_VERSION} already downloaded to '${TIKA_JAR}'"
45 fi
46
47 # Check the existence of the symbolic link
48 if [ -L "${TIKA_JAR_LINK}" ]
49 then
50     unlink "${TIKA_JAR_LINK}"
51 fi
52
53 # Create a symbolic link to the installed version
54 ln -s "${TIKA_JAR}" "${TIKA_JAR_LINK}"
55 }
56
57 update_apache_tika;

```

When it detects that Tesseract is installed, Tika App will try to extract text from some file types. For some reason, it tries to use Tesseract with some compressed files like *.bz2, *.apk... etc. I would like to disable this feature by exporting an XML config file which will be used when launching the Tika App (using `--config=tika-config.xml`).

```

1  <?xml version="1.0" encoding="UTF-8"?>
2  <properties>
3  <parsers>
4      <parser class="org.apache.tika.parser.DefaultParser">
5          <parser-exclude class="org.apache.tika.parser.ocr.TesseractOCRParser"/>
6      </parser>
7  </parsers>
8  </properties>

```

10.3 Emacs' Systemd daemon

Let's define a Systemd service to launch Emacs server automatically.

```

1 [Unit]
2 Description=Emacs server daemon
3 Documentation=info:emacs man:emacs(1) https://gnu.org/software/emacs/
4
5 [Service]
6 Type=forking
7 ExecStart=sh -c 'emacs --daemon && emacsclient -c --eval "(delete-frame)'"
8 ExecStop=emacsclient --no-wait --eval "(progn (setq kill-emacs-hook nil) (kill-emacs))"
9 Restart=on-failure
10
11 [Install]
12 WantedBy=default.target

```

Which is then enabled by:

```

1 systemctl --user enable emacs.service

```

For some reason if a frame isn't opened early in the initialization process, the daemon doesn't seem to like opening frames later — hence the `&& emacsclient` part of the `ExecStart` value.

10.4 Emacs client

10.4.1 Desktop integration

It can now be nice to use this as a 'default app' for opening files. If we add an appropriate desktop entry, and enable it in the desktop environment.

```

1 [Desktop Entry]
2 Name=Emacs (Client)
3 GenericName=Text Editor
4 Comment=A flexible platform for end-user applications
5 MimeType=text/english;text/plain;text/org;text/x-makefile;text/x-c++hdr;text/x-c++src;text/x-chdr;text/x-csrc;text/x-c;
6 ↪ ext/x-java;text/x-moc;text/x-pascal;text/x-tcl;text/x-tex;application/x-shellscript;text/x-c;text/x-c++;
7 Exec=emacsclient -create-frame --frame-parameters="(fullscreen . maximized)"
8 ↪ --alternate-editor="/usr/bin/emacs" --no-wait %F
9 Icon=emacs
10 Type=Application
11 Terminal=false
12 Categories=TextEditor;Utility;
13 StartupWMClass=Emacs
14 Keywords=Text;Editor;
15 X-KDE-StartupNotify=false

```

10.4.2 Command-line wrapper

A wrapper around `emacsclient`:

- Accepting `stdin` by putting it in a temporary file and immediately opening it.
- Guessing that the `tty` is a good idea when `$DISPLAY` is unset (relevant with SSH sessions, among other things).
- With a whiff of 24-bit color support, sets `TERM` variable to a `terminfo` that (probably) announces 24-bit color support.
- Changes GUI `emacsclient` instances to be non-blocking by default (`--no-wait`), and instead take a flag to suppress this behavior (`-w`).

I would use `sh`, but using arrays for argument manipulation is just too convenient, so I'll raise the requirement to `bash`. Since arrays are the only 'extra' compared to `sh`, other shells like `ksh` etc. should work too.

```

1  #!/usr/bin/env bash
2  force_tty=false
3  force_wait=false
4  stdin_mode=""
5
6  args=()
7
8  usage () {
9      echo -e "Usage: e [-t] [-m MODE] [OPTIONS] FILE [-]"
10
11      Emacs client convenience wrapper.
12
13      Options:
14      -h, --help           Show this message
15      -t, -nw, --tty       Force terminal mode
16      -w, --wait           Don't supply --no-wait to graphical emacsclient
17      -                     Take stdin (when last argument)
18      -m MODE, --mode MODE Mode to open stdin with
19      -mm, --maximized     Start Emacs client in maximized window
20
21      Run emacsclient --help to see help for the emacsclient."
22  }
23
24  while :
25  do
26      case "$1" in
27          -t | -nw | --tty)
28              force_tty=true
29              shift ;;
30          -w | --wait)
31              force_wait=true
32              shift ;;
33          -m | --mode)
34              stdin_mode=" ($2-mode)"
35              shift 2 ;;
36          -mm | --maximized)
37              args+=("--frame-parameters='(fullscreen . maximized)")
38              shift ;;
39          -h | --help)
40              usage
41              exit 0 ;;
42          --*=*)
43              set -- "$@" "${1%*=*}" "${1#*=*}"
44              shift ;;
45          *)
46              [ "$#" = 0 ] && break
47              args+=("$1")
48              shift ;;
49      esac
50  done
51
52  if [ ! "${#args[*]}" = 0 ] && [ "${args[-1]}" = "-" ]
53  then
54      unset 'args[-1]'
55      TMP="$(mktemp /tmp/emacsstdin-XXX)"
56      cat > "$TMP"
57      args+=(--eval "(let ((b (generate-new-buffer \"*stdin*\"))) (switch-to-buffer b) (insert-file-contents
58      ↪ \"\$TMP\") (delete-file \"\$TMP\")${stdin_mode}))")
59  fi
60
61  if [ -z "$DISPLAY" ] || $force_tty
62  then
63      # detect terminals with sneaky 24-bit support
64      if { [ "$COLORTERM" = truecolor ] || [ "$COLORTERM" = 24bit ]; } \
65      && [ "$(tput colors 2>/dev/null)" -lt 257 ]
66      then
67          if echo "$TERM" | grep -q "^\\w\\+-[0-9]"

```

```

67     then
68         termstub="${TERM%*-}"
69     else
70         termstub="${TERM#*-}"
71     fi
72
73     if infocmp "$termstub-direct" >/dev/null 2>&1
74     then
75         TERM="$termstub-direct"
76     else
77         TERM="xterm-direct"
78     fi # should be fairly safe
79 fi
80
81 emacsclient --tty -create-frame --alternate-editor="/usr/bin/emacs" "${args[@]}"
82 else
83     if ! $force_wait
84     then
85         args+=(--no-wait)
86     fi
87
88     emacsclient -create-frame --alternate-editor="/usr/bin/emacs" "${args[@]}"
89 fi

```

Useful aliases Now, to set an alias to use `e` with `magit`, and then for maximum laziness we can set aliases for the terminal-forced variants.

```

1  # Aliases to run emacs+magit
2  alias magit='e --eval "(progn (magit-status) (delete-other-windows))"'
3  alias magitt='e -t --eval "(progn (magit-status) (delete-other-windows))"'
4
5  # Aliases to run emacs+mu4e
6  alias emu='e --eval "(progn (=mu4e) (delete-other-windows))"'
7  alias emut='e -t --eval "(progn (=mu4e) (delete-other-windows))"'

```

And this to launch Emacs in terminal mode `et`, I use this as a default `$EDITOR`

```

1  #!/usr/bin/env bash
2  e -t "$@"

```

And `ev` for use with `$VISUAL`:

```

1  #!/usr/bin/env bash
2  e -w "$@"

```

```

1  export EDITOR="$HOME/.local/bin/et"
2  # export VISUAL="$HOME/.local/bin/ev"

```

10.5 LanguageTool server

```

1  [Unit]
2  Description=LanguageTool server
3  Documentation=https://laungaugetool.org
4
5  [Service]
6  Type=simple
7  ExecStart=languetool --http --languageModel /usr/share/ngrams
8  Restart=on-failure
9

```

```
[Install]
WantedBy=default.target
```

Which is then enabled by:

```
systemctl --user enable emacs.service
```

10.6 AppImage

Install/update the `appimageupdatetool.AppImage` tool:

```
update_appimageupdatetool () {
    TOOL_NAME=appimageupdatetool
    MACHINE_ARCH=$(uname -m)
    APPIMAGE_UPDATE_TOOL_PATH="$HOME/.local/bin/${TOOL_NAME}"
    APPIMAGE_UPDATE_TOOL_URL="https://github.com/AppImage/AppImageUpdate/releases/download/continuous/${TOOL_NAME}
↵ }-${MACHINE_ARCH}.AppImage"

    if [ -f "${APPIMAGE_UPDATE_TOOL_PATH}" ] && "${APPIMAGE_UPDATE_TOOL_PATH}" -j "${APPIMAGE_UPDATE_TOOL_PATH}"
↵ 2&>/dev/null
    then
        echo "${TOOL_NAME} already up to date"
    else
        if [ -f "${APPIMAGE_UPDATE_TOOL_PATH}" ]
        then
            echo "Update available, downloading latest ${MACHINE_ARCH} version to ${APPIMAGE_UPDATE_TOOL_PATH}"
            mv "${APPIMAGE_UPDATE_TOOL_PATH}" "${APPIMAGE_UPDATE_TOOL_PATH}.backup"
        else
            echo "${TOOL_NAME} not found, downloading latest ${MACHINE_ARCH} version to ${APPIMAGE_UPDATE_TOOL_PATH}"
        fi
        wget -O "${APPIMAGE_UPDATE_TOOL_PATH}" "${APPIMAGE_UPDATE_TOOL_URL}" && # 2&>/dev/null
        echo "Downloaded ${TOOL_NAME}-${MACHINE_ARCH}.AppImage" &&
        [ -f "${APPIMAGE_UPDATE_TOOL_PATH}.backup" ] &&
        rm "${APPIMAGE_UPDATE_TOOL_PATH}.backup"
        chmod a+x "${APPIMAGE_UPDATE_TOOL_PATH}"
    fi
}

update_appimageupdatetool;
```

10.7 Oh-my-Zsh

10.7.1 Path

Path to your oh-my-zsh installation.

```
export ZSH="$HOME/.oh-my-zsh"
```

10.7.2 Themes and customization:

Set name of the theme to load, if set to "random", it will load a random theme each time oh-my-zsh is loaded, in which case, to know which specific one was loaded, run: `echo $RANDOM_THEME` See github.com/ohmyzsh/ohmyzsh/wiki/Themes.

```
# Typewritten customizations
TYPEWRITTEN_RELATIVE_PATH="adaptive"
TYPEWRITTEN_CURSOR="underscore"

ZSH_THEME="typewritten/typewritten"
```



```

6
7 # Set list of themes to pick from when loading at random
8 # Setting this variable when ZSH_THEME=random will cause zsh to load
9 # a theme from this variable instead of looking in $ZSH/themes/
10 # If set to an empty array, this variable will have no effect.
11 # ZSH_THEME_RANDOM_CANDIDATES=( "robbyrussell" "agnoster" )

```

10.7.3 Behavior

```

1 # Uncomment the following line to use case-sensitive completion.
2 # CASE_SENSITIVE="true"
3
4 # Uncomment the following line to use hyphen-insensitive completion.
5 # Case-sensitive completion must be off. _ and - will be interchangeable.
6 # HYPHEN_INSENSITIVE="true"
7
8 # Uncomment the following line to disable bi-weekly auto-update checks.
9 # DISABLE_AUTO_UPDATE="true"
10
11 # Uncomment the following line to automatically update without prompting.
12 DISABLE_UPDATE_PROMPT="true"
13
14 # Uncomment the following line to change how often to auto-update (in days).
15 export UPDATE_ZSH_DAYS=3
16
17 # Uncomment the following line if pasting URLs and other text is messed up.
18 # DISABLE_MAGIC_FUNCTIONS="true"
19
20 # Uncomment the following line to disable colors in ls.
21 # DISABLE_LS_COLORS="true"
22
23 # Uncomment the following line to disable auto-setting terminal title.
24 # DISABLE_AUTO_TITLE="true"
25
26 # Uncomment the following line to enable command auto-correction.
27 # ENABLE_CORRECTION="true"
28
29 # Uncomment the following line to display red dots whilst waiting for completion.
30 # COMPLETION_WAITING_DOTS="true"
31
32 # Uncomment the following line if you want to disable marking untracked files
33 # under VCS as dirty. This makes repository status check for large repositories
34 # much, much faster.
35 # DISABLE_UNTRACKED_FILES_DIRTY="true"
36
37 # Uncomment the following line if you want to change the command execution time
38 # stamp shown in the history command output.
39 # You can set one of the optional three formats:
40 # "mm/dd/yyyy"|"dd.mm.yyyy"|"yyyy-mm-dd"
41 # or set a custom format using the strftime function format specifications,
42 # see 'man strftime' for details.
43 # HIST_STAMPS="mm/dd/yyyy"

```

10.7.4 Plugins

```

1 # Would you like to use another custom folder than $ZSH/custom?
2 ZSH_CUSTOM=$HOME/.config/my_ohmyzsh_customizations
3
4 # Which plugins would you like to load?
5 # Standard plugins can be found in $ZSH/plugins/
6 # Custom plugins may be added to $ZSH_CUSTOM/plugins/
7 # Example format: plugins=(rails git textmate ruby lighthouse)
8 # Add wisely, as too many plugins slow down shell startup.

```

```

9  plugins=(
10     zsh-autosuggestions
11     zsh-navigation-tools
12     zsh-interactive-cd
13     archlinux
14     ssh-agent
15     sudo
16     docker
17     systemd
18     tmux
19     python
20     pip
21     rust
22     repo
23     git
24     cp
25     rsync
26     ripgrep
27     fzf
28     fd
29     z
30 )

```

10.7.5 Bootstrap Oh-my-Zsh

```

1  source $ZSH/oh-my-zsh.sh

```

10.7.6 Aliases

```

1  # Aliases
2  alias zshconfig="vim ~/.zshrc"
3  alias ohmyzsh="ranger $ZSH"

```

10.8 Zsh user configuration

10.8.1 pbcopy and pbpaste

I like to define MacOS-like commands (**pbcopy** and **pbpaste**) to copy and paste in terminal (from **stdin**, to **stdout**). The **pbcopy** and **pbpaste** are defined using either **xclip** or **xsel**, you would need to install these tools, otherwise we wouldn't define the aliases.

```

1  # Define aliases to 'pbcopy' and 'pbpaste'
2  if command -v xclip &> /dev/null
3  then
4      # Define aliases using xclip
5      alias pbcopy='xclip -selection clipboard'
6      alias pbpaste='xclip -selection clipboard -o'
7  elif command -v xsel &> /dev/null
8  then
9      # Define aliases using xsel
10     alias pbcopy='xsel --clipboard --input'
11     alias pbpaste='xsel --clipboard --output'
12 fi

```

10.8.2 netpaste

Define a `netpaste` command to paste to a Pastebin server.

```
1 alias netpaste='curl -F file=@- 0x0.st' # OR 'curl -F f:1=<- ix.io '
```

10.8.3 Sudo GUI!

And then define `gsuon` and `gsuoff` aliases to run graphical apps from terminal with root permissions, this requires `xhost`.

```
1 # To run GUI apps from terminal with root permissions
2 if command -v xhost &> /dev/null
3 then
4     alias gsuon='xhost si:localuser:root'
5     alias gsuoff='xhost -si:localuser:root'
6 fi
```

10.8.4 Neovim

Use Neovim instead of VIM to provide `vi` and `vim` commands.

```
1 # NeoVim
2 if command -v nvim &> /dev/null
3 then
4     alias vim="nvim"
5     alias vi="nvim"
6 fi
```

10.8.5 ESP-IDF

Add some aliases to work with the ESP-IDF framework.

```
1 if [ -d "$HOME/Softwares/src/esp-idf/" ]
2 then
3     alias esp-prepare-env='source $HOME/Softwares/src/esp-idf/export.sh'
4     alias esp-update='echo "Updating ESP-IDF framework..." && cd $HOME/src/esp-idf && git pull --all && echo
5     ↪ "Updated successfully"'
6 else
7     alias esp-prepare-env='echo "esp-idf repo not found. You can clone the esp-idf repo using git clone
8     ↪ https://github.com/espressif/esp-idf.git"'
9     alias esp-update=esp-prepare-env
10 fi
```

10.8.6 CLI wttrin client

Define an alias to get weather information for my city:

```
1 export WTTRIN_CITY=Orsay
2
3 alias wttrin='curl wttr.in/$WTTRIN_CITY'
4 alias wttrin2='curl v2.wttr.in/$WTTRIN_CITY'
```

10.8.7 Minicom

Enable Meta key and colors in minicom:

```
1 export MINICOM='-m -c on'
```

10.8.8 Rust

Define Rust sources path, and add packages installed from cargo to the PATH.

```
1 export RUST_SRC_PATH=$HOME/.rustup/toolchains/stable-x86_64-unknown-linux-gnu/lib/rustlib/src/rust/src/
2 export PATH=$PATH:$HOME/.cargo/bin
```

I'm using the AUR package `clang-format-static-bin`, which provide multiple versions of Clang-format, I use it with some work projects requiring a specific version of Clang-format.

10.8.9 Clang-format

```
1 export PATH=$PATH:/opt/clang-format-static
```

10.8.10 CMake

Add my manually installed libraries to CMake and PATH.

```
1 export CMAKE_PREFIX_PATH=$HOME/Softwares/src/install
2 export PATH=$PATH:$HOME/Softwares/src/install/bin
```

10.8.11 Node

Set NPM installation path to local:

```
1 NPM_PACKAGES="${HOME}/.npm-packages"
2
3 # Export NPM bin path
4 export PATH="$PATH:$NPM_PACKAGES/bin"
5
6 # Preserve MANPATH if you already defined it somewhere in your config.
7 # Otherwise, fall back to `manpath` so we can inherit from `/etc/manpath`.
8 export MANPATH="${MANPATH-$(manpath)}:$NPM_PACKAGES/share/man"
9
10 # Tell Node about these packages
11 export NODE_PATH="$NPM_PACKAGES/lib/node_modules:$NODE_PATH"
```

Tell NPM to use this directory for its global package installs by adding this in `~/.npmrc`:

```
1 prefix = ~/.npm-packages
```

Some useful stuff (`fzf`, `opam`, `Doom Emacs`...)

10.8.12 tmux

I like to use `tmux` by default, even on my local sessions, I like to start a `tmux` in a `default` session on the first time I launch a terminal, and then, attach any other terminal to this default session:

```

1 # If not running inside Emacs (via vterm/eshell...)
2 if [ -z $INSIDE_MACS ]
3 then
4     if command -v tmux && /dev/null && [ -z "$TMUX" ]
5     then
6         tmux attach -t default || tmux new -s default
7     fi
8 fi

```

10.8.13 Other stuff

```

1 # You may need to manually set your language environment
2 # export LANG=en_US.UTF-8
3
4 # Preferred editor for local and remote sessions
5 # if [[ -n $SSH_CONNECTION ]]; then
6 #     export EDITOR='vim'
7 # else
8 #     export EDITOR='mvim'
9 # fi
10
11 # Compilation flags
12 # export ARCHFLAGS="-arch x86_64"
13
14 # FZF
15 [ -f ~/.fzf.zsh ] && source ~/.fzf.zsh
16
17 # OPAM configuration
18 [[ ! -r $HOME/.opam/opam-init/init.zsh ]] || source $HOME/.opam/opam-init/init.zsh > /dev/null 2> /dev/null
19
20 # Add ~/.config/emacs/bin to path (for DOOM Emacs stuff)
21 export PATH=$PATH:$HOME/.config/emacs/bin

```

Define some environment variables.

```

1 export DS_DIR=~/.PhD/datasets-no/experiment_images/
2 export DSO_BIN_DIR=~/.PhD/workspace-no/vo/orig/dso/build/release/bin
3 export DSO_RES_DIR=~/.PhD/workspace-no/vo/orig/dso_results

```

Load my bitwarden-cli session, exported to BW_SESSION.

```

1 source ~/.bitwarden-session

```

10.9 Rust format

For Rust code base, the file `$HOME/.rustfmt.toml` contains the global format settings, I like to set it to:

```

1 # Rust edition 2018
2 edition = "2018"
3
4 # Use Unix style newlines, with 2 spaces tabulation.
5 newline_style = "Unix"
6 tab_spaces = 2
7 hard_tabs = false
8
9 # Make one line functions in a single line
10 fn_single_line = true
11
12 # Format strings
13 format_strings = true
14

```

```

15 # Increase the max line width
16 max_width = 120
17
18 # Merge nested imports
19 merge_imports = true
20
21 # Enum and Struct alignment
22 enum_discrim_align_threshold = 20
23 struct_field_align_threshold = 20
24
25 # Reorder impl items: type > const > macros > methods.
26 reorder_impl_items = true
27
28 # Comments and documentation formating
29 wrap_comments = true
30 normalize_comments = true
31 normalize_doc_attributes = true
32 format_code_in_doc_comments = true
33 report_fixme = "Always"
34 todo = "Always"

```

10.10 eCryptfs

10.10.1 Unlock and mount script

```

1  #!/bin/sh -e
2  # This script mounts a user's confidential private folder
3  #
4  # Original by Michael Halcrow, IBM
5  # Extracted to a stand-alone script by Dustin Kirkland <kirkland@ubuntu.com>
6  # Modified by: Abdelhak Bougouffa <abougouffa@fedoraproject.org>
7  #
8  # This script:
9  # * interactively prompts for a user's wrapping passphrase (defaults to their
10 #   login passphrase)
11 # * checks it for validity
12 # * unwraps a users mount passphrase with their supplied wrapping passphrase
13 # * inserts the mount passphrase into the keyring
14 # * and mounts a user's encrypted private folder
15
16 PRIVATE_DIR="Private"
17 PW_ATTEMPTS=3
18 MESSAGE=`gettext "Enter your login passphrase:"`
19
20 if [ -f $HOME/.ecryptfs/wrapping-independent ]
21 then
22     # use a wrapping passphrase different from the login passphrase
23     MESSAGE=`gettext "Enter your wrapping passphrase:"`
24 fi
25
26 WRAPPED_PASSPHRASE_FILE="$HOME/.ecryptfs/wrapped-passphrase"
27 MOUNT_PASSPHRASE_SIG_FILE="$HOME/.ecryptfs/$PRIVATE_DIR.sig"
28
29 # First, silently try to perform the mount, which would succeed if the appropriate
30 # key is available in the keyring
31 if /sbin/mount.ecryptfs_private >/dev/null 2>&1
32 then
33     exit 0
34 fi
35
36 # Otherwise, interactively prompt for the user's password
37 if [ -f "$WRAPPED_PASSPHRASE_FILE" -a -f "$MOUNT_PASSPHRASE_SIG_FILE" ]
38 then
39     tries=0
40
41     while [ $tries -lt $PW_ATTEMPTS ]

```

```

42 do
43     LOGINPASS=`zenity --password --title "eCryptFS: $MESSAGE"`
44     if [ $(wc -l < "$MOUNT_PASSPHRASE_SIG_FILE") = "1" ]
45     then
46         # No filename encryption; only insert fek
47         if printf "%s\0" "$LOGINPASS" | ecryptfs-unwrap-passphrase "$WRAPPED_PASSPHRASE_FILE" - |
48         ↪ ecryptfs-add-passphrase -
49         then
50             break
51         else
52             zenity --error --title "eCryptfs" --text "Error: Your passphrase is incorrect"
53             tries=$((tries + 1))
54             continue
55         fi
56     else
57         if printf "%s\0" "$LOGINPASS" | ecryptfs-insert-wrapped-passphrase-into-keyring
58         ↪ "$WRAPPED_PASSPHRASE_FILE" -
59         then
60             break
61         else
62             zenity --error --title "eCryptfs" --text "Error: Your passphrase is incorrect"
63             tries=$((tries + 1))
64             continue
65         fi
66     fi
67 done
68
69 if [ $tries -ge $PW_ATTEMPTS ]
70 then
71     zenity --error --title "eCryptfs" --text "Too many incorrect password attempts, exiting"
72     exit 1
73 fi
74
75 /sbin/mount.ecryptfs_private
76 else
77     zenity --error --title "eCryptfs" --text "Encrypted private directory is not setup properly"
78     exit 1
79 fi
80
81 if grep -qs "$HOME/.Private $PWD ecryptfs " /proc/mounts 2>/dev/null; then
82     zenity --info --title "eCryptfs" --text "Your private directory has been mounted."
83 fi
84
85 dolphin "$HOME/Private"
86 exit 0

```

10.10.2 Desktop integration

```

1 [Desktop Entry]
2 Type=Application
3 Version=1.0
4 Name=eCryptfs Unlock Private Directory
5 Icon=unlock
6 Exec=/home/hacko/.ecryptfs/ecryptfs-mount-private-gui
7 Terminal=False

```

10.11 GDB

10.11.1 Early init

I like to disable the initial message (containing copyright info and other stuff), the right way to do this is either by starting `gdb` with `-q` option, or (since GDB v11 I think), by setting in `~/.gdbearlyinit`.

```

1  # GDB early init file
2  # Abdelhak Bougouffa (c) 2022
3
4  # Disable showing the initial message
5  set startup-quietly

```

10.11.2 Init

GDB loads `$HOME/.gdbinit` at startup, I like to define some default options in this file, this is a WIP, but it won't evolve too much, as it is recommended to keep the `.gdbinit` clean and simple. For the moment, it does just enable pretty printing, and defines the `c` and `n` commands to wrap `continue` and `next` with a post `refresh`, which is helpful with the annoying TUI when the program outputs to the stdout.

```

1  # GDB init file
2  # Abdelhak Bougouffa (c) 2022
3
4  # Save history
5  set history save on
6  set history filename ~/.gdb_history
7  set history remove-duplicates 2048
8
9  # When debugging my apps, debug information of system libraries
10 # aren't that important
11 set debuginfod enabled off
12
13 # Set pretty print
14 set print pretty on
15
16 skip pending on
17 python
18 import os
19
20 # Add libs here
21 LIB_PATHS = ["/usr/include"]
22
23 for lib_path in LIB_PATHS:
24     for root, dirs, files in os.walk(lib_path):
25         for file in files:
26             cmd = f"skip file {os.path.join(root, file)}"
27             gdb.execute(cmd, True, to_string=True)
28         end
29     skip enable
30
31 skip pending on
32 guile
33 <<gdb-init-guile>>
34 end
35 skip enable
36
37 # This fixes the annoying ncurses TUI glitches and saves typing C-l each time to refresh the screen
38 define cc
39     continue
40     refresh
41 end
42
43 define nn
44     next
45     refresh
46 end

```

10.12 GnuPG

I add this to my `~/gnupg/gpg-agent.conf`, to set the time-to-live to one day.


```

1 # Do not ask me about entered passwords for 24h (during the same session)
2 default-cache-ttl 86400
3 max-cache-ttl 86400
4
5 # As I'm using KDE, use Qt based pinentry tool instead of default GTK+
6 pinentry-program /usr/bin/pinentry-qt
7
8 # Allow pinentry in Emacs minibuffer (combined with epg-pinentry-mode)
9 allow-loopback-pinentry
10 allow-emacs-pinentry

```

10.13 OCR This

```

1 #!/bin/bash
2
3 IMG=$(mktemp -u --suffix=".png")
4 scrot -s "$IMG" -q 100
5 mogrify -modulate 100,0 -resize 400% "$IMG"
6 tesseract "$IMG" -l eng 2> /dev/null | xsel -ib

```

10.14 Packages

Here, we install Arch packages

```

1 check_and_install_pkg () {
2     PKG_NAME="$1"
3     if ! pacman -Qi $PKG_NAME &> /dev/null
4     then
5         echo "Package ${PKG_NAME} is missing, installing it using yay"
6         yay -S $PKG_NAME
7     fi
8 }
9
10 PKGS_LIST=(mpv mpc mpd vlc)
11
12 for PKG in PKGS_LIST ; do
13     check_and_install_pkg
14 done

```

10.15 KDE Plasma

On KDE, there is a good support for HiDPI displays, however, I faced annoying small icons in some contexts (for example, a right click on desktop). This can be fixed by setting `PLASMA_USE_QT_SCALING=1` before starting KDE Plasma. KDE sources the files with `.sh` extension found on `~/.config/plasma-workspace/env`, so let's create ours.

```

1 export PLASMA_USE_QT_SCALING=1

```