

Inside Design Systems

From Vision to Implementation



Design System

UI



Design System

Guidelines

Brand Identity	Accessibility	Design principles
----------------	---------------	-------------------

Style guides


Typography	Colors	Spacing
------------	--------	---------

Patterns

Layouts	Form validation	Pagination
---------	-----------------	------------

UI Components

Design	Implementation	Documentation
--------	----------------	---------------

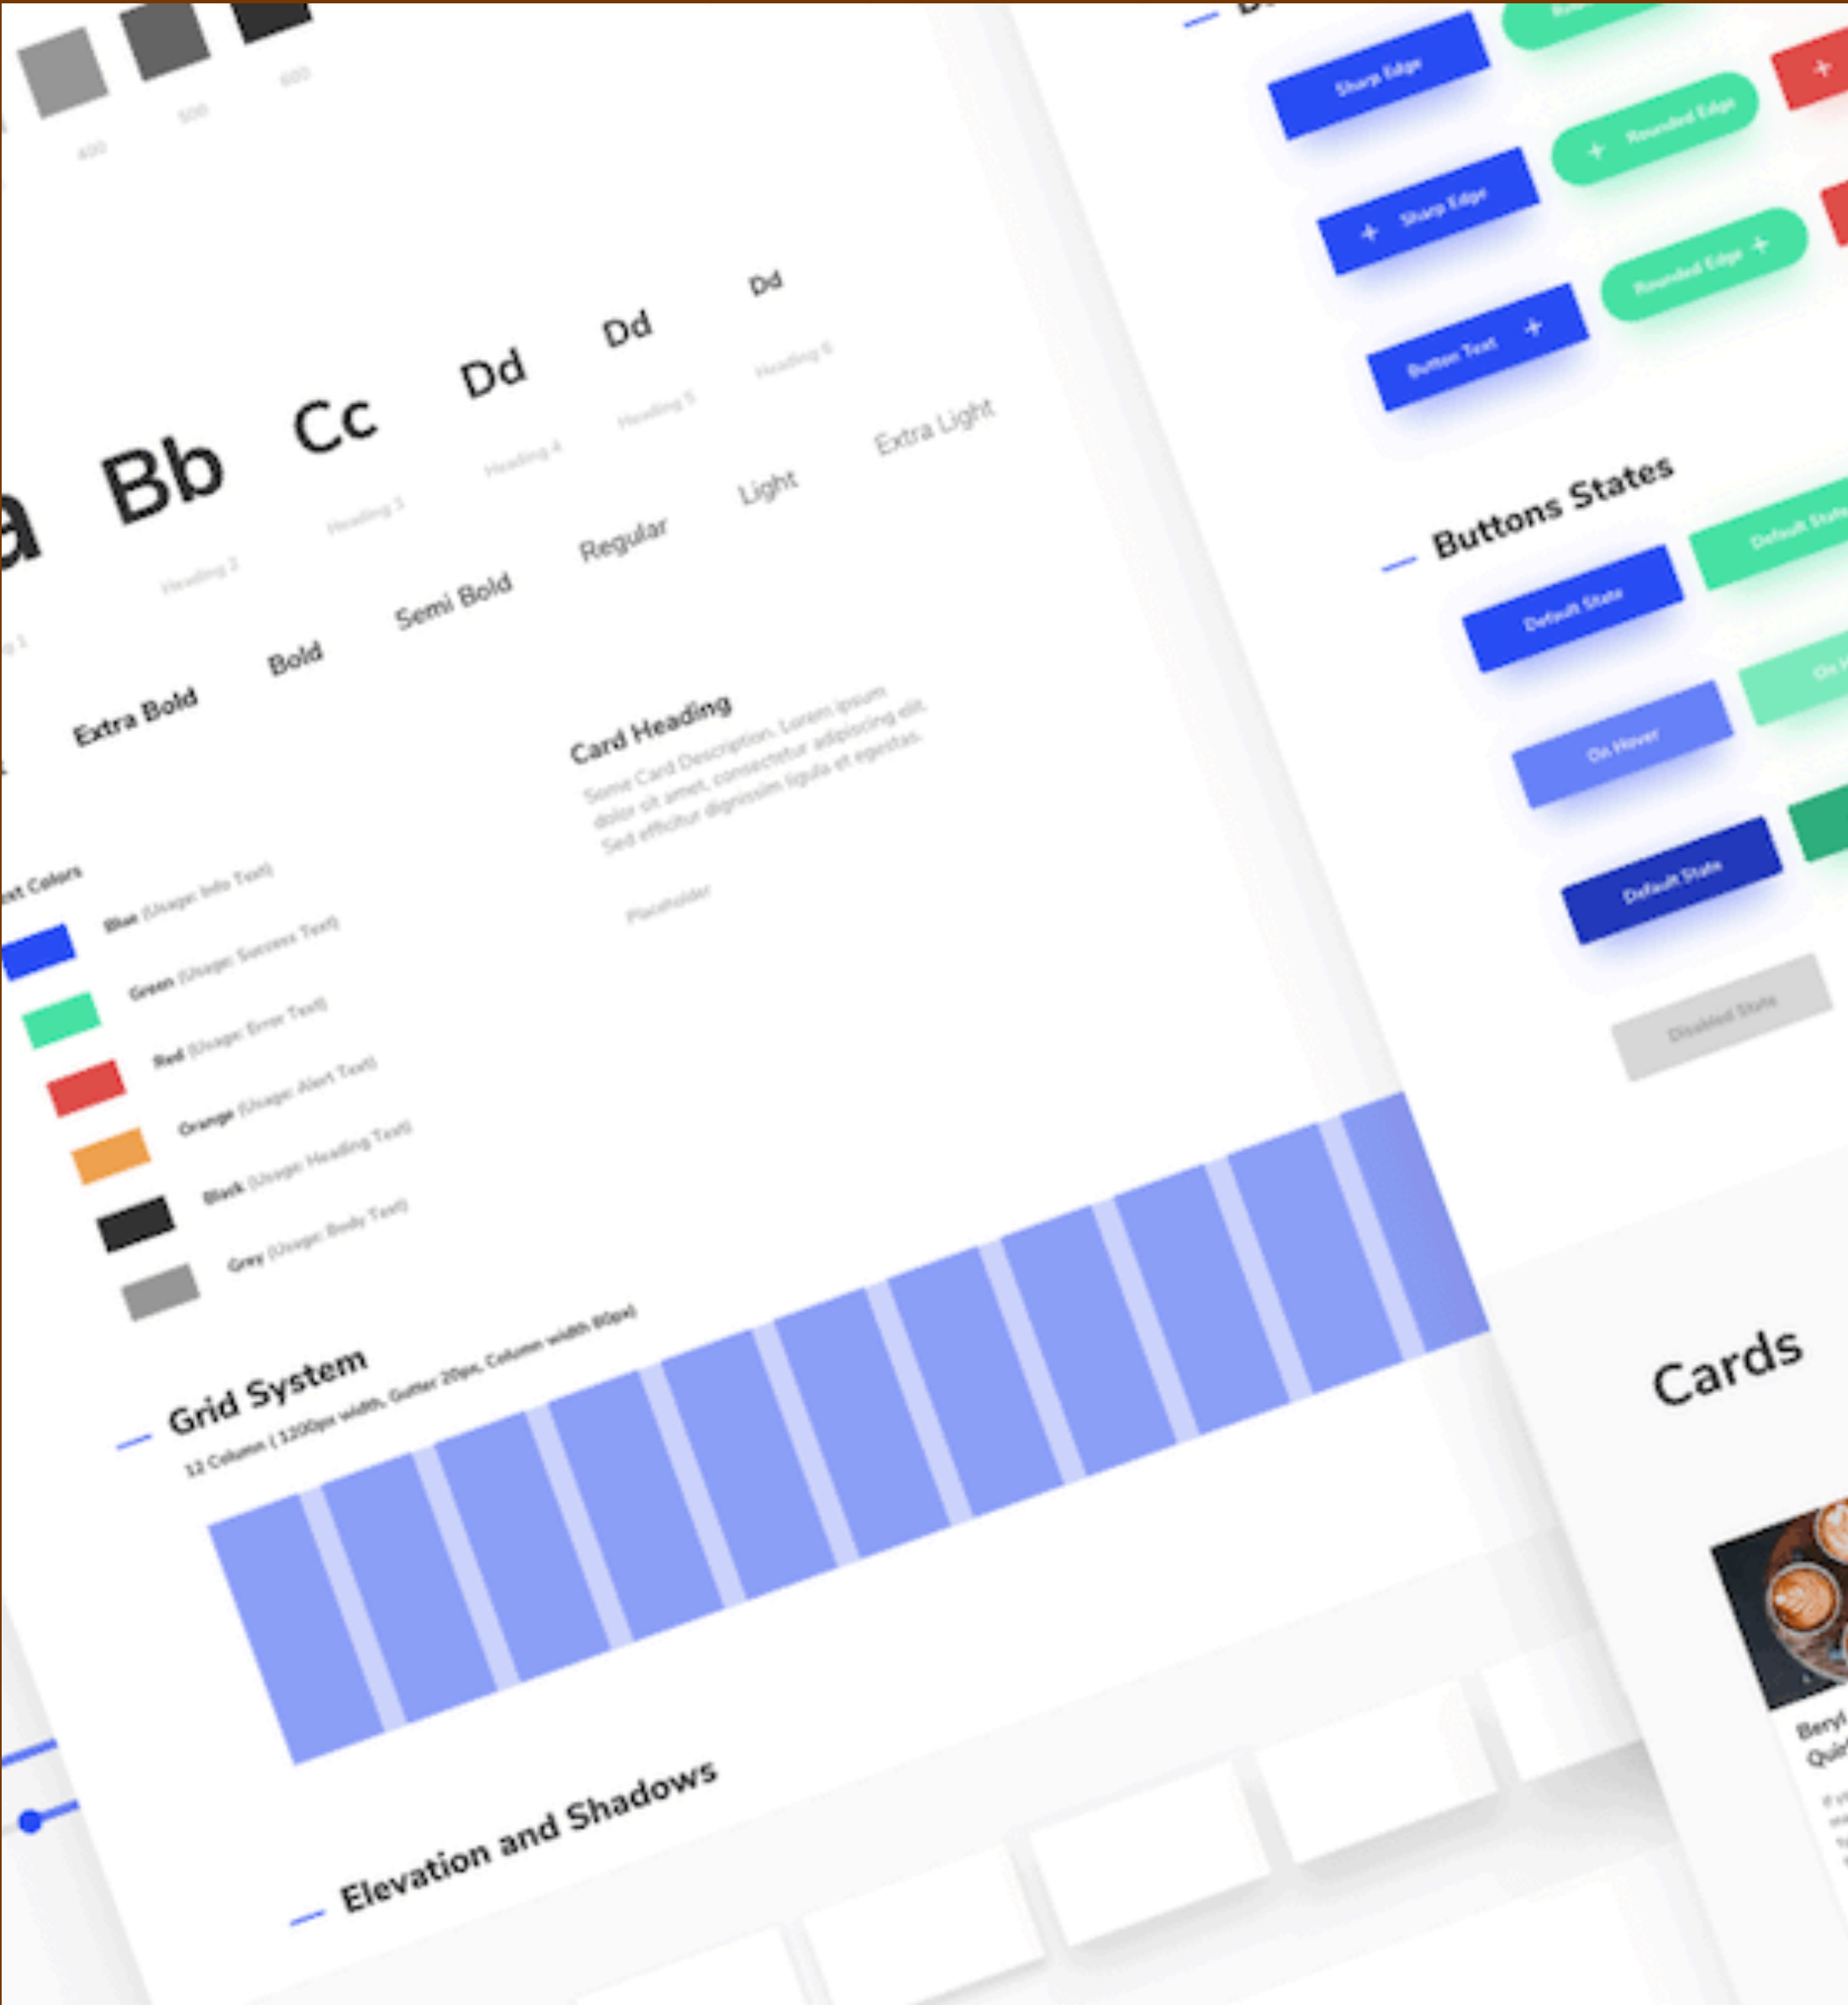

Benefits

UI
consistency

Faster
production

Higher
quality

Best
practices

Shared
vocabulary

Future-
friendly

Collaboration




Tools



Figma

Design tool


- Vector-based
 - Cloud-based
 - Real-time collaboration
-
- Version control
 - Build shared libraries

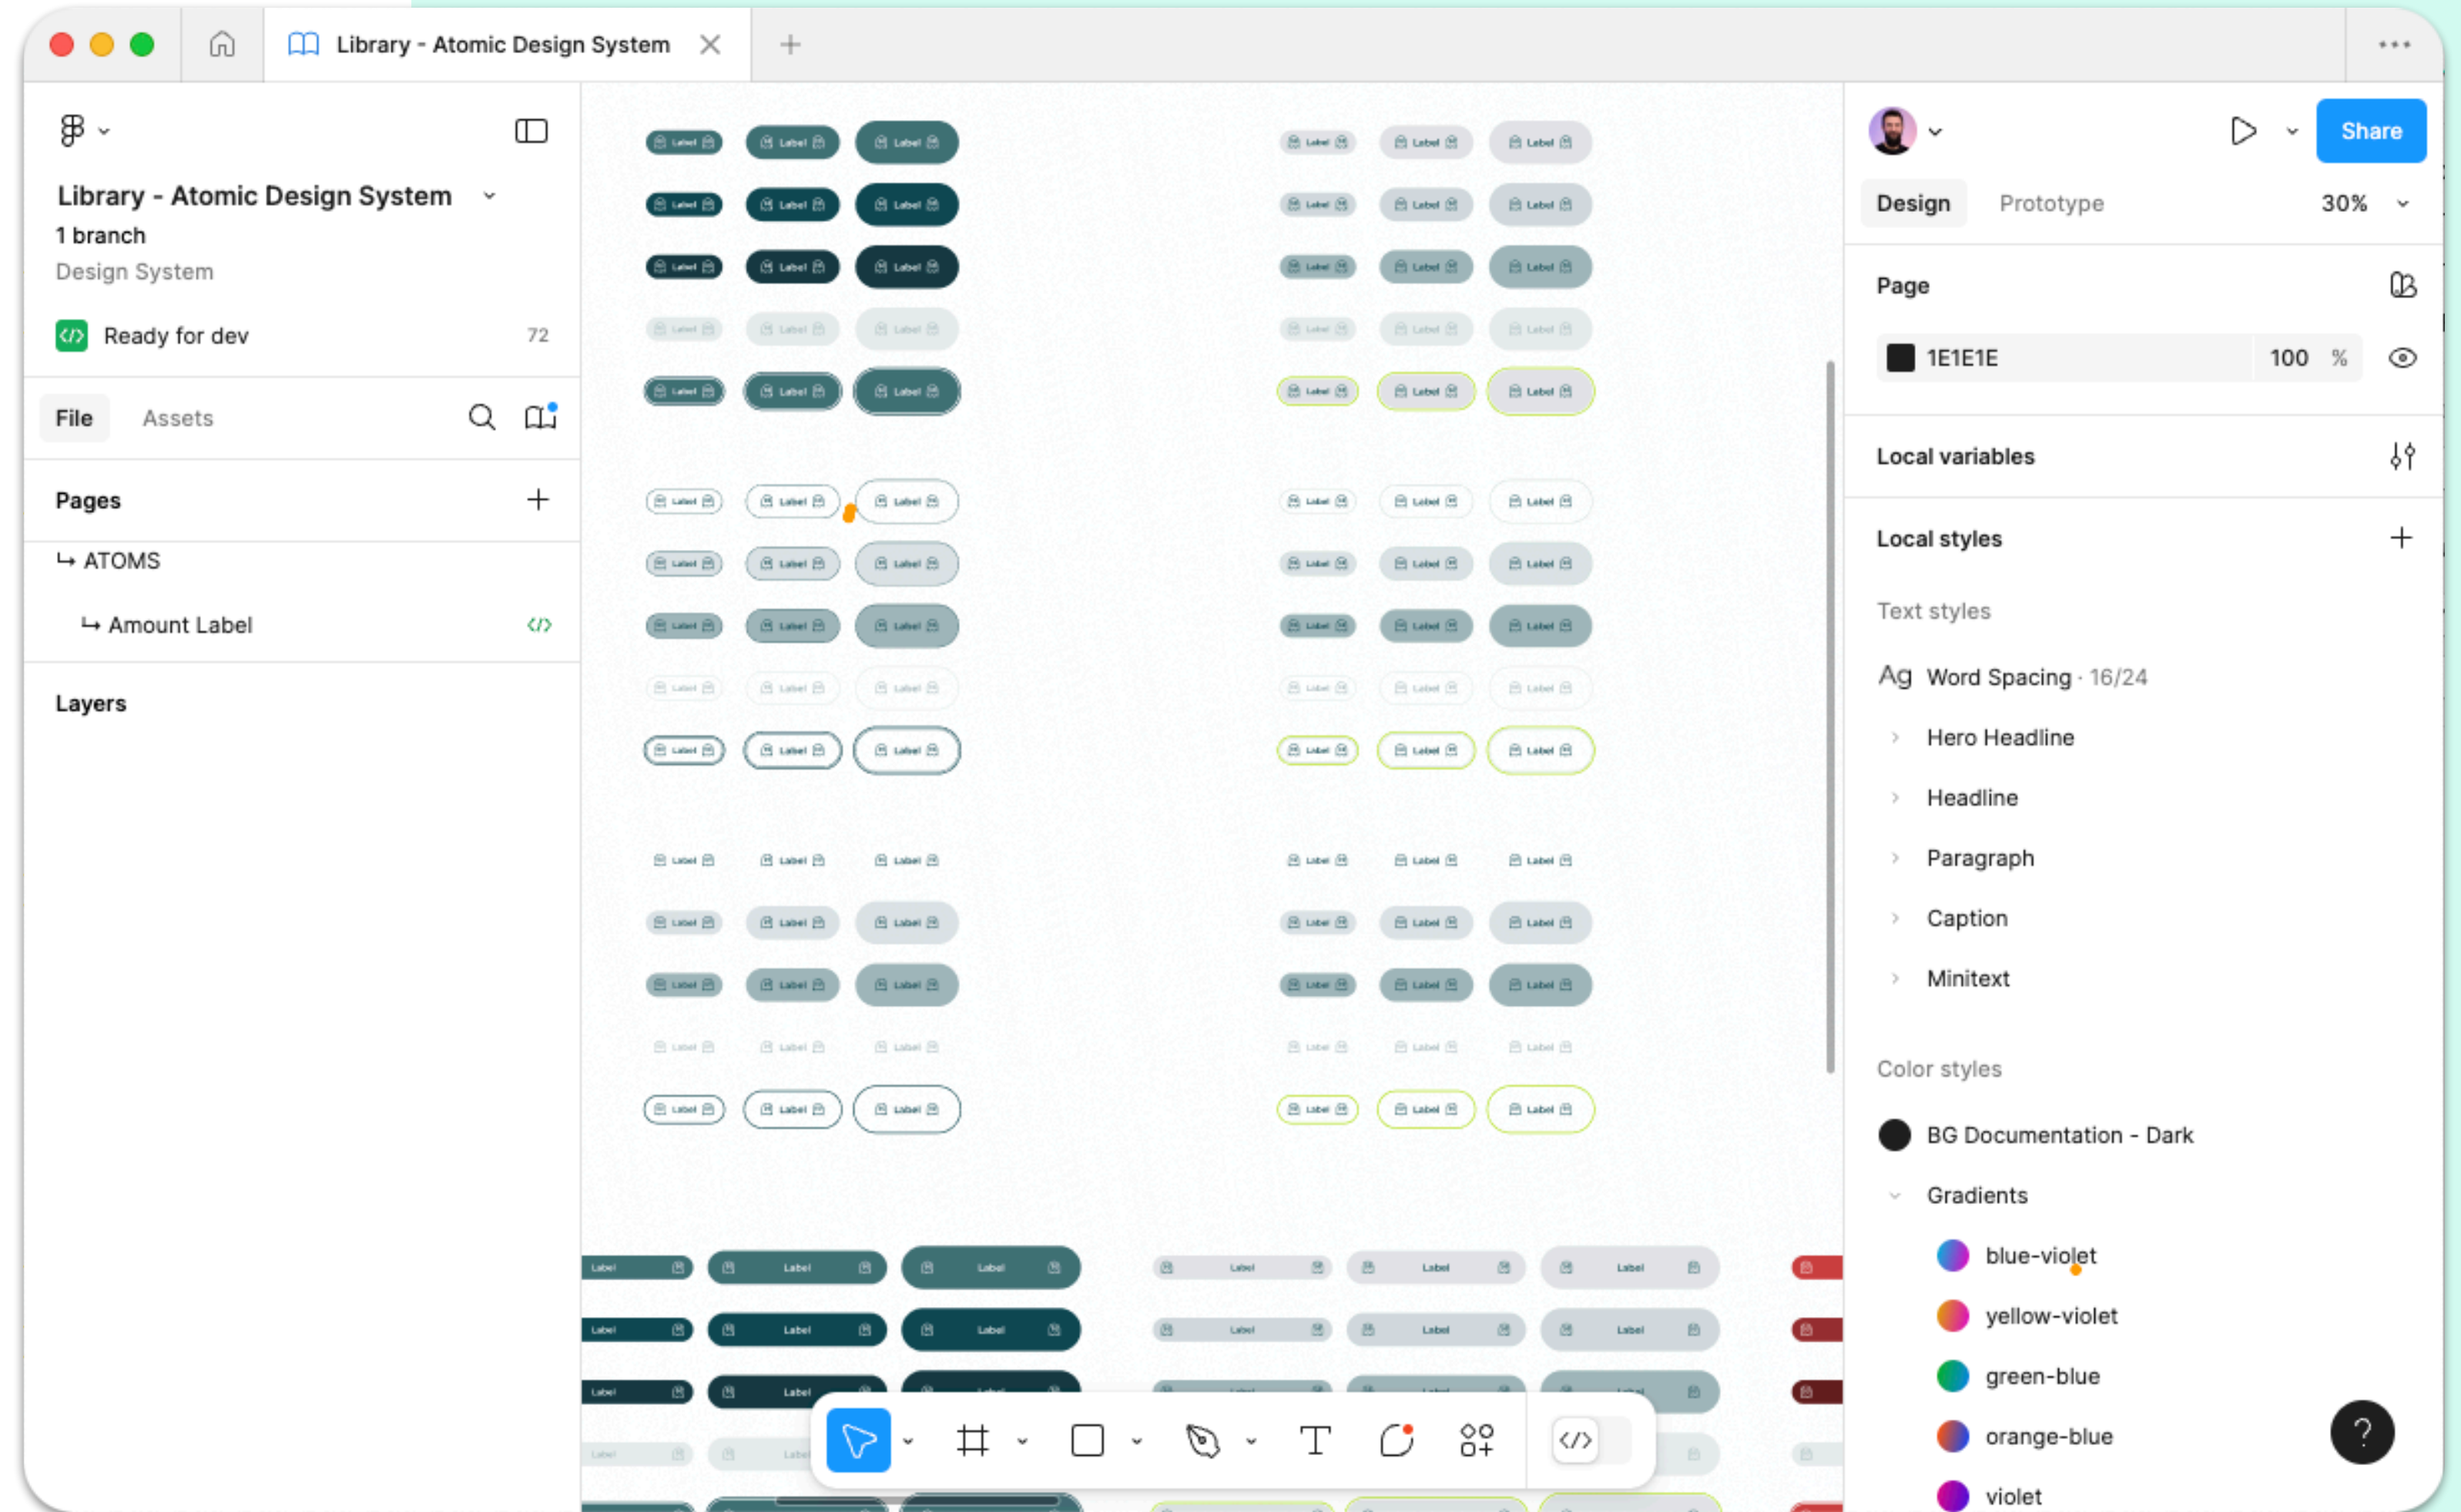

Storybook

Web UI tool

- Web-based, open source
- Component development
- Documentation
- Testing

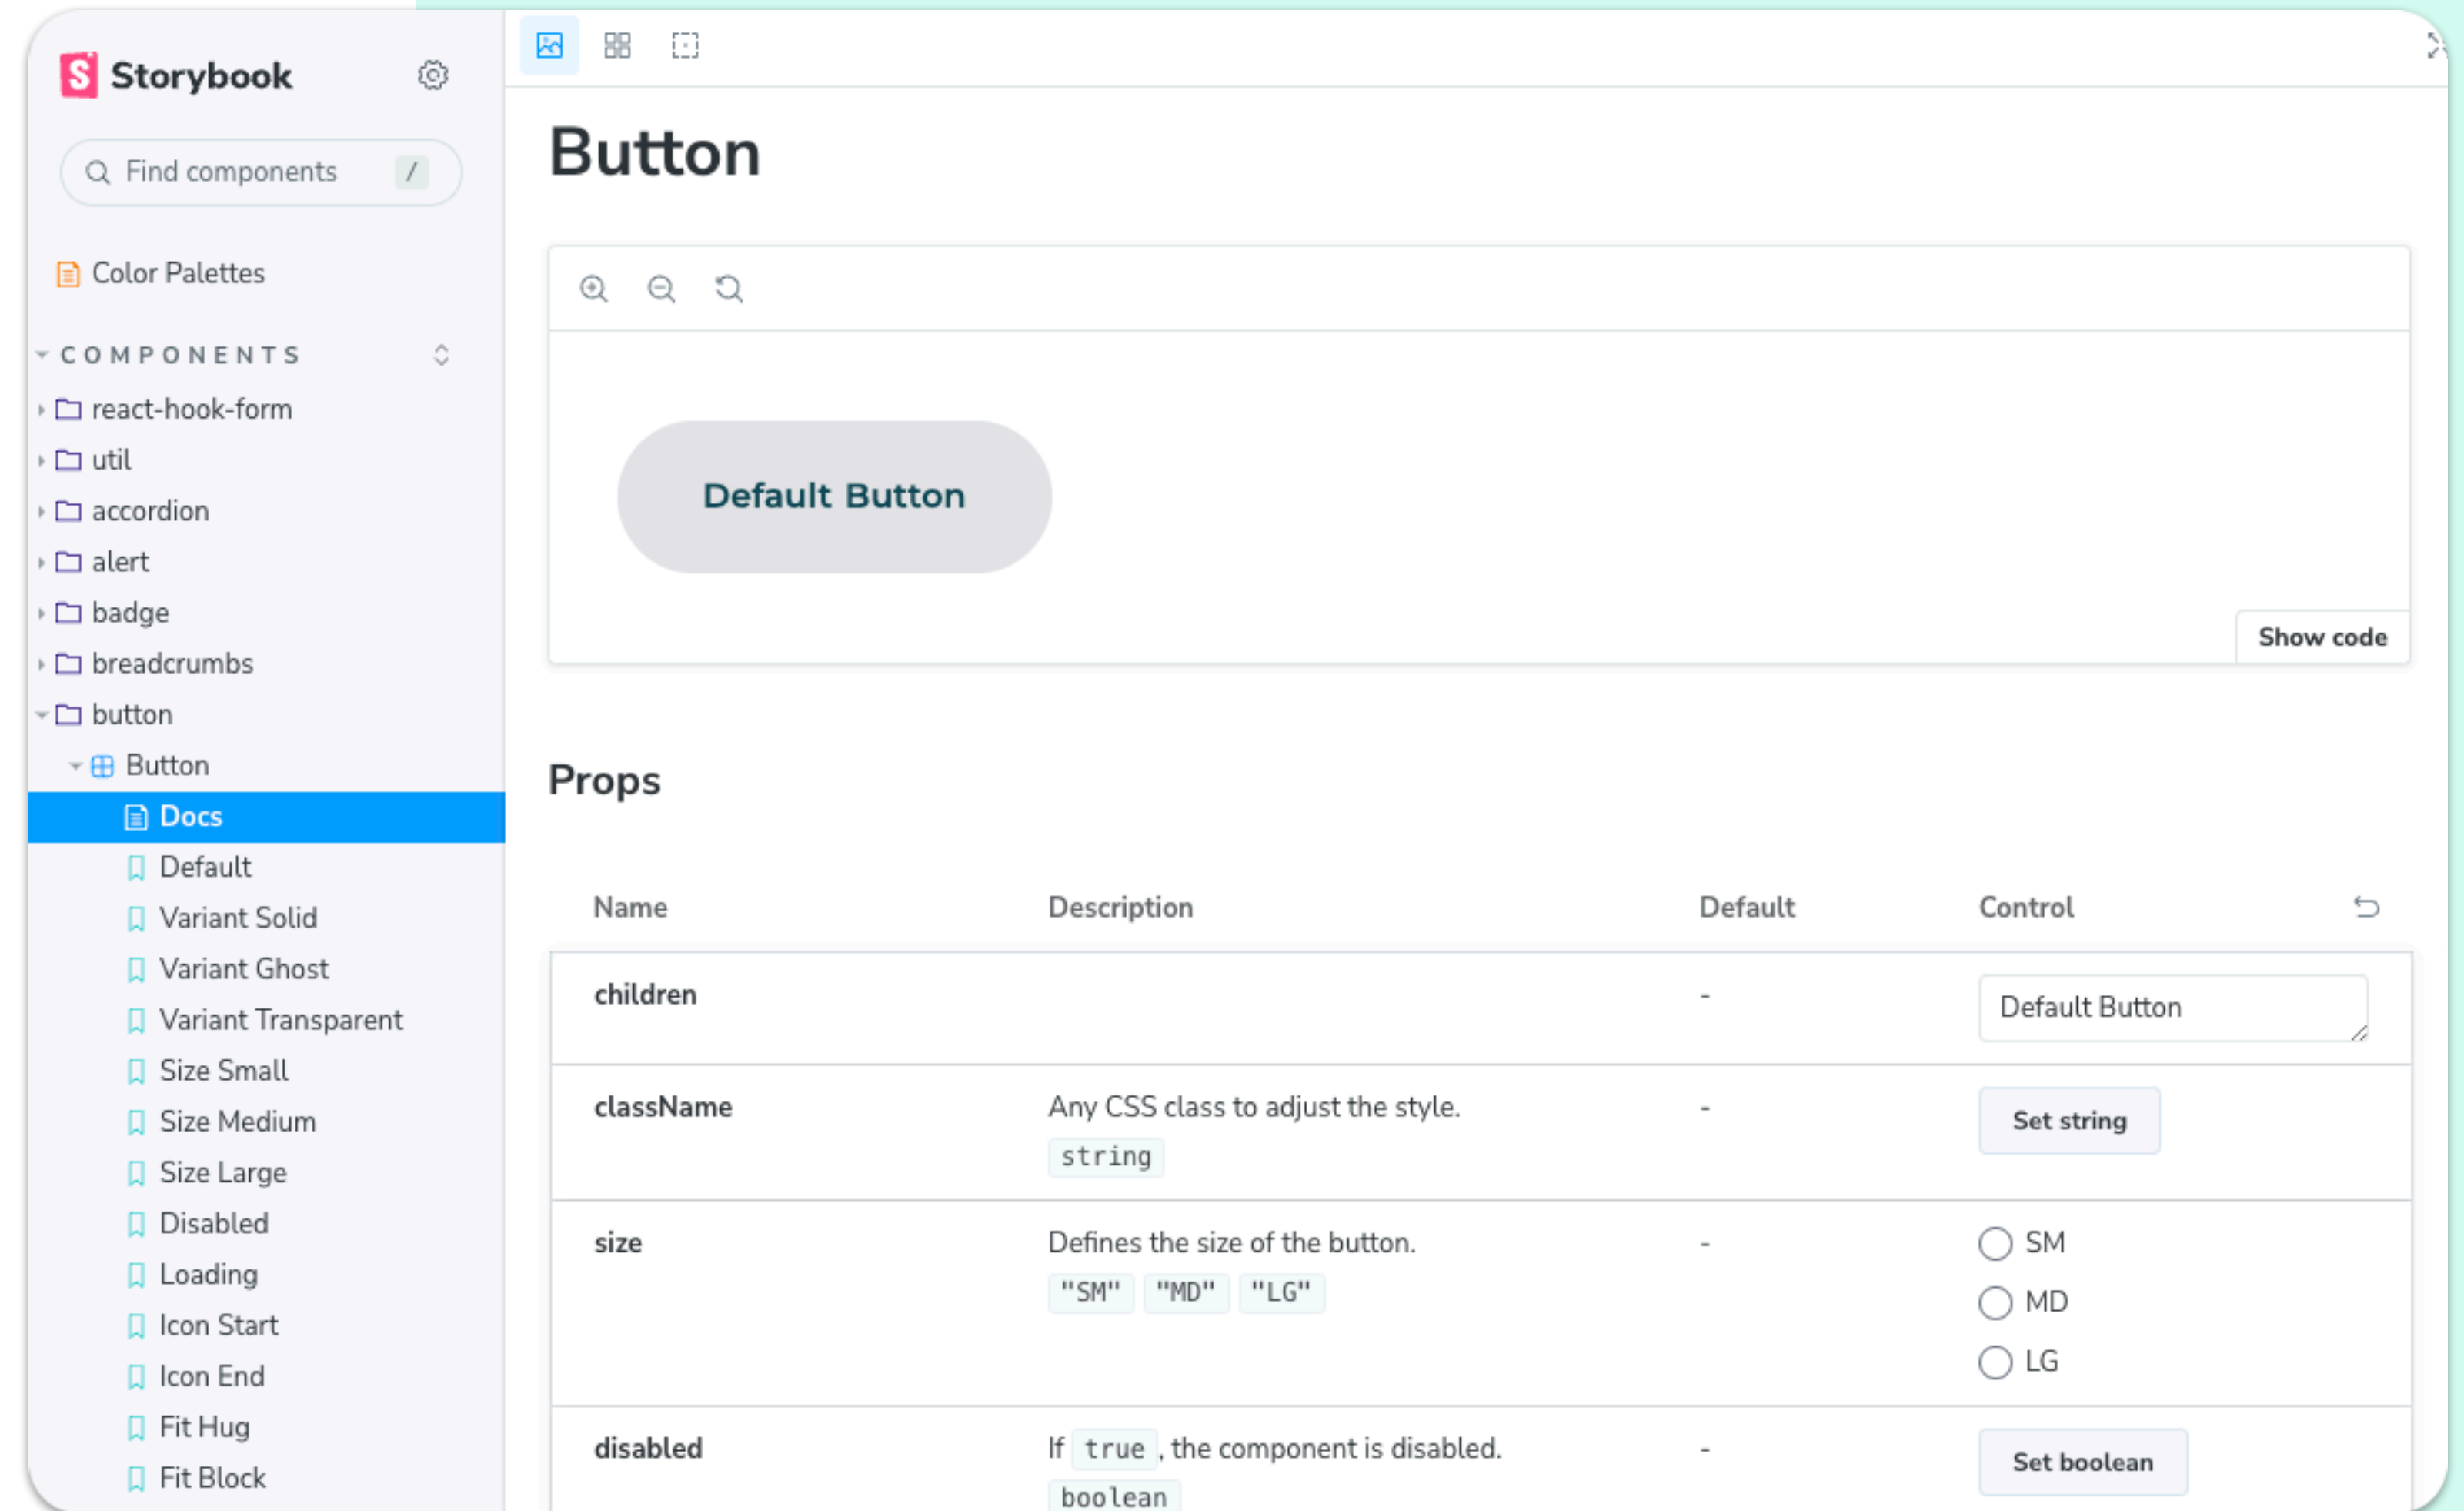

Component Library

- Foundations
- Components
- Icons
- Documentation
- Templates
- Recipes

Foundations

Colors: Basics

Neutral

Normally used for backgrounds, borders, texts and tertiary buttons and actions.

White

10

20

30

40

50

60

70

80

90

100

Background

Borders

Light fonts

Body fonts

Dark fonts

Semantic Colors

Success

For success or confirmation messages and actions.

10

20

40

60

80

100

Main

Info

To draw users attention for system messages and status with an informative intention.

10

20

40

60

80

100

Main

Warning

For critical information or warning messages.

10

20

Error

For negative or destructive messages.

10

20

Foundations

Colors: Palette

You need to choose a primary color. This is the predominant color in your interface and is used for all the primary actions.

You can also have one or multiple secondary colors that complement the primary color. Or you can choose a tertiary color.

Pink

10

20

40

60

80

100

Main

Purple

10

20

40

60

80

100

Main

Indigo

10

20

40

60

80

100

Main

Cyan

10

20

40

60

80

100

Main

Lime

10

20

40

60

80

100

Main

Orange

10

20

40

60

80

100

Main

Foundations

Fonts

	Size	Line Height	Weight
Titles			
Title 42 Bold	42px	58px	Bold
Title 32 Bold	32px	40px	Bold
Title 24 Bold	24px	36px	Bold
Title 24 Medium	24px	36px	Medium
Subtitles			
Subtitle 20 Bold	20px	30px	Bold
Subtitle 20 Medium	20px	30px	Medium
Subtitle 18 Bold	18px	28px	Bold
Subtitle 18 Semi Bold	18px	28px	Semibold
Subtitle 18 Medium	18px	28px	Medium
Subtitle 18 Regular	18px	28px	Regular
Body			
Body 16 Semi Bold	16px	24px	Semi Bold
Body 16 Semi Bold Underline	16px	24px	Semi Bold
Body 16 Regular	16px	24px	Regular
Body 16 Regular Underline	16px	24px	Regular
Body 14 Semi Bold	14px	22px	Semi Bold
Body 14 Semi Bold Underline	14px	22px	Semi Bold
Body 14 Regular	14px	22px	Regular
Body 14 Regular Underline	14px	22px	Regular
Captions			
Caption 12 Semi Bold	12px	18px	Semi Bold
Caption 12 Semi Bold Underline	12px	18px	Semi Bold
Caption 12 Regular	12px	18px	Regular

 9 | Tech Talks


Component Organization

Components

Primitive
Components

Convenience
Components

Primitive Components

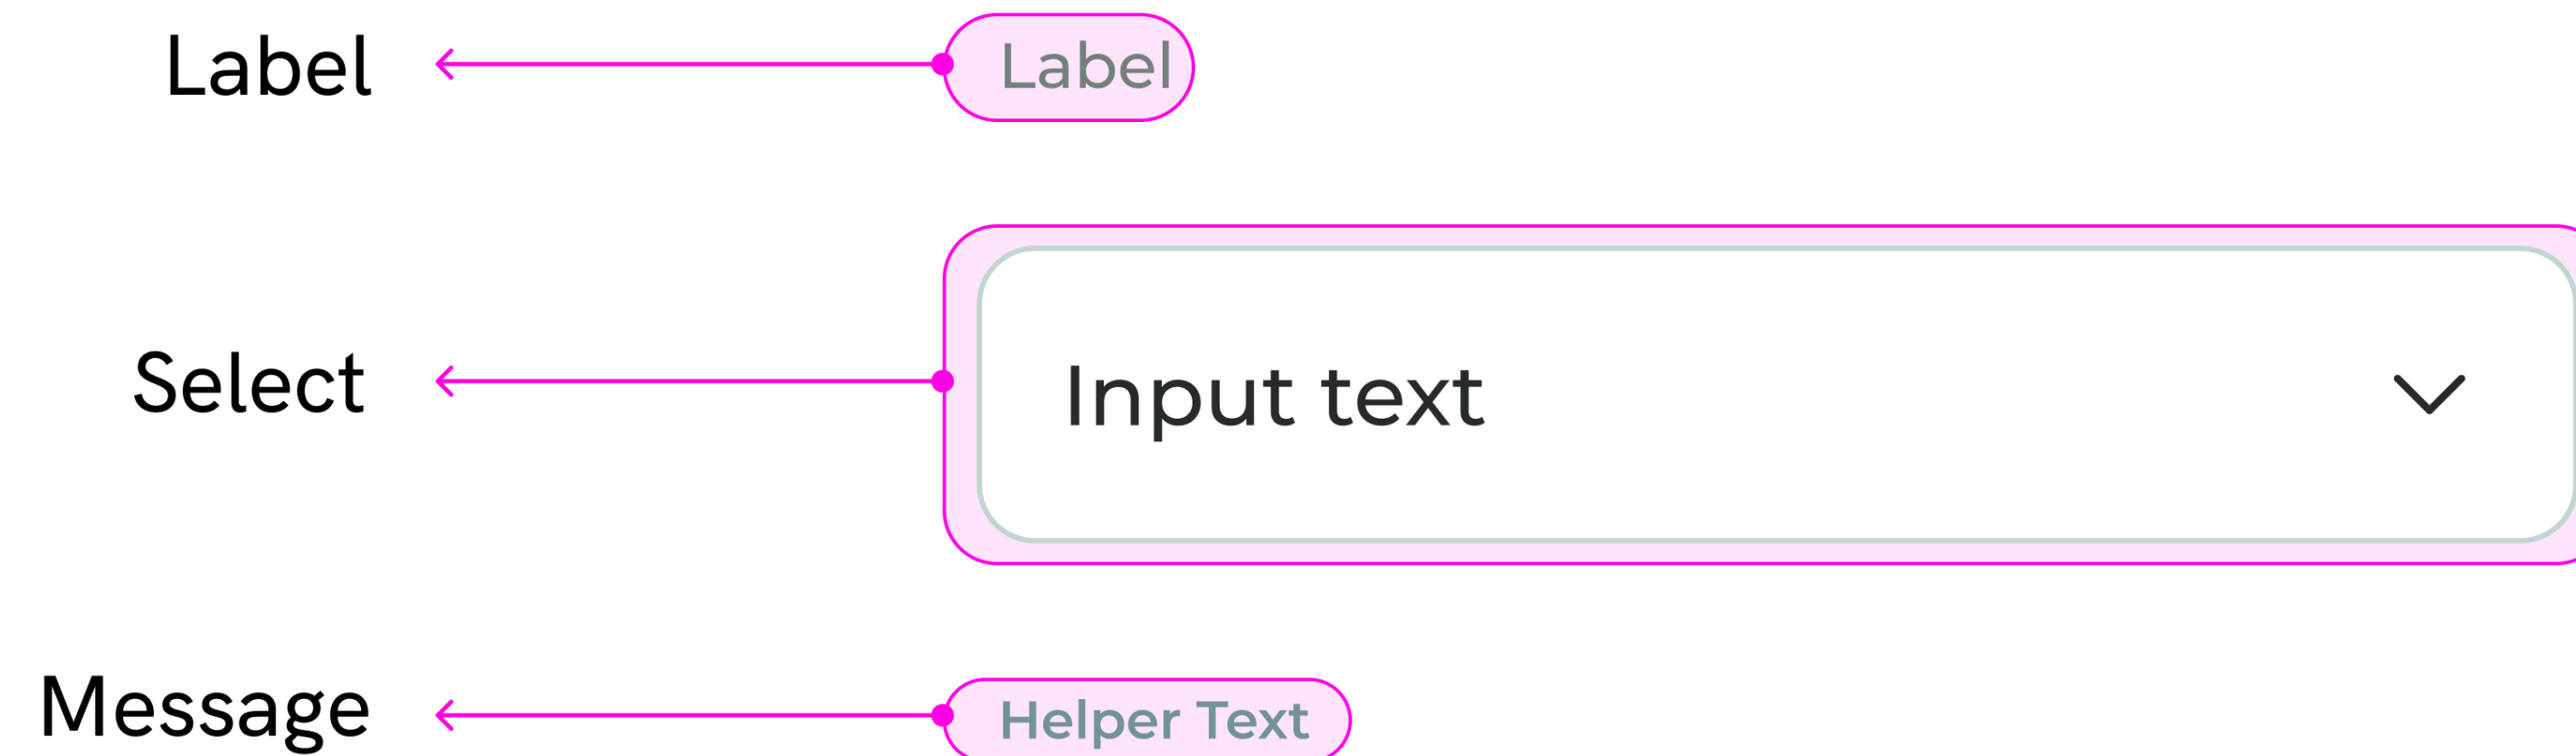

Field Components

SelectField




Label

Input text

▼


Helper Text

FormField Components

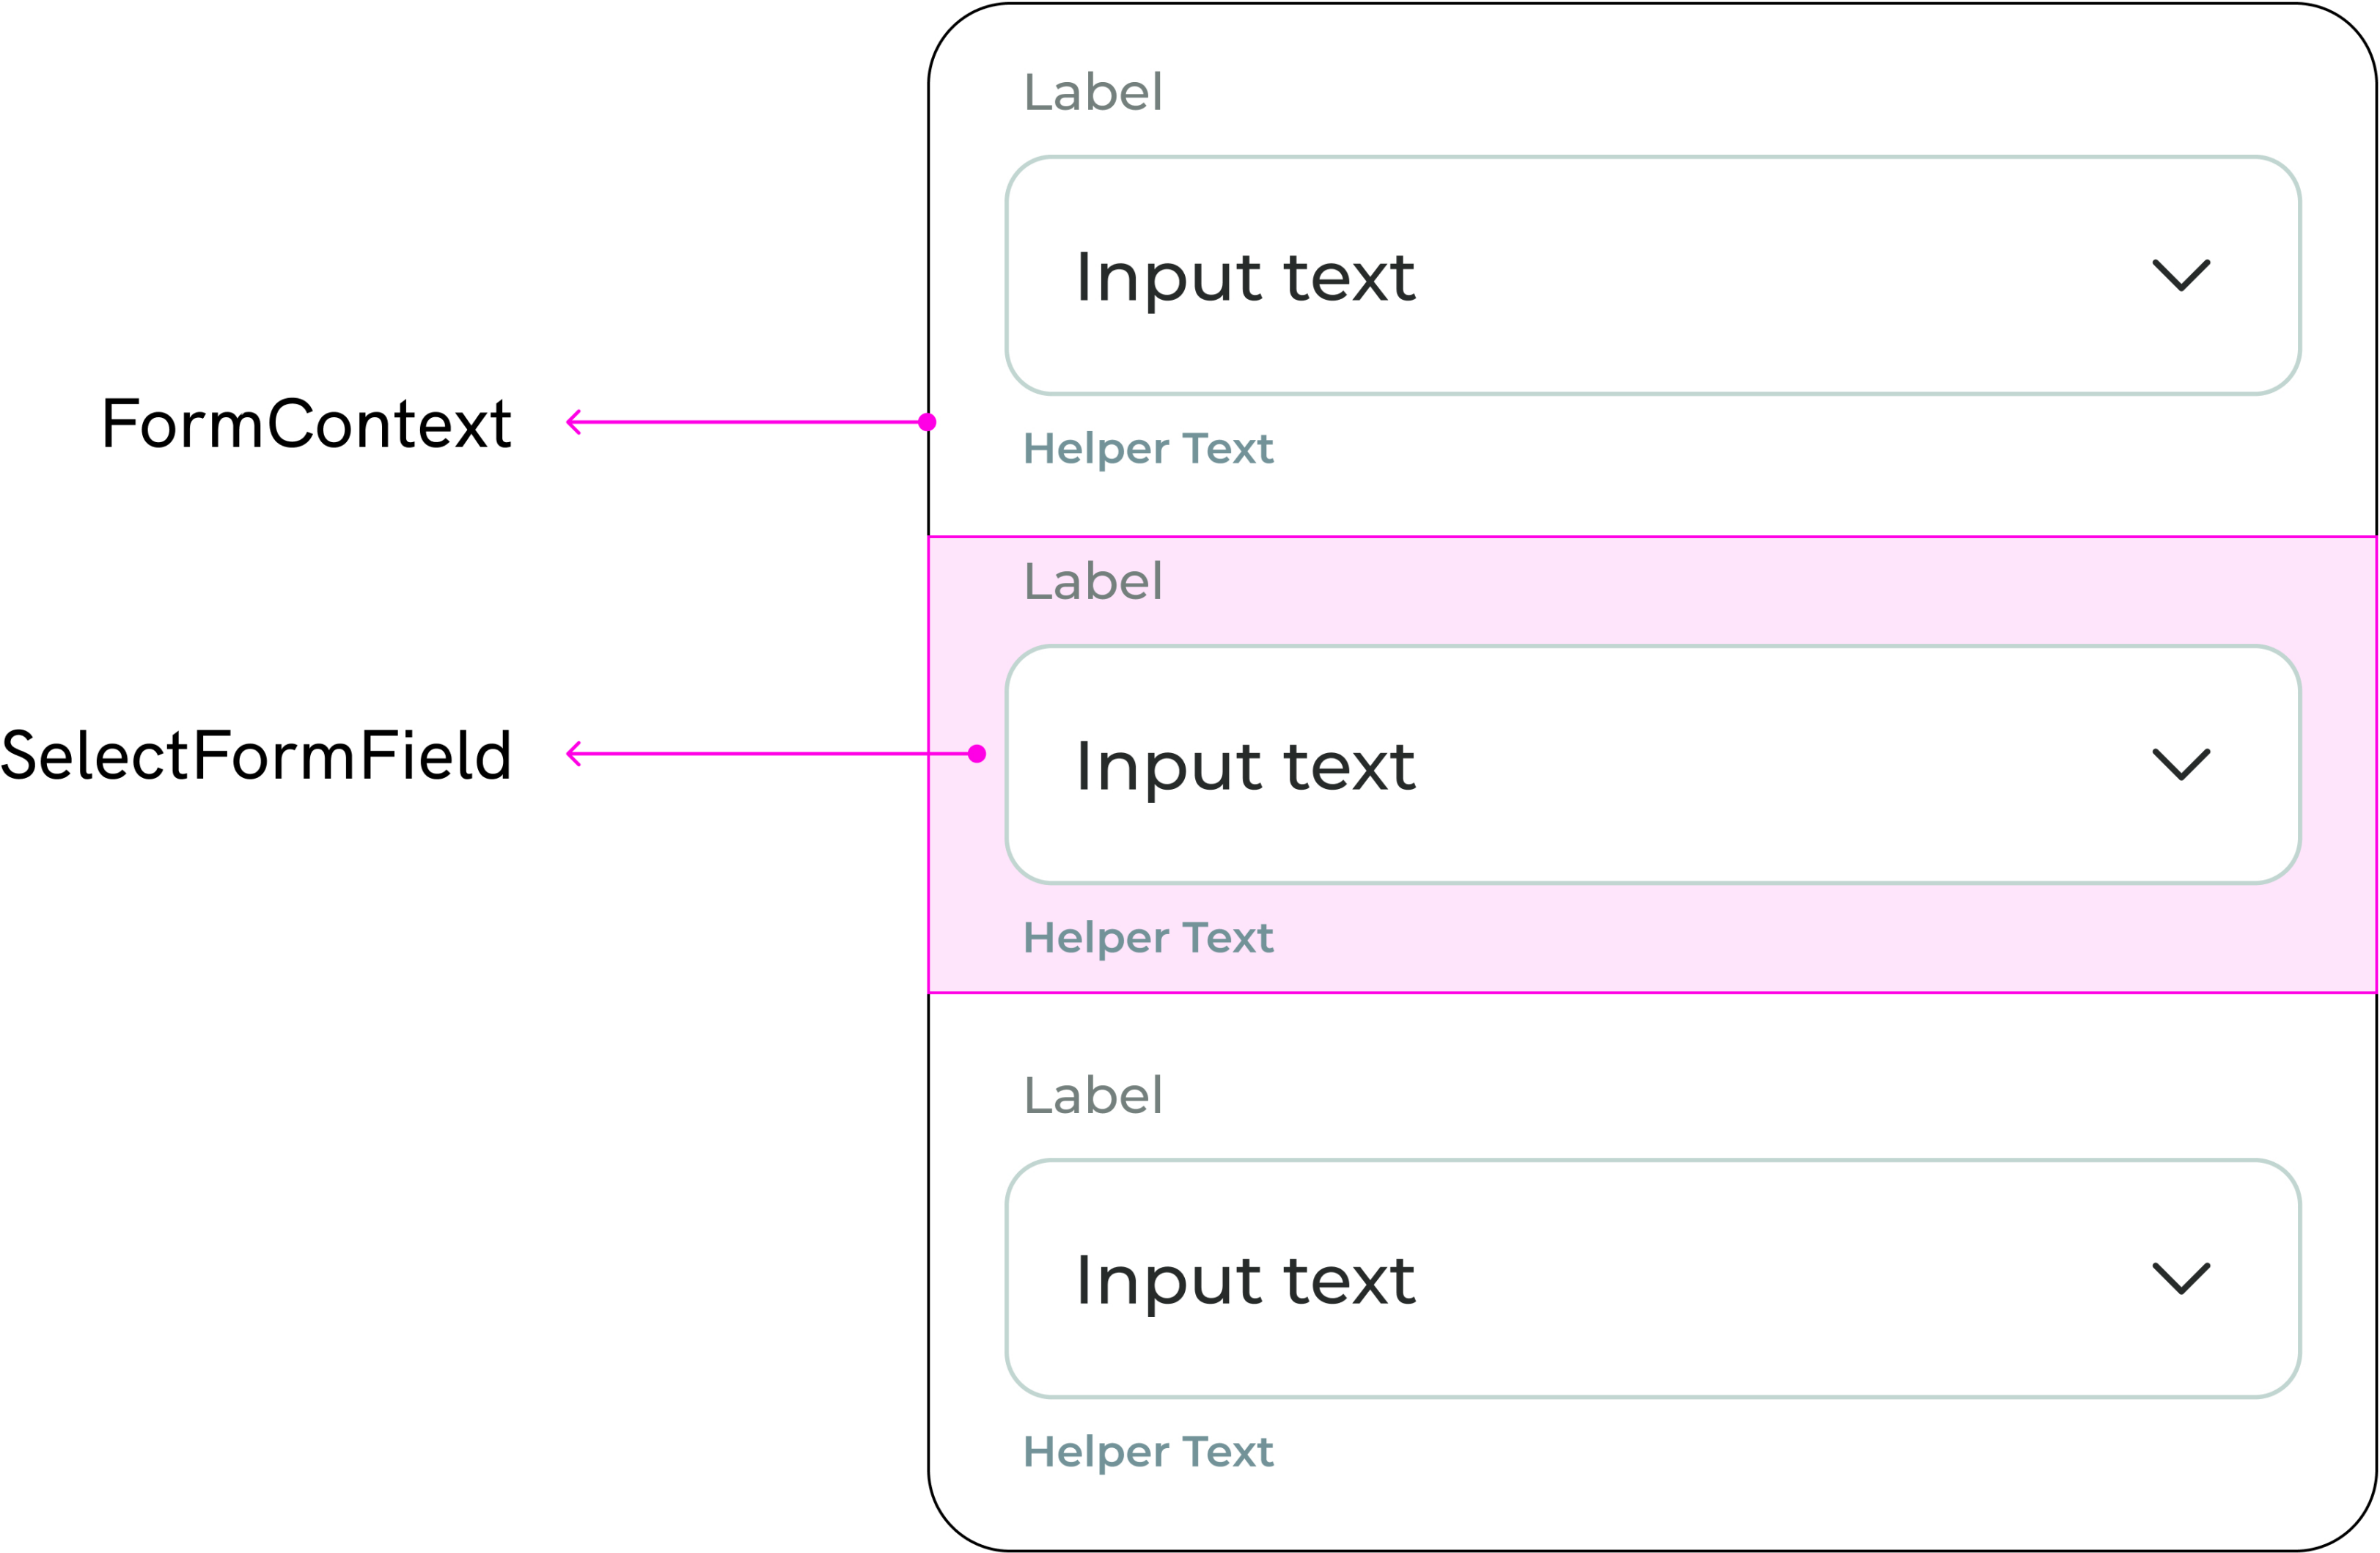


Convenience Components

Alert

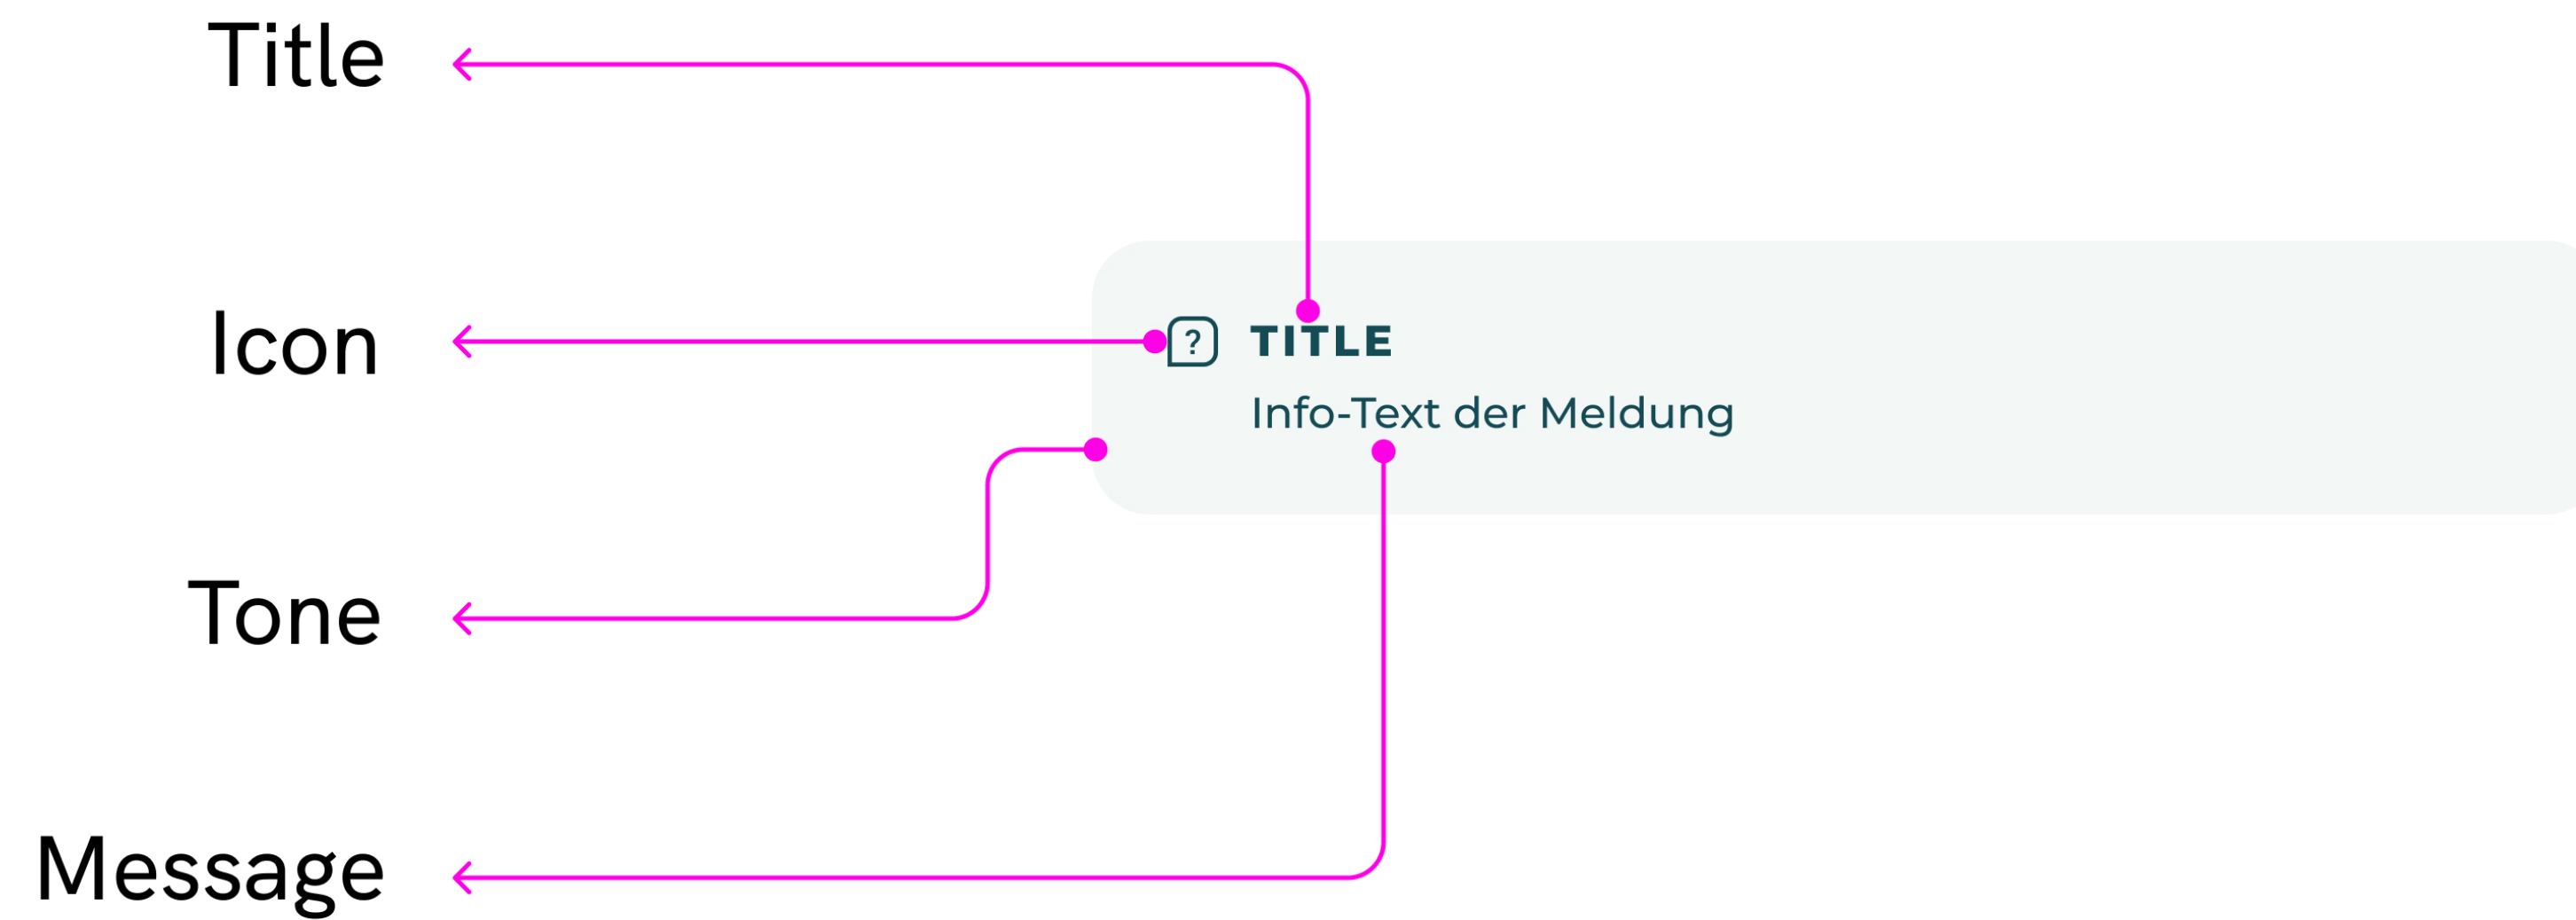


Convenience Components

AlertInfo

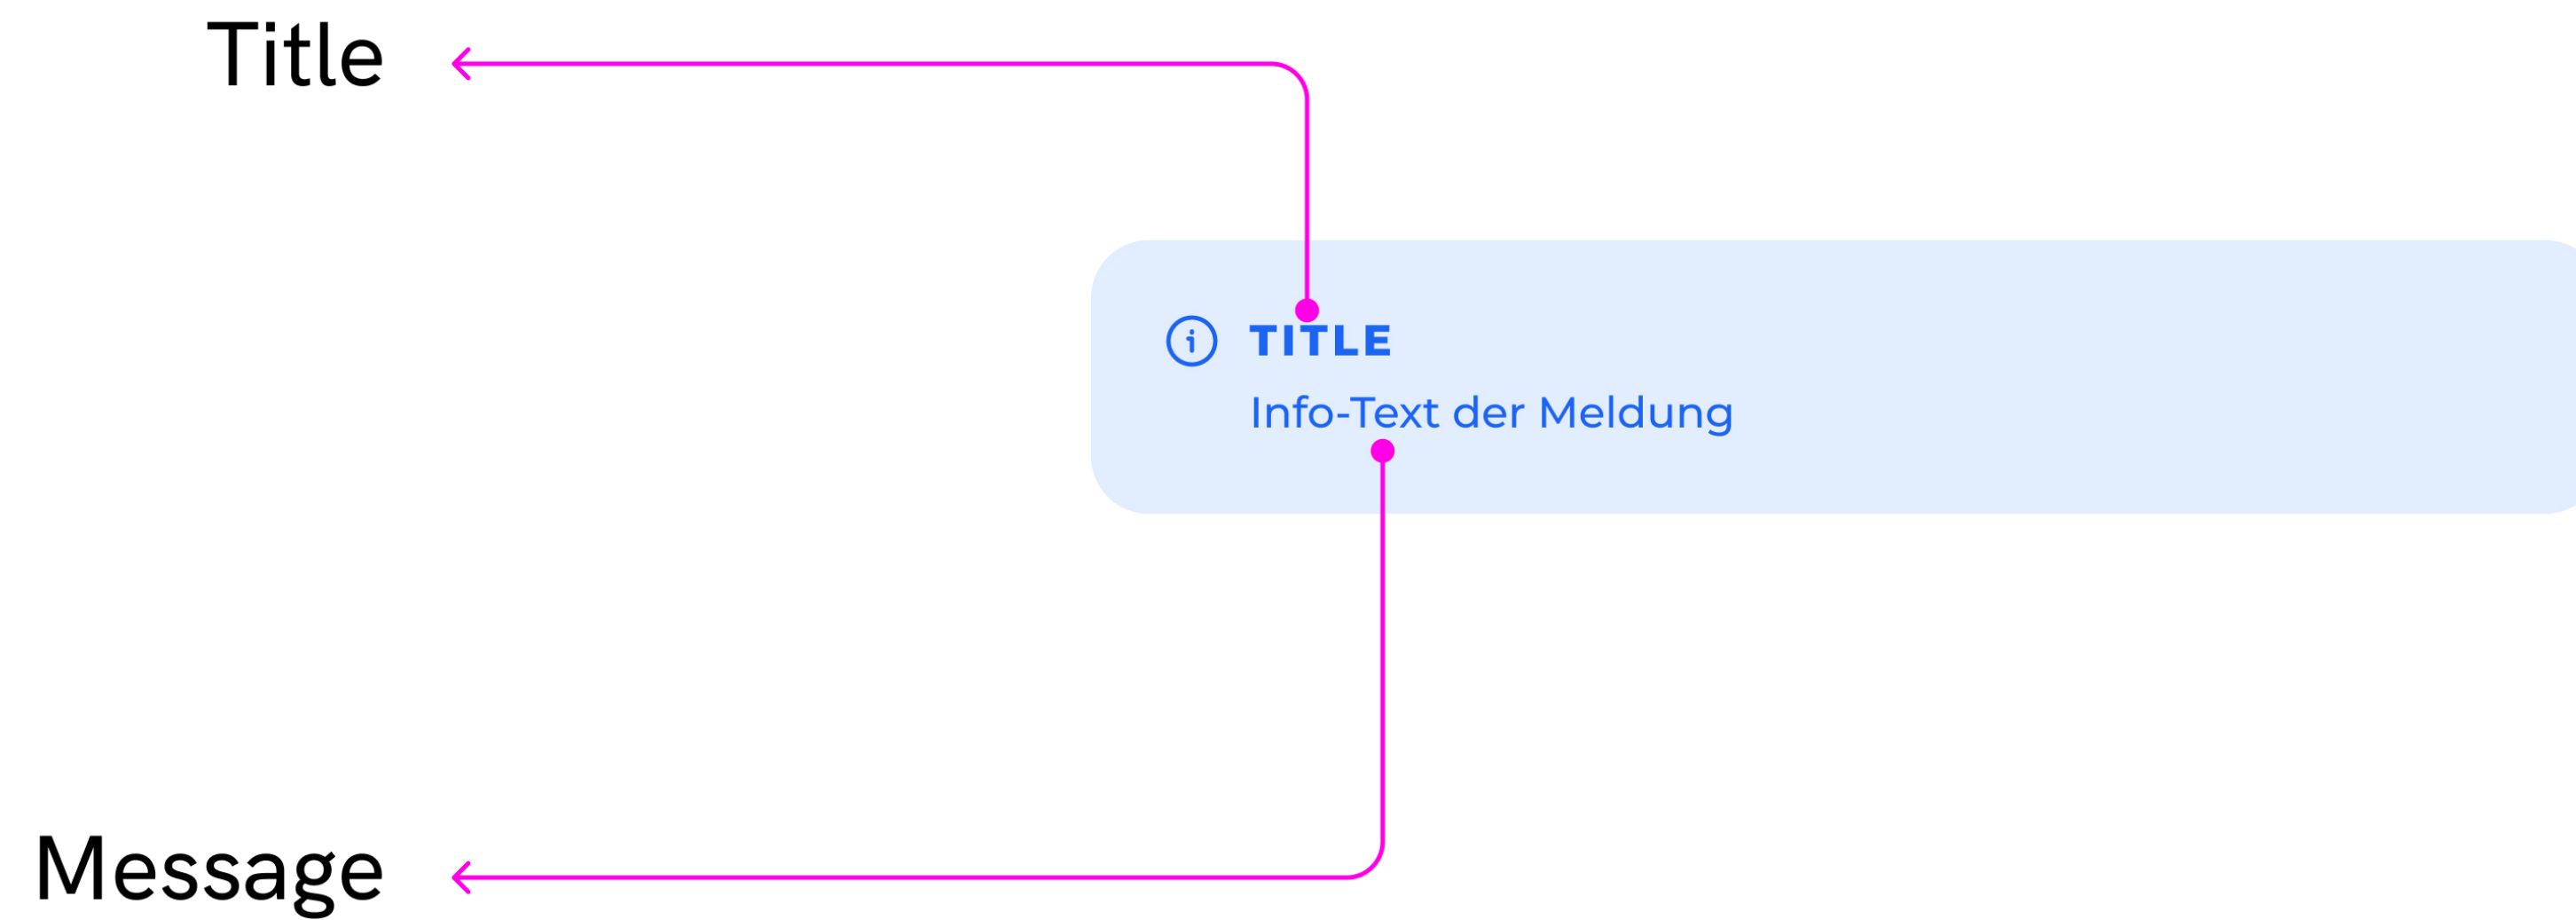

Convenience Components

AlertWarning

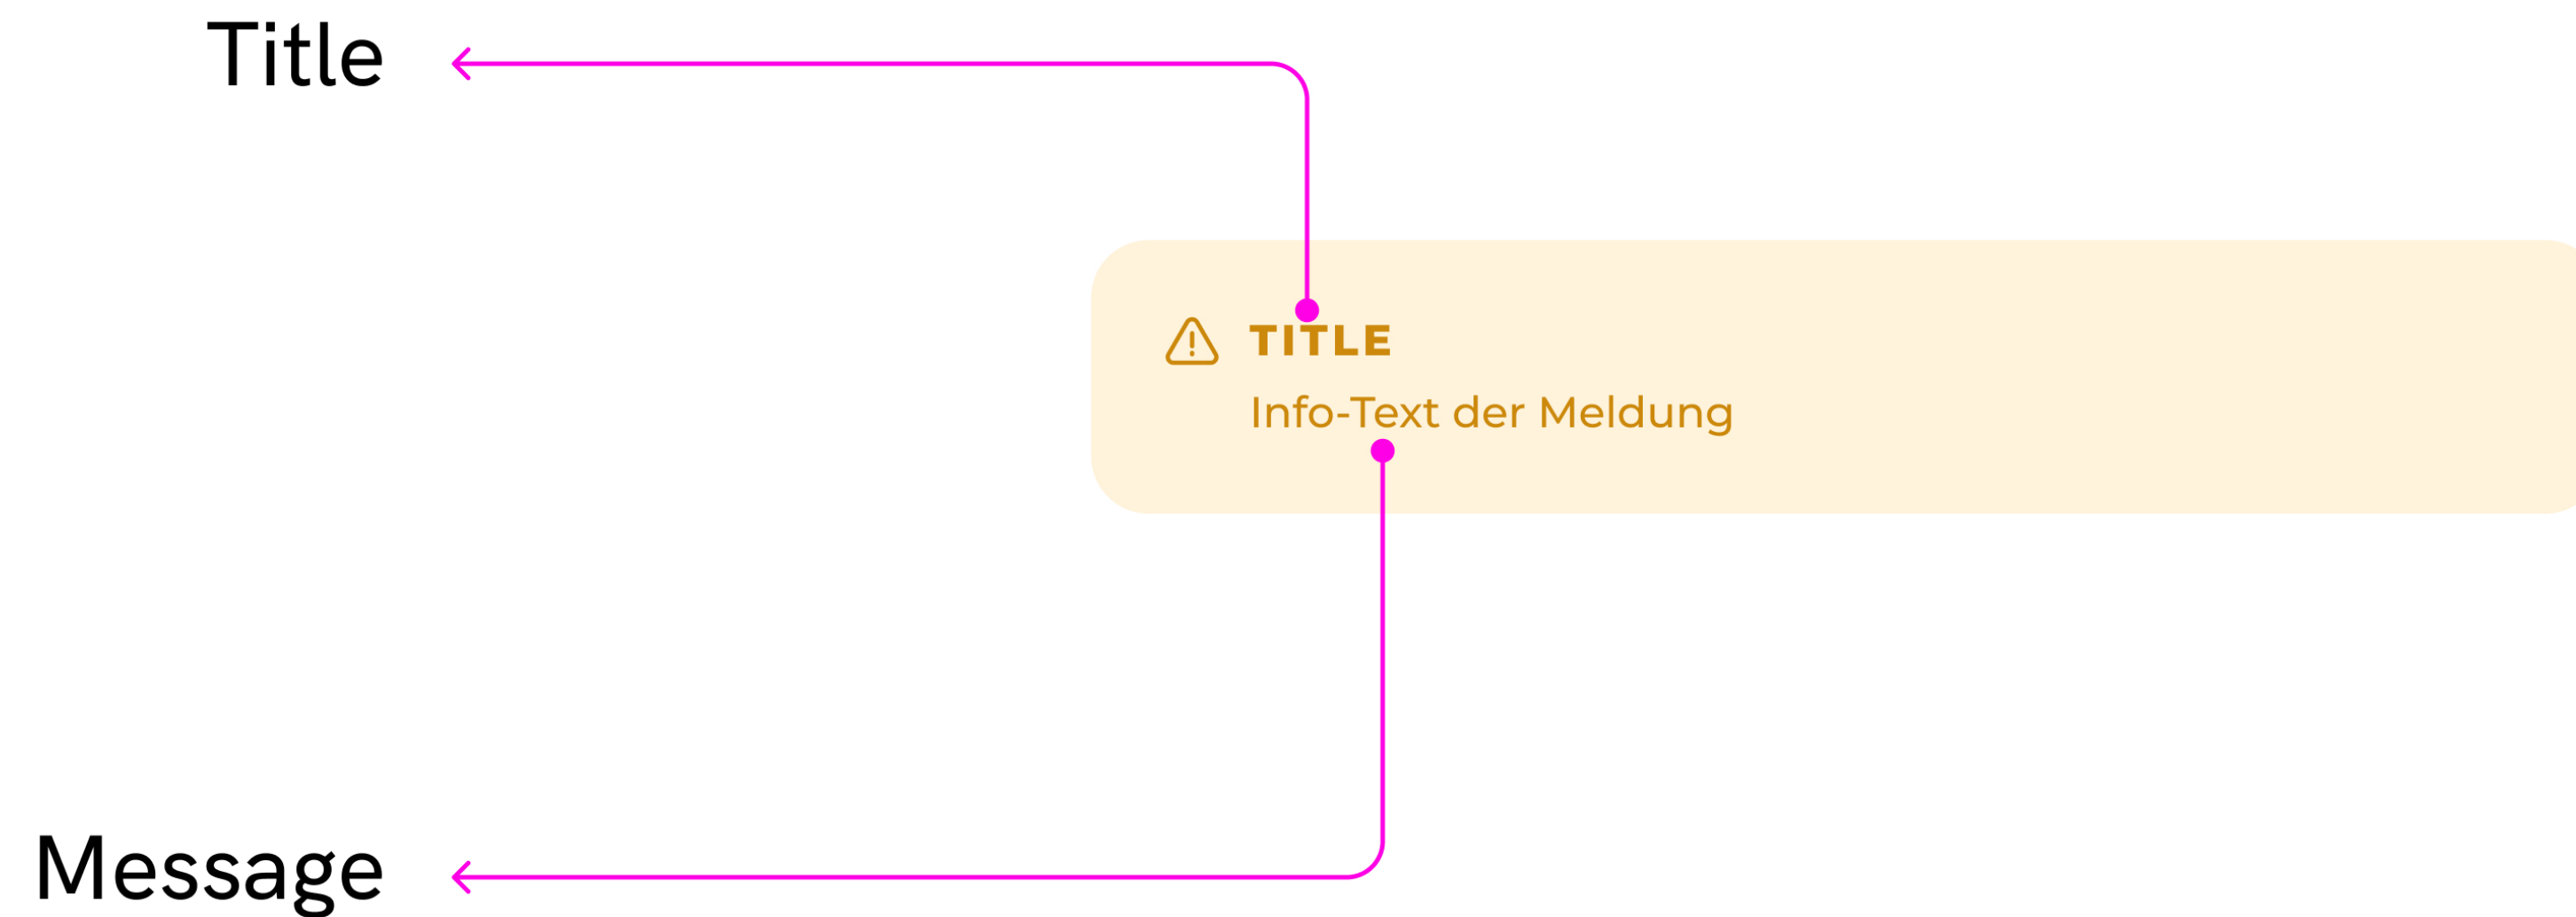

Loading Components

This is a display text

Label 

Input text



 Helper Text



Label



Design Systems

Off The Shelf

Pros

- Ready-to-use components
- Battle-tested
- Well-documented
- Maintained
- Community

Cons

- Design may not match
- Hard to adapt to own needs and style
- No control over direction
- Covers a lot you don't need
- Uncertainty about maintenance

Design Systems

From Scratch

- Full control over styling
- Full control over functionality
- Only required features
- Opinionated components

Using Headless libraries

- Unstyled components
- Functionality without styles
- More flexibility
- Only use what you need
- Wrap to provide own API

Examples

Headless UI, React Aria, Floating UI, Tanstack

From Design To Implementation



Button Design

Figma

- Base
- States
- Sizes
- Tones
- Variants

Button

Implementation

Storybook

- Web implementation
- Documentation
- Examples

Button

Default Button

Show code

Props

Name	Description	Default	Control
children		-	Default Button
className	Any CSS class to adjust the style. string	-	Set string
size	Defines the size of the button. "SM" "MD" "LG"	-	☐ SM ☐ MD ☐ LG
disabled	If <code>true</code> , the component is disabled. boolean	-	Set boolean
tone	Defines the tone of the button. "PRIMARY" "SECONDARY" "NEUTRAL" "SUCCESS" "WARNING" "CRITICAL" "INFO" "NEGATIVE"	-	Choose option...
variant	Defines the variant of the button. "SOLID" "GHOST" "TRANSPARENT"	-	☐ SOLID ☐ GHOST ☐ TRANSPARENT

Button Usage

Logout Button

◇ Component instance

📖 Library - Atomic Design System

🕒 Created 3 months ago

● Compare changes

▼

00

Label

00

Type	◆ Solid (default)
Tone	◆ Primary
Size	◆ small
State	◆ Default
Block	👁 False
Ico-left	👁 False
Label	T Speichern & Beenden
Ico-right	👁 False



```
<Button
  variant={ButtonVariant.Solid}
  tone={ButtonTone.Primary}
  size={ButtonSize.Sm}
>
  Speichern & Beenden
</Button>
```

Build Better User Interfaces Using Design Systems

