

Simulation Plan

Oren Ram
Ziv Abraham

August 2, 2026

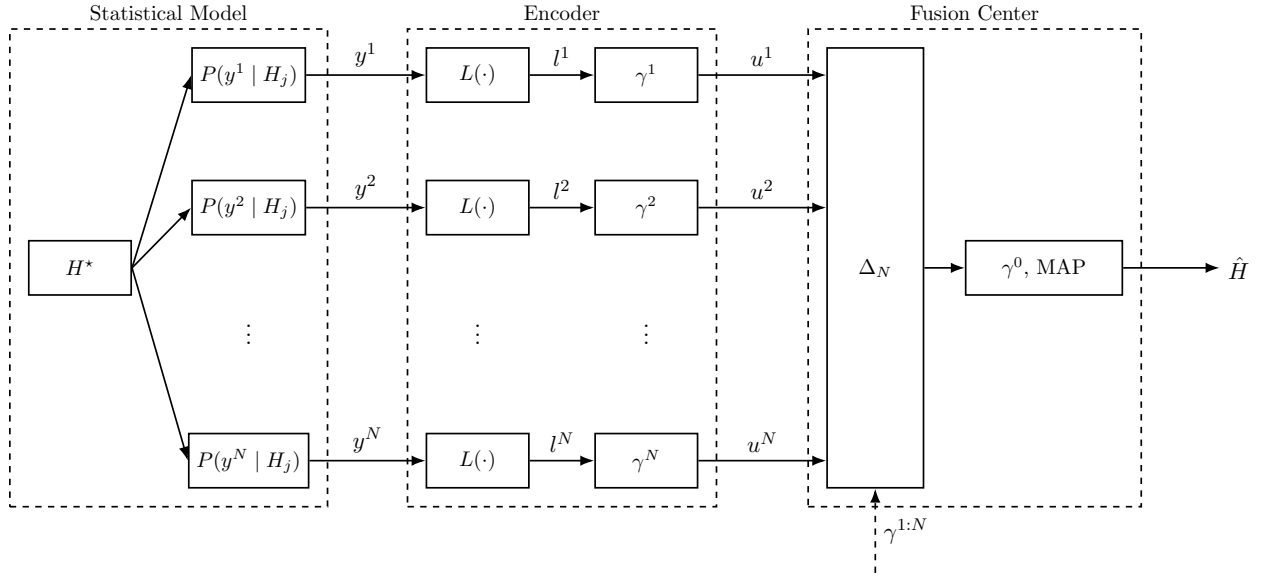


Figure 1: Block diagram of the decentralized detection system. The source H^* generates the hypothesis observed by N sensors as $y^i | H_j$. Each sensor reduces its observation to the likelihood ratio $l^i = L(y^i)$, which is a sufficient statistic for H , and quantizes it via the threshold policy γ^i into a message u^i . The fusion center forms the statistic Δ_N from all messages together with the realized encoding policies $\gamma^{1:N}$ (dashed), and applies the MAP rule γ^0 to produce the decision $\hat{H}$.