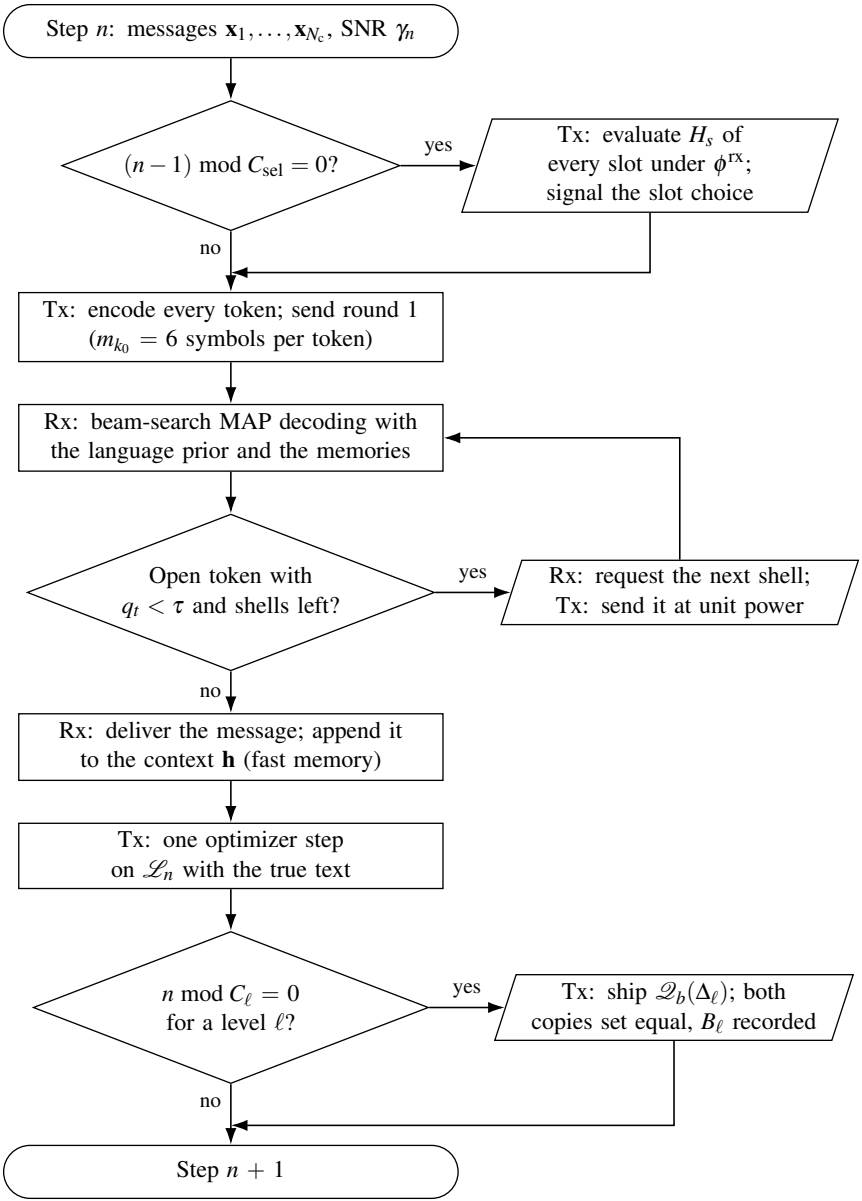

Step n: messages $\mathbf{x}_1, \ldots, \mathbf{x}_{N_c}$, SNR γ_n
$(n-1) \bmod C_{\text{sel}} = 0$?
yes
Tx: evaluate H_s of every slot under ϕ^{rx}; signal the slot choice
no
Tx: encode every token; send round 1 ($m_{k_0} = 6$ symbols per token)
Rx: beam-search MAP decoding with the language prior and the memories
Open token with $q_t < \tau$ and shells left?
yes
Rx: request the next shell; Tx: send it at unit power
no
Rx: deliver the message; append it to the context $\mathbf{h}$ (fast memory)
Tx: one optimizer step on $\mathscr{L}_n$ with the true text
$n \bmod C_\ell = 0$ for a level ℓ?
yes
Tx: ship $\mathscr{Q}_b(\Delta_\ell)$; both copies set equal, B_ℓ recorded
no
Step $n+1$