

(a) Selective refinement of one message

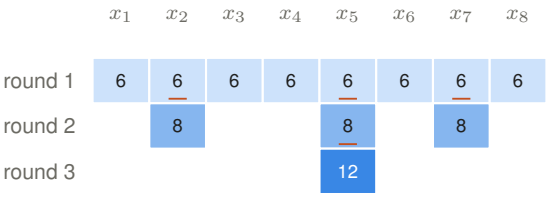

Numbers: symbols received for the token after the round. A red bar marks a request: the token's confidence q_t was below τ after decoding, so its next shell is sent. Every open token costs one request decision per round on the return link. Here: $(5 \cdot 6 + 2 \cdot 8 + 12)/8 = 7.25$ symbols per token, 3 rounds. Illustrative.

(b) When each memory reaches the receiver

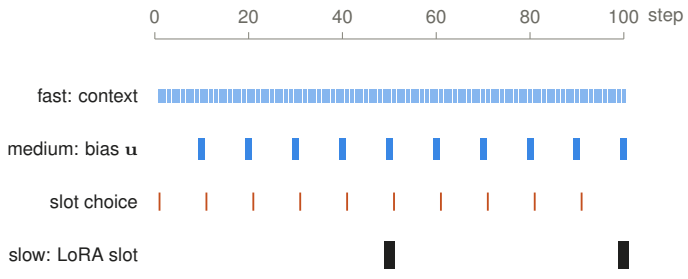

Context grows with every decoded message and costs nothing on the air. The medium memory is shipped every 10 steps (6.3 kbit), the active LoRA slot every 50 steps (1.18 Mbit), and the slot choice is signaled every 10 steps, before the messages of the step ($\lceil \log_2(K_\mathrm{s}+1) \rceil = 2$ bits for $K_\mathrm{s} = 2$ slots). Average over the stream: 24.2 kbit per step. Values at 8 bits per parameter, from the bit ledger.