

Data Structures

Andrew Rosen

Contents

I	Preliminaries	9
1	Introduction	11
1.1	What is a Data Structures Course	11
1.2	Why This Book?	11
1.2.1	Where Does This Book Fit Into a Computer Science Curriculum	11
1.2.2	What Are My Base Assumptions about the Reader? . . .	11
1.3	To The Instructor	12
1.3.1	How to Use	12
1.4	To The Student	12
1.4.1	How to use	12
2	Functions and How They Work	13
2.1	Function vs Method	13
2.2	Argument vs Parameter	13
2.2.1	Does anyone actually care?	14
2.3	Passing Arguments	14
2.3.1	How it Works in Java	14
2.3.2	How it works in Python	15
3	The Array	17
3.1	Why Arrays	17
3.2	Java and Arrays	17
3.3	Python and Arrays	18
3.4	How an Array Works	18
3.4.1	Operations	18
3.4.2	Array Internals and the Memory Formula	19
3.5	Common Array Algorithms	19
3.5.1	Finding Values in an Array	19
3.5.2	Limitations	19
4	Analyzing Algorithms	21
4.1	Cost	21
4.1.1	Time	21
4.1.2	Space	22
4.1.3	Energy	22
4.2	What is Algorithm Analysis	22
4.3	Big O Notation	26

4.3.1	Space Complexity	26
4.4	Examples with Arrays	26
4.4.1	Selection Sort	27
4.4.2	Bubble Sort	27
4.4.3	Insertion Sort	27
4.4.4	Other Sorting Algorithms	27
4.5	The Formal Mathematics of Big O Notation	27
4.6	Other Notations	27
4.7	When To Ignore Costs	27

II Lists 29

5	Array Lists	31
5.1	What is a List?	31
5.1.1	Lists in Java	32
5.2	Generics	32
5.2.1	What are they?	32
5.2.2	But Why?	33
5.3	List Operations	33
5.3.1	Size	33
5.3.2	Add	33
5.3.3	Remove	33
5.3.4	Get	34
5.3.5	Set	34
5.4	ArrayLists	34
5.5	Example Algorithms	34
5.6	Building an ArrayList	35
5.6.1	Caveats	35
5.6.2	Instance Variables	35
5.6.3	Constructor	36
5.6.4	Size	38
5.6.5	The Add Method	38
5.6.6	toString and __str__	43
5.6.7	Get and Set	44
5.6.8	Remove	45
5.7	Analysis	46
5.7.1	Add/Remove	46
5.7.2	Get/Set	46
5.7.3	A Note on Storage	46
5.8	A Few More Useful Methods	46
5.8.1	Constructors	46
5.8.2	Manually Adjusting the Capacity	47
5.8.3	Adding Multiple Items in One Invocation	47
5.9	Exercises	48
5.9.1	Remove All Instances	48
5.10	Source Code	49
5.10.1	Java	49
5.10.2	Python	53

6	Linked Lists	57
6.1	Connecting Nodes into a list.	58
6.2	Building a Singly LinkedList	58
6.2.1	The Node	58
6.2.2	Instance Variables and Constructor	59
6.2.3	Adding	59
6.3	Get and Set	63
6.3.1	Get	63
6.3.2	Set	63
6.4	Remove	64
6.5	Analysis	64
6.5.1	Some Algorithms Play Better	64
6.6	Potential Project/Practice/Labs	64
6.7	Source Code	64
7	Stacks	67
7.1	Stack Operations	67
7.2	Building a Stack	67
7.3	Built-in Stacks	67
7.4	Solving Problems with A Stack	68
7.5	Mazes - Stacks and Backtracking	68
7.6	Paren	68
8	Queues	71
8.1	Linked Based Implementation	71
8.2	Array Based Implementation	71
III	Recursion	73
9	Recursion	75
9.1	Introduction	75
9.2	Recursive Mathematics	75
9.2.1	Fibonacci	75
9.3	Printing Recursively	75
9.4	Recursive Linear Search	75
9.5	Binary Search	75
9.5.1	Runtime Analysis	75
9.6	Recursive Backtracking	76
9.6.1	Mazes Again	77
9.6.2	The Eight Queens Puzzle	77
9.6.3	Additional Problems left to the Reader	78
9.7	Recursive Combinations	78
9.8	Recursion and Puzzles	78
9.9	Recursion and Art	78
9.10	Recursion and Nature	78

10	Trees	79
10.1	The Parts of a Tree	79
10.1.1	Where the Recursion comes in	80
10.2	Binary Search Trees	80
10.3	Building a Binary Search Tree	80
10.3.1	The Code Outline	80
10.3.2	Add	81
10.3.3	Contains	81
10.3.4	Delete	81
11	Heaps	83
11.1	Priority Queues	83
11.2	Removing From other locations	83
12	Sorting	85
12.1	Quadratic-Time Algorithms	85
12.1.1	Bubble Sort	85
12.1.2	Selection Sort	85
12.1.3	Insertion Sort	85
12.2	Log-Linear Sorting Algorithms	85
12.2.1	Tree Sort	85
12.2.2	Heap Sort	86
12.2.3	Heapify	86
12.2.4	Quick Sort	86
12.2.5	Merge Sort	86
12.3	Unique Sorting Algorithms	86
12.3.1	Shell Sort	86
12.3.2	Radix Sort	86
12.4	State of the Art Sorting Algorithms	86
12.4.1	Tim Sort	86
12.4.2	Quick Sort	86
12.5	But What if We Add More Computers: Parallelization and Dis- tributed Algorithms	86
12.6	Further Reading	87
12.6.1	Pedagogical Sorting Algorithms	87
IV	Hashing	89
13	Sets	91
13.1	Operations	91
13.1.1	Adding an item to a Set	91
13.1.2	Removing an item to a Set	91
13.1.3	Union	91
13.1.4	Intersection	91
13.1.5	Set Difference	91
13.1.6	Subset	91
13.2	Operation Analysis	91
13.2.1	TreeSet Vs HashSet Vs Linked Hash Set	91
13.3	Sets and Problem Solving	91

13.3.1	Checking for Uniqueness or Finding Duplicates	92
14	Maps	93
14.1	What is a Map	93
14.2	Functions	93
14.3	Costs	93
14.3.1	Tree-Based Map	93
14.3.2	Hash Table Map	93
15	Hash Tables	95
15.1	Creating a Hash Function	95
16	Map Reduce	97
16.1	Map	97
V	Relationships	99
17	Graphs	101
17.1	Introduction and History	101
17.2	Qualities of a Graph	101
17.2.1	Vertices	101
17.2.2	Edges	101
17.3	Special Graphs and Graph Properties	101
17.3.1	Planar Graphs	101
17.3.2	Bipartite Graphs	102
17.3.3	Directed Acyclic Graphs	102
17.4	Building a Graph	102
17.4.1	Adjacency List	102
17.4.2	Adjacency Matrix	102
17.5	Graph Libraries	102
17.5.1	Java - JUNG	102
17.5.2	Python - networkx	102
17.6	Graphs, Humans, and Networks	102
17.6.1	The Small World	102
17.6.2	Scale Free Graphs	102
17.7	Graphs in Art and Nature - Voronoi Tessellation	102
18	Graph Algorithms	103
18.1	Searching and Traversing	103
18.1.1	Breadth First Search	103
18.1.2	Depth First Search	103
18.2	Shortest Path	103
18.2.1	Dijkstra's Algorithm	103
18.2.2	Bellman-Ford	103
18.3	Topological Sorting	103
18.3.1	Khan's Algorithm	103
18.4	Minimum Spanning Trees	103
18.4.1	Kruskal's Algorithm	103
18.4.2	Prim's Algorithm	103

Part I

Preliminaries

Chapter 1

Introduction

1.1 What is a Data Structures Course

Data Structures is all about defining the different ways we can organize data.

1.2 Why This Book?

This textbook is free.

It is both Java and Python.

1.2.1 Where Does This Book Fit Into a Computer Science Curriculum

Education in Computer Science is based around three core topics: translating the steps of solving a problem into a language a computer can understand, organizing data for solving problems, and techniques that can be used to solve problems. These courses typically covered in a university's introductory course, data structures course, and algorithms course respectively, although different universities decide exactly what content fits in which course. Of course, there is are lot more concepts in computer science, from operating systems and low level programming, to networks and how computers talk to each other. However, all these concepts rely on the knowledge gained in the core courses of programming, data structures, and algorithms.

This textbook is all about Data Structures, the middle section between learning how to program and the more advanced problem solving concepts we learn in Computer Science. Here, we focus on mastering the different ways to organize data, recognize the internal and performative differences between each structure, and learn to recognize the best (if there is one) for a given situation.

1.2.2 What Are My Base Assumptions about the Reader?

This textbook assumes that the student has taken a programming course that has covered the basics. Namely: data types such as ints, doubles, booleans, and strings; if statements, for and while loops; and object orient programming. This

book is also suitable for the self taught programmer who has not learned much theoretical programming

1.3 To The Instructor

You'll note that this textbook lacks some of the features found in commercially available textbooks. The biggest of these is slides.

For the most part, slides are too static to help students understand how to code.

Does the lack of varied exercises make cheating on assignments easier as semesters go on? Yes, but that bridge was burned long ago. The cheating student can plagiarize from various websites or anonymously hire another to do their work for them. However, the student who cheats isn't exactly clever and certainly hasn't been exposed to much game theory. They will often cheat from the same source.

In addition, during the writing of this text, technologies such as GPTChat were released. This hasn't so much burned the bridge as dropped napalm on the entire surrounding forest. Newer technologies will then salt that earth. I recommend an open and honest dialogue with your students and at least 50% of their grade being the result of evaluations and assessments you do in class. This can range from proctored exams to flipping the classroom and giving students the chance to work on homework in class, where they are much more likely to turn to you or their peers for help.

1.3.1 How to Use

1.4 To The Student

1.4.1 How to use

Chapter 2

Functions and How They Work

This will be an extremely short chapter, but an important one. We are already going to assume that you know what a function, a method, or procedure is and that you have written them before. After all, data structures is a point continuing your education in programming, not beginning it. That said it is possible that you missed some subtleties along the way.

That's understandable - programming is a very large topic and there's more than enough concepts that no one who graduates with a degree in computer science can be expected to be an expert in every area any more.

With this in mind, let me take the time to review some subtleties surrounding the vocabulary of functions.

2.1 Function vs Method

You'll often hear programmers use these two terms interchangeably to refer to what essentially amounts to a subprogram. But what is the difference? I like to explain it this way: functions are the verbs of the programming language. When we create a new function, we are creating a new verb in the programming language we are working in. Methods are a special type of function that are closely linked to objects; they are the actions or verbs you want your objects to perform.

Java blurs this a bit with **static** methods, but for the purposes of this text, when I write *method*, I am talking about Java's *instance methods*. *Function*, in the context of this book, is analogous to **static methods**. Similarly, if you are coming from python, when I say function, I am talking about a boring top-level, unindented function such as the ones you've been writing since you first learned python. Method would refer to the functions you create as part of your classes.

2.2 Argument vs Parameter

An argument is the actual value you pass in, the parameter is the variable that accepts it.

```

public static void doubleThis(int num) {
    return 2*num;
}

public static void main(String[] args){
    int x = 7;
    int y = doubleThis(x);
}

def doubleThis(num):
    return 2*num

x = 7
y = doubleThis(x)

```

In the above examples, `x` is an argument and `num` is a parameter.

2.2.1 Does anyone actually care?

I cared enough to look it up, but I also had to look it up to double check that I'm correct and I keep coming back to this page as a reference for myself. In a casual situation or talking with another programmer, everyone will be able to *grok* your meaning from the context, but I would take care to get it correct for your assignments and exams, much like you would take care to avoid using “ain't” in a formal essay.

2.3 Passing Arguments

The vast majority of programming languages are *pass by copy* with a huge honking asterisk.

- Pass by copy means that when something is input as the argument to a function, the function gets a copy of the thing you are passing to it.
- The *huge honking asterisk* is that you are almost always passing a *reference* or *pointer* to an object, not the object itself. The reason for this is that if we had a super mega huge object, copying it would take up a super mega huge amount of time and memory.

2.3.1 How it Works in Java

In Java, we have two broad categories of data types: primitives and objects.

When you pass a primitive, such as an `int` or `double`, the value gets copied from where it is stored in memory and copied into the argument.

When you create an object, as below:

```
Scanner scan = new Scanner(System.in);
```

The variable `scan` will hold not the Object that was created by the constructor, but the *memory location*, or *reference* of where to find it. Look at the code below where we create an array in `main` and then pass it to another method, `setIndexZeroToZero`:

```
public static void setIndexZeroToZero(int[] array) {
    array[0] = 0;
}

public static void main(String[] args) {
    int[] arr = {5,5,6,6};
    System.out.println(Arrays.toString(arr));
    // prints [5, 5, 6, 6]

    setIndexZeroToZero(arr);
    System.out.println(Arrays.toString(arr));
    // prints [0, 5, 6, 6]
}
```

Because the memory location of the array `arr` was passed to `array`, the method `setIndexZeroToZero` was dealing with the same object.

Keep in mind that some objects are immutable, like any `String`. This means you can't actually change them. Operations that seem like they change them like replacing part of a string or converting things from upper case to lower case are all returning a newly generated string.

2.3.2 How it works in Python

Practilcally speaking , everything in Python works the same as in Java. Everything in Python is an object (including the integers, which are immutable.), so when things are passed or assigned into variables, the variable stores the memory location, or *reference*, to the object. Thus when you pass in a variable to a function, the function receives the memory location of the object; data is never duplicated.

Chapter 3

The Array

3.1 Why Arrays

- because new language: Since this is a data structures course, I assumed that students have had exposure to arrays or array like objects. This chapter goes into a bit of a deeper detail that may have been glossed over and Introduces the topic in the appropriate language if need be.

In other words, I assume you know what an array is , but not necessarily how to use it in Java or Python¹.

- because internal memory lookup
- Because we need to make sure internal knowledge is cohesive (eg arrays of objects are arrays of pointers/references)

3.2 Java and Arrays

The Array is a built in class in Java, but the syntax is a bit unique ²

To create an array in Java we do:

```
Type[] myArray = new Type[sizeOfArray]
```

Here, every item in the array is of whatever **Type** we want, which could be a Class or primitive. Arrays can be whatever integer size we desire, but once set it cannot be changed. This is because to create an array, the computer allocates a contiguous block of memory. If we wanted to resize it, there is no guarantee that this chunk of memory won't have things directly before or after it, preventing us from safely extending its range.

¹Although we use lists in python

²Enough so that I constantly had to look up how to do it my first two years of undergraduate studies, so don't feel too bad if you have to do the same.


3.3 Python and Arrays

Python doesn't really do arrays in the same way. It instead uses Lists, as we'll see in Chapter 5. `myNotArray = []`³ does not actually make an array like you assume it would in some other language. Instead it makes A list (specifically an array list) to contain these items. This works exactly like an array in other languages, but you get access to some nifty operations in Python, like slicing, concatenation, and built-in methods. In addition, Python dynamically resizes this array if we need it bigger or smaller.⁴

However, if you really want or need to use an array in python, you can. There are two ways to accomplish this. The first way is the built in `array` package. This builds a wrapper for the more primitive but efficient c-based array. The python package `numpy` contains yet *another* type of array, this time much more focused on mathematical operations. In short, if you're working in python, use a list unless you know you should use something more specialized.

3.4 How an Array Works

As previously mentioned, an array creates a contiguous block of memory. But what does this actually mean?



Here, `arr` does not contain the array; it hold the memory location, the reference, the pointer to the array. The correct term varies on the language you are using, but the point is that `arr` tells you the location of the array rather than holding the array itself.

3.4.1 Operations

To review, arrays have two operations and one attribute: storing a value at an index, retrieving a value from an index, and obtaining the size.

For an array `arr`, retrieving a value from an array is and storing it in some variable is done with:

```
myVar = arr[index]
```

and to store something in `arr`, you use:

```
myVar = arr[index]
```

Interestingly enough, this is one of the few consistent across multiple programming languages.

Figuring out the length of an array in Java⁵ is done with

```
int len = arr.length;
```

and in python, a simple `len(arr)` works.

³On styles: Java convention is to use camel case for variable types (`myVariableName`), while python convention is to use underscores (`my_variable_name`). I will be using the Java style camel-casing for variables throughout the book for consistency and because it is my preference.

⁴We cover the specifics in Chapter ??

⁵This is one of the little things in Java that can be a source of frustration. Strings use `.length()`, arrays use `.length`, and Collections like Lists and Sets use `.size()`.

3.4.2 Array Internals and the Memory Formula

So how does an array actually work? How do you actually retrieve a value from an index? The most crucial thing to keep in mind in this textbook is when you see something like the code below:

```
variable = expression;
```

The left side is always a variable. The expression on the right side always⁶ yields some memory location. This means you should repeat to yourself “the memory location on the right gets stored in the variable on the left.”

This means that

```
int[] numbers = new int[10];
```

stores a memory location in `numbers`. It does not store 10 integers in `numbers`. It only tells you where to find them. Specifically, it stores the memory location of index 0 of the array. This is true for not only Java, but C as well, and almost every programming language⁷.

This means that

What if we aren’t dealing with primitives, but with objects like Strings instead? In this case, each slot in the array doesn’t hold the object itself but instead *a reference to that object*. Thus, each slot needs to be big enough to hold a memory address, ie 32 bits or 64 bits depending on the machine.

3.5 Common Array Algorithms

3.5.1 Finding Values in an Array

Finding the Minimum

Hopefully you know this one by now! Simply assume the first item is the smallest item, then check it against every other item in the list. If an item is smaller than the current item,

```
public static int findMin(int[] ) {  
  
}
```

Finding the Average

3.5.2 Limitations

Arrays are awesome solutions for many problems, but they are lacking in ability for some problems. Consider the following exercise:

⁶except for primitives, like `int` in Java

⁷Python and other interpreted languages are slightly more complicated because we are dealing with array lists, thus one additional level of abstraction, so this storage just happens a layer deeper. Esoteric languages like *ook* and *Malbolge* prevent me from making a statement like “all languages.”

Given a string of text, determine what the most common character of text is.

Unless you’ve seen this problem before, there is no obvious solution. Considerable thought eventually lands on an idea: characters are just integers, so we could assign each one of the characters an index and increment the index each time we see the character.

```
public static char mostFrequent(String text) {
    int[] tally = new int[128];
    for(char c : text.toCharArray()) {
        tally[(int) c] += 1;
    }

    indexWithHighest = 0;
    for(int index = 0; index < 128; index++) {
        if( tally[index] > tally[indexWithHighest]){
            indexWithHighest = index;
        }
    }
    return (char) indexWithHighest;
}
```

However, this has some serious limitations. For one, this breaks if we are not using ascii. What if the text is “” or other non-english text? You could create a larger array for all 100000+ unicode characters, but this begins to become less and less feasible. And now what if we change the problem to:

Given a string of text, determine what the most common word is.

This suddenly becomes an extremely annoying problem to solve with just arrays⁸. We will solve this problem when we visit Maps in Chapter 14, which are much better suited for this job than arrays.

The other limitation of arrays that their size is immutable. Once an array has been declared, we cannot change its size. This is rather inconvenient for a number of applications where we may not know how many items to store. This will be the focus of our first new data structure: The List.

⁸Those of you coming from Python can stop shouting “use dictionaries!” at the top of your lungs.

Chapter 4

Analyzing Algorithms

Or we would look at the list, but we need to talk about Math. Sorry for the bait-and-switch, but it will make sense shortly.

You don't need much math to be a good programmer, but if you want to be an amazing programmer, you probably need math or very math adjacent skills.

4.1 Cost

Every function, operation, algorithm, or what have you that a computer performs has a *cost*. In fact, there are always multiples costs; we often just focus on the most important one or two costs.

What is most important depends on context. However, in the vast majority of cases, the most important cost to focus on is **time**. When our program is eating away at our storage resources like a hungry child slurping up spaghetti, we can always go out and buy more memory/storage/RAM. If our program requires a large amount of energy consumption, energy is readily available from a variety of sources: batteries, power plugs, internal combustion engines, the giant fusion reactor in the sky.

Measuring Cost

When we measure cost, we need to do abstractly. When we measure the amount of time that an algorithm takes, we look at the number of operations that will be executed, not the overall elapsed time.

4.1.1 Time

A time cost is a measure of not just how long it takes a program to finish executing, but also how the length of execution is affected by adding additional item.

Time is almost always *the most important cost*. We cannot go out and buy another weeks worth of time. You can't hand a bunch of money to the reaper and ask for a deferral. You can't buy another minute to spend with your mother¹ Yes, processors get faster as technology marches on, but they get

¹Call your mother. She would love to hear from you.

faster slowly and Moore's law ostensibly has its limits. The only way to make our programs realistically run faster is to make them more efficient. And **Big O notation** is the way we will be measuring that efficiency.

4.1.2 Space

For data structures, we will be measuring their space efficiency in terms of *auxiliary* cost, in other words, how much extra space we need to use over the space used for the items itself. To clarify, any data structure that contains n items of roughly the same size will use $n \times \text{sizeof}(\text{item})$ space at minimum, no matter what data structure we use. This accounts for the Each data structures

4.1.3 Energy

While not something this book concerns itself with, some programmers need to be wary of the amount of energy an algorithm consumes. If energy is expensive and/or battery life needs to be conserved, then choosing an energy efficient algorithm might be a better choice, even if the time or space complexity is higher. Some examples where energy use is a large concern is Mobile Ad-Hoc Networks (MANETs) and battery powered cameras.

4.2 What is Algorithm Analysis

It is very common for beginning computer science students to compare their programs with one another. You may also have noticed that it is common for computer programs to look very similar, especially the simple ones. An interesting question often arises. When two programs solve the same problem but look different, is one program better than the other?

In order to answer this question, we need to remember that there is an important difference between a program and the underlying algorithm that the program is representing. As you have learned, an algorithm is a generic, step-by-step list of instructions for solving a problem. It is a method for solving any instance of the problem so that given a particular input, the algorithm produces the desired result. A program, on the other hand, is an algorithm that has been encoded into some programming language. There may be many programs for the same algorithm, depending on the programmer and the programming language being used.

To explore this difference further, consider the functions shown in Listing 1 and 1. This function solves a familiar problem, computing the sum of the first n integers. The algorithm uses the idea of an accumulator variable that is initialized to 0. The solution then iterates through the n integers, adding each to the accumulator

```
public class FindSum {
    public static long sumOfN(int n) {
        long theSum = 0;
        for (int i = 1; i <= n; i++) {
            theSum = theSum + i;
        }
        return theSum;
    }
}
```

```

    }

    public static void main(String[] args) {
        System.out.println(sumOfN(10));
    }
}

def sum_of_n(n):
    the_sum = 0
    for i in range(1, n + 1):
        the_sum = the_sum + i

return the_sum

print(sum_of_n(10))

```

Now look at the functions in Listing 1 and 1. At first glance it may look strange, but upon further inspection you can see that this function is essentially doing the same thing as the previous one. The reason this is not obvious is poor coding. We did not use good identifier names to assist with readability, and we used an extra assignment statement that was not really necessary during the accumulation step.

```

public class FindSum2 {
    public static long foo(int tom) {
        long fred = 0;
        for (int nancy = 1; nancy <= tom; nancy++) {
            long joanne = nancy;
            fred = fred + joanne;
        }
        return fred;
    }

    public static void main(String[] args) {
        System.out.println(foo(10));
    }
}

def foo(tom):
    fred = 0
    for bill in range(1, tom + 1):
        barney = bill
        fred = fred + barney

    return fred

print(foo(10))

```

The question we raised earlier asked whether one method is better than another. The answer depends on your criteria. The method `sumOfN` is certainly better than the method `foo` if you are concerned with readability. In fact, you

have probably seen many examples of this in your introductory programming course since one of the goals there is to help you write programs that are easy to read and easy to understand. In this course, however, we are also interested in characterizing the algorithm itself. (We certainly hope that you will continue to strive to write readable, understandable code.)

Algorithm analysis is concerned with comparing algorithms based upon the amount of computing resources that each algorithm uses. We want to be able to consider two algorithms and say that one is better than the other because it is more efficient in its use of those resources or perhaps because it simply uses fewer. From this perspective, the two methods above seem very similar. They both use essentially the same algorithm to solve the summation problem.

At this point, it is important to think more about what we really mean by computing resources. There are two different ways to look at this. One way is to consider the amount of space or memory an algorithm requires to solve the problem. The amount of space required by a problem solution is typically dictated by the problem instance itself. Every so often, however, there are algorithms that have very specific space requirements, and in those cases we will be very careful to explain the variations.

As an alternative to space requirements, we can analyze and compare algorithms based on the amount of time they require to execute. This measure is sometimes referred to as the execution time or running time of the algorithm. One way we can measure the execution time for the function `sumOfN` is to do a benchmark analysis. This means that we will track the actual time required for the program to compute its result. In Java, we can benchmark a function by noting the starting time and ending time within the system we are using. In the `System` module there is a method called `nanoTime` that will return the amount of time that the Java virtual machine has been running, in nanoseconds. By calling this function twice, at the beginning and at the end, and then computing the difference, we can get the number of seconds (fractions in most cases) for execution.

Listing 2.2.3 lets you enter the number you want to sum up to (`n`). It then invokes the `sumOfN` method 25 times and calculates the time required for each trial:

```
import java.util.Scanner;

public class Timing {
    public static long sumOfN(long n) {
        long theSum = 0;
        for (int i = 1; i <= n; i++) {
            theSum = theSum + i;
        }
        return theSum;
    }

    public static void main(String[] args) {

        Scanner input = new Scanner(System.in);
        System.out.print("Find sum from 1 to n: ");
        long n = input.nextInt();
```



```

        for (int trial = 0; trial < 25; trial++) {
            long startTime = System.nanoTime();
            long result = sumOfN(n);

            double elapsed = (System.nanoTime() -
                ↪ startTime) / 1.0E9;
            System.out.printf("Trial %d: Sum %d: time %.6f sec.%n",
                trial, result, elapsed);
        }
    }
}

```

Listing 2.2.3 shows the original `sumOfN` function with the timing calls embedded before and after the summation. The function returns a tuple consisting of the result and the amount of time (in seconds) required for the calculation. Here is start and end of the output when we enter 10000 for the limit of the sum:

```

Trial 0: Sum 50005000: time 0.003886 sec.
Trial 1: Sum 50005000: time 0.004009 sec.
Trial 2: Sum 50005000: time 0.000186 sec.
Trial 3: Sum 50005000: time 0.000185 sec.
...
Trial 20: Sum 50005000: time 0.000125 sec.
Trial 21: Sum 50005000: time 0.000124 sec.
Trial 22: Sum 50005000: time 0.000125 sec.
Trial 23: Sum 50005000: time 0.000124 sec.
Trial 24: Sum 50005000: time 0.000124 sec.

```

Why does the time go down from .003886 seconds to .000124? Because the Java Virtual machine and the computer hardware itself cache results, keeping them in memory for future access. We run the trial loop 25 times in order to give the cache time to stabilize.

We discover that the time is fairly consistent and it takes on average about 0.000125 seconds to execute that code. What if we run the function adding the first 100,000 integers? (Showing only the final five trials)

```

Trial 20: Sum 5000050000: time 0.001225 sec.
Trial 21: Sum 5000050000: time 0.001226 sec.
Trial 22: Sum 5000050000: time 0.001225 sec.
Trial 23: Sum 5000050000: time 0.001224 sec.
Trial 24: Sum 5000050000: time 0.001224 sec.

```

Again, the time required for each run, although longer, is very consistent, averaging about 10 times more seconds. For $n = 1,000,000$ we get:

```

Trial 20: Sum 500000500000: time 0.012350 sec.
Trial 21: Sum 500000500000: time 0.012411 sec.
Trial 22: Sum 500000500000: time 0.012353 sec.
Trial 23: Sum 500000500000: time 0.012443 sec.
Trial 24: Sum 500000500000: time 0.012447 sec.

```

In this case, the average again turns out to be about 10 times the previous experiment.

Now consider Listing 2.2.4, which shows a different means of solving the summation problem. This method, `sumOfNImproved`, takes advantage of a closed equation $\sum_{i=1}^n i = 1 + 2 + 3 + \dots + (n - 1) + n = \frac{(n)(n+1)}{2}$ to compute the sum of the first n integers without iterating².

```
public static long sumOfNImproved(long n) {
    long theSum = n * (n + 1) / 2;
    return theSum;
}
```

We then change the call in line 23 of Listing 2.2.3 to:

```
long result = sumOfNImproved(n);
```

If we do the same benchmark measurement with this revised code, using five different values for n (10,000, 100,000, 1,000,000, 10,000,000, and 100,000,000), we get the following results from averaging the last five trials:

```
Sum 50005000:      time 0.0000088 sec.
Sum 5000050000:    time 0.0000092 sec.
Sum 500000500000:  time 0.0000082 sec.
Sum 50000005000000: time 0.0000078 sec.
```

There are two important things to notice about this output. First, the times recorded above are shorter than any of the previous examples. Second, they are very consistent no matter what the value of n . It appears that `sumOfNImproved` is hardly impacted by the number of integers being added.

But what does this benchmark really tell us? Intuitively, we can see that the iterative solutions seem to be doing more work since some program steps are being repeated. This is likely the reason it is taking longer. Also, the time required for the iterative solution seems to increase as we increase the value of n . However, if we ran the same function on a different computer or used a different method language, we would likely get different results. It could take even longer to perform `sumOfNImproved` if the computer were older.

We need a better way to characterize these algorithms with respect to execution time. The benchmark technique computes the actual time to execute. It does not really provide us with a useful measurement because it is dependent on a particular machine, program, time of day, compiler, and programming language. Instead, we would like to have a characterization that is independent of the program or computer being used. This measure would then be useful for judging the algorithm alone and could be used to compare algorithms across implementations.

4.3 Big O Notation

- What is big O
- how to read it

²This sequence of numbers is the **Triangular Number Series** and shows up a lot in analysis.

- Aside about big omega and theta
- How wrong usage annoys mathematician
- refers to cost in general, but used for time usually
- space complexity
- Common runtimes
- runtimes we'll focus on now
- runtimes we focus on later

4.3.1 Space Complexity

4.4 Examples with Arrays

- Retrieval - refer back to earlier chapter for address lookup
- Replacement
- Linear Search
- Binary Search

4.4.1 Selection Sort

4.4.2 Bubble Sort

4.4.3 Insertion Sort

4.4.4 Other Sorting Algorithms

4.5 The Formal Mathematics of Big O Notation

4.6 Other Notations

4.7 When To Ignore Costs

Part II

Lists

Chapter 5

Array Lists

The first data structure we will be studying is the list. The list is by far the most relatable data structure, as humans deal with lists on a regular basis.

5.1 What is a List?

When you get right down to it, lists are defined by order. We don't have to take advantage of this order, but its there. Populated lists have a first item and they have a last item.

Take a look at this quest below from a hypothetical fantasy game:

Quest: Slay the Dragon of Doom

- Get Sword of Dragonslaying
- Locate the map to Dragon Lair of Doom
- Travel to the Dragon Lair of Doom
- Slay the Dragon of Doom
- Return to the Castle

Here, the order is implied by the contents of the list - you can't beat the dragon without the macguffin and you certainly can't fight it without being able to find it. Generally speaking, going up against a dragon without any preparation is foolhardy in the extreme, but I digress.

Thus, you must get the special sword¹ first, and you must get the map to find the lair before you can physically travel there.

shopping list example

While lists are defined by order, we don't necessarily ascribe any meaning to the order. Take a look at the shopping list below:

¹What if its possible to get the map before the sword? We'll see much later this kind of quest and it's requirements are much better handled by a directed acyclic graph in Chapter 17, but this example is fine for teaching lists.

<Shopping List>

While bread is the first item on this list, being the first item in the shopping list in this case has no special meaning. It's not the most important item on the list², nor is it necessarily the item I'm going to pick up first.

Where arrays and lists differ is that lists can grow to an arbitrary size, whereas arrays are static. Arrays can't get bigger, lists can.

A note on terminology

An **array list** is a type of list. These are sometimes called dynamic arrays.

As mentioned in Section 3.3, Python doesn't have arrays. If you've been programming in Python, you've been using an array list the entire time you've declared []. They are usually just called lists rather than array lists for simplicity's sake.

I will be using the Java nomenclature for the majority of the book as this allows me to be clear about the types and implementations of data structures.

5.1.1 Lists in Java

An array list in Java is represented by the class **ArrayList**. Here is an example:

An Aside about interfaces

This textbook assumes that you have already taken your requisite object oriented programming course, but in case you haven't or it's been a while, I'll review briefly here.

An interface is about as abstract as a class can get and ties deeply to how Java deals with polymorphism. In fact, an interface contains only abstract methods, which must be implemented by the inheriting class.

What about python? Python deals with polymorphism using duck typing, originating from the idiom "If it looks like a duck, swims like a duck, and quacks like a duck, then it probably is a duck"

Here is the source code

5.2 Generics

You may have noticed that when we create the arraylist

5.2.1 What are they?

Before we get too deep into lists, we need to have a discussion about generics. Generics are a way of restricting and specifying what types can go into a collection.

²obviously, that's the cookies

5.2.2 But Why?

Using generics has two big purposes: strong typing and the lack of need for casting. This textbook deals with handling collections of data. In fact, the Java superclass for a lot of the topics we cover is called a `Collection`. Generics allow us to predefine what precisely the collection will hold. If we do not do so, the only thing we can assume a collection holds is objects of type `Object`.

This creates two big headaches

- In strongly typed languages like Java, we will need to cast objects to the appropriate type when extracting them. In duck-typed languages like Python, we rely on thoughts and prayers.
- There are no safeguards to prevent us from inserting items of the wrong type into the collection.

5.3 List Operations

5.3.1 Size

We need some easy way of knowing how big our lists are, if for no other reason than to make sure our add and remove methods can figure out their valid indices.

5.3.2 Add

By default, we add items to the end of the list, but we can also add items to any index we want.

When we add an item at some specific index i , the item at i and all indices to the right shift over one. In other words, what was at i is now at $i + 1$, what was at $i + 1$ is at $i + 2$, and so on.

This also an understandable restriction to adding items to a list - we cannot add an item to any index greater than `myList.size() + 1`. Anything greater wouldn't be at the end of the list; it would be beyond it. The same goes for negative indices³.

<possible picture showing a legal and an illegal add>

We will cover this operation in more detail when we implement the add method for the arraylist

5.3.3 Remove

We can remove items from a list much in the same way we can add them. When removing an item at index i , the

For example, in the image below, we are removing the item at index 3, the word "cookie," from the list.

<image before>

C is for cookie that's good enough for me

<image after>

C is for that's good enough for me

³Python does allow negative indexes, but we will ignore that for now

5.3.4 Get

Get is how we retrieve our items from the list. Given an index, get will give us the value that has been stored at that index.

5.3.5 Set

5.4 ArrayLists

An array list, as you might have guessed, are lists built using *arrays*.⁴ They work by growing or shrinking the array⁵ automatically as items are added or removed from the list, giving the illusion that the data structure can hold an arbitrary amount of data.

We'll go into the specifics of how this works in Section 5.6.

Java's ArrayLists

Java's `ArrayList`

Python's Lists

Python's lists, such as below:

```
l = [1,2,3] # this is a list, not an array!
```

are actually array lists!

Python uses a different vocabulary for some of the methods we'll be implementing below. For example, take the action of adding an item to a list. Python uses the `append` method to add an item to end of the list and `insert` to put an item into the middle of the list. Java (who's vocabulary we'll be following), uses `add` for both these contexts.

5.5 Example Algorithms

```
public static <E> boolean isPermutation(List<E> listA,
    ↪ List<E> listB) {

    if(listA.size() != listB.size()) {
        return false;
    }
    for(int i = 0; i < listA.size() ; i++){
        E item = listA.get(i);
        int countA = 0;
        int countB = 0;

        for (E element : listA) {
            if(item.equals(element)){
                countA++;
            }
        }
    }
}
```

⁴Shockingly, many of the names we give things at this point actually make sense.

⁵A lie. As you'll see we don't actually change the size of an array; we create a new array of the appropriate size and copy everything over

```

        }
    }
    for (E element : listB) {
        if(item.equals(element)){
            countB++;
        }
    }
    if(countA != countB) {
        return false;
    }
}
return true;
}

```

5.6 Building an ArrayList

To truly understand how a data structure works we need to implement it ourselves. We will be making simpler versions of what's actually implemented in the language of your choice, but the logic and obstacles we need to overcome are the same.

5.6.1 Caveats

MyArrayList.java

We will not be implementing the `List` interface. We don't need to implement all the functions to get an understanding of how the fundamentals of an arraylist work. Implementing the list interface would take up a hideous amount of paper and get in the way of actually understanding the code.

myArrayList.py

For python, this will require some suspension of disbelief, as our array list will require using an array, and as previously discussed, arrays are shirked in favor of arraylists in python. We'll be using a list and pretending it's an array. Silly? Yes. But it will keep our code compact and easier to understand.

5.6.2 Instance Variables

Believe it or not, we only need to keep track of three instance variables to get our arraylist working.

theData We need an array to actually store the items. This is it.

size Size here refers to the total number of items we have stored in the array.

capacity This is the number of items the underlying array in our list can hold. It is the maximum size of the list before we have increase the capacity and move everything **theData** to a new array of length **capacity**. This is not strictly necessary as we can get it by querying **theData**'s length. However, making it it's own variable will help with the readability.

It is very easy to confuse size and capacity since they both deal with counting how many elements. When I talk about **size**, I am talking about the number of items we have stored in the list we are making. Capacity, on the other hand, depends on the length of the built-in array.

Java

```
public class MyArrayList<E> {

    private E[] theData
    private int size; // how many items are in the list
    private int capacity; // how many items the underlying
    → array can hold
```

First, note the <E> after MyArrayList. This means that we're saying:

- MyArrayList is designed to hold a specific type of object.
- Every E we see is a placeholder for some type, which will be that same across the entire lifespan of the object.

Python

In python, we will be creating our instance variables in the constructor below. We will end up with this at the end of Section 5.6.3.

```
class MyArrayList(object):
    def __init__(self):
        self.size = 0
        self.capacity = 10
        self.theData = [None]*self.capacity
```

5.6.3 Constructor

We need to set the variables to their initial values upon creating the arraylist. The **size** will be 0, since we won't have any objects stored in it yet. We will set the **initial** capacity to 10, as this is the default behavior of Java's ArrayList class. It's a small number and thus won't create much wasted space if we don't fill up **theData**. **theData** will be an empty array of **capacity** length. If **theData** becomes full, we will create a bigger array to hold our items using the **reallocate()** method (Section 5.6.5)

Java

With our constructor, we have one line of weird black magic in order to create an Array of E[]'s.

```
public MyArrayList(){
    size = 0;
```

```

        capacity = 10;
        theData = (E[]) new Object[10]; // this generates a
        ↪ warning
    }

```

So what's going on with the last line? Typically, when creating an array, we would just say:

```

//doing this in the constructor gives us an error.
TYPE[] myArray = new Type[desired_size];

```

However, Java won't let you create new `E` objects since there's no telling what the constructors will be. This rule extends to arrays of `E`, like so:

```
theData = new E[10];
```

However, when creating a new empty array of objects of any type, we're just making an array of nulls which will eventually be replaced by references to objects. Thus, even though the Java compiler will yell at us about Type safety, we can instead create an array of `Object` and then tell , since all references to any types are the same size.

```

// creating one array of nulls and telling Java
// its another type of array of nulls.
theData = (E[]) new Object[10];

```

Remember how Java and most modern programming languages deal with objects; if you're assigning an object to a variable, like in `Object o = new Object()`, we are storing a reference to that object. Thus, when we add an item to a list, what really happens is we'll be adding a reference to it - the instructions on how to find it in memory.

Python

Python is fairly straightforward, with the caveat that we are pretending `theData` is an array, and not a list.

```

class MyArrayList(object):
    def __init__(self):
        self.size = 0
        self.capacity = 10
        self.theData = [None]*self.capacity

```

Since built-in lists in Python grow and shrink like we would expect a list to, we initialize `theData` with 10 `None` objects⁶ to mimic the way an array would be initialized.

⁶This is the Python equivalent to the Java `null`.

5.6.4 Size

Now, we will add a size method to our list; fairly straightforward in Java.

```
public int size() {
    return size;
}
```

In Python, we can go ahead and use the built in `__len__` method, which can then be invoked with `len(myList)`.

```
def __len__(self):
    return self.size
```

Retrieving the size of our list is always $O(1)$, as we are just accessing a variable and returning its value.

5.6.5 The Add Method

Now it's time to dig into the bulk of our code: adding items to our list. To do this, I'll be creating two methods: one for adding to the end of the list (an extremely common operation) and one for adding at any index in the list.

In Java, we will overload these two methods and call them both `add`. We will have an `add(E item)` for adding to the end and an `add(int index, E item)` for every other case. In Python, these two `add` methods are called `append` and `insert` respectively, as Python does not support method overloading.

We will be looking at the case of adding to a specific index first.

Cases

The `add` method has 5 basic parts, only three of which involve actual thinking about how to code:

1. Check index to see if our index in bounds
 - If it is, crash the program.
2. Check to see if our array list has room to add a new item.
 - If there is no room, make some!
 - How we do this is covered in Section 5.6.5.
3. Shift all the existing items from `index` to the end of the list over one index to the right. This moves all the items already in the list to their new locations.
4. Store the item.
5. Increment the size.

Those last two steps are important but not complicated. We will go ahead and handle them now and put in comments for the other parts.

```

public void add(int index, E item) {
    // Check the index

    // do we have room?

    //shift over existing items

    theData[index] = item;
    size++;
}

def insert(self, index: int, item):
    # Check the index

    # do we have room?

    # shift over existing items

    self.theData[index] = item
    self.size += 1

```

Checking The Index

An optional step for pedagogy, but good practice. If the index is less than, we reject it. If the `index > size`, we reject it. The case of `index == size` is perfectly fine, but it feels weird, since you should have the rule “valid indexes are `0...array_size`” carved into your soul by this point. This is because the index `size` would be the next empty slot for use to put an item. Once we insert the item, we increment the size at the step of the method. After that, our rule about valid indexes becomes true again.

```

public void add(int index, E item) {
    // Check the index
    if(index < 0 || index > size) {
        throw new IndexOutOfBoundsException("Index "
            + index + " is out of bounds.");
    }

    // do we have room?

    //shift over existing items

    theData[index] = item;
    size++;
}

```

In python, we take the additional step of checking if the index is an `int`.

```

def insert(self, index: int, item):
    # Check the index

```

```

if not isinstance(index, int):
    raise IndexError(index + " is not an integer.")
if index < 0 or index > self.size:
    raise IndexError("Index " + str(index) +
        → " is out of range.")
# do we have room?

# shift over existing items

self.theData[index] = item
self.size += 1

```

Deciding to Reallocate

Our array is only so big; if our current `size` and `capacity` are the same, we don't have any more room. In this situation, we call `reallocate`, which doubles⁷ our capacity. We will solve this issue in Section 5.6.5 and handwave the implementation for now.

```

public void add(int index, E item) {
    // Check the index
    if(index < 0 || index > size) {
        throw new IndexOutOfBoundsException("Index "
            → +index+ " is out of bounds.");
    }

    // do we have room?
    if(size == capacity) {
        this.reallocate();
    }
    //shift over existing items

    theData[index] = item;
    size++;
}

```

In python, we take the additional step of checking if the index is an `int`.

```

def insert(self, index: int, item):
    # Check the index
    if not isinstance(index, int):
        raise IndexError(index + " is not an integer.")
    if index < 0 or index > self.size:
        raise IndexError("Index " + str(index) +
            → " is out of range.")
    # do we have room?
    if self.size == self.capacity:
        self.__reallocate()

```

⁷As we will see later, doubling is what we chose for our implementation, but other options exist.


```
# shift over existing items

self.theData[index] = item
self.size += 1
```

Shifting the Items

As mentioned previously, if `index == size`, we will be inserting the item we want to add into the next unused slot.

Reallocation Implementation

When we need to grow our arraylist, can't actually physically change the size of the array `theData`; you can't change the size of an array. So we cheat. We create a new array twice ⁸ the capacity of `theData`. We then copy everything over to the new array and then store the reference to that new array in `theData`, making it our new underlying array.

```
private void reallocate(){
    //doubles or 1.5x capacity
    //don't do +1 capacity
    capacity = 2 * capacity;
    E[] newData = (E[]) new Object[capacity];
    for(int i = 0; i < theData.length; i++) {
        newData[i] = theData[i];
    }
    theData = newData;
}
```

We want to double our capacity or at least increase it by 50%, rather than increasing it by a static number. Consider if we increase the capacity by one each time we reallocated. If we did that, we would have to reallocate every time we added a new item to the list. This would mean that every time we add an item to list, add becomes a linear time - $O(n)$ - operation.

Having empty slots might seem wasteful, but the advantage is that it takes constant time to add to the end of the arraylist. This is because we don't have to shift any existing elements around. It is a classic time/space trade-off.

Because reallocation is a *relatively* rare event compared to adding, we don't typically take that cost into account when analyzing an algorithm with a large number of `add` commands. This is because if we do have some capacity n , in order to trigger reallocation with a runtime of $O(n)$, we have to do n add operations first. We can then "spread out" the cost of the `reallocate` operation over our `add` operations.

⁸The one thing worth noting is that the real implementation of a list in python, `listobject.c`, uses a completely different pattern than doubling the capacity. This is more complicated than we need for this book; doubling is much simpler and accomplishes what we need.

Finished Code

```

public void add(int index, E item) {
    if(index < 0 || index > size) {
        throw new IndexOutOfBoundsException("Index " +
            ↪ index + " out of bounds.");
    }

    if(size == capacity) {
        this.reallocate(); // O(n) time...sometimes.
        ↪ Amortized over the cost of adding
    }

    for(int i = size - 1; i >= index; i--) { //If adding to
        ↪ the end... constant
        E temp = theData[i]; // Store the item from
        theData[i+1] = temp; // Move the item from
    }

    theData[index] = item;
    size++;
}

private void reallocate(){
    //doubles or 1.5x capacity
    //don't do +1 capacity
    capacity = 2 * capacity;

    E[] newData = (E[]) new Object[capacity];
    for(int i = 0; i < theData.length; i++) {
        newData[i] = theData[i];
    }

    theData = newData;
}

def insert(self, index: int, item):
    if not isinstance(index, int):
        raise IndexError(index + " is not an integer.")
    if index < 0 or index > self.size:
        raise IndexError("Index " + str(index) +
            ↪ " is out of range.")
    if self.size == self.capacity:
        self.__reallocate()
    for i in range(self.size - 1, index - 1, -1):
        temp = self.theData[i]
        self.theData[i+1] = temp
    self.theData[index] = item

```

```

        self.size += 1

def __reallocate(self):
    self.capacity = self.capacity * 2
    newData = [None] * self.capacity
    for index, item in enumerate(self.theData):
        newData[index] = item
    self.theData = newData

```

Adding to the End

As previously mentioned, adding to the end is an extremely common operation, so we will overload our `add` method. If our list is provided with only an `item`, as opposed to an `item` and an `index`, we will just add that `item` to the end. Since we already wrote a perfectly good `add` method already that we know works, we'll just have our new method call that one.

```

public boolean add(E item) {
    this.add(size, item); // size is the last valid index
    return true; // What?
}

```

Why are we returning `true` here? The short answer is practice and consistency with future data structures. The long answer is any `Collection` in Java has must have an `add` method and a `List` is type of `Collection`⁹.

`Collection` specifies that `add` must take in an `item` and return a `boolean`. A `true` signals the `add` is successful. A `false` signals that we could not add the `item`. For example, this might happen with a `Set` (Chapter 13)

On the other hand, our Adding at a specific index is unique to lists, and not part of collections, and will always work. Therefore, there's no need to return a `boolean`.

5.6.6 toString and __str__

Now that we supposedly have a method for adding items into the list, the next step is to test it. The easiest way to test it is by printing out the contents of the list. We'll do this in the laziest way possible.

In java, that would be invoking the `Arrays.toString` method, since directly turning an array into a string gives you representation of the memory location:

```

public String toString(){
    // return theData+""; // memory location

    return Arrays.toString(theData); // import the library
}

```

That said, implementing it ourselves gives us good practice handling a common fence-posting problem, i.e. we need to print n items separated by $n - 1$ commas.

⁹Our `MyArrayList` isn't technically a `Collection` since we did not implement the `List` interface, but I digress.

```

public String toString(){
    String output = "["+theData[0];
    for (int i = 1; i < size; i++) {
        output+= ", " + theData[i];
    }

    return output + "]";
}

def __str__(self): # second attempt
    output = "["
    #only include indexes from 0 to size-1
    for item in self.theData[:self.size]:
        output += str(item) + ","
    output = output[:-1] # remove the last comma
    return output + "]"

```

5.6.7 Get and Set

The `get` and `set` methods are fairly straightforward:

get - Given an `index`, retrieve the item stored at that `index`.

set - Given an `index`, replace the old item stored at that `index` with the provided item.

`set` has one additional quirk, we also want to return the old item we're replacing, just in case the programmer wants to do something with the old item. This would obviate the need for pairing a `get` and `set` call with each other if we want to replace the old item, but do something else with it.

For both `get` and `set`, we want to throw some kind of error if the provided `index` is out of bounds.

Java

Our `get` is fairly straightforward, but feel free to give more information with the error.

```

public E get(int index) {
    if(index < 0 || index >= size) {
        throw new IndexOutOfBoundsException("Index " +
            ↪ index + " out of bounds.");
    }
    return theData[index];
}

```

The same goes for our `set` method.

```

public E set(int index, E item) {
    if(index < 0 || index >= size) {

```

```

        throw new IndexOutOfBoundsException("Index " +
            ↪ index + " out of bounds.");
    }
    E oldItem = theData[index];
    theData[index] = item;

    return oldItem;
}

```

Python

Python supports negative indices.

We can take advantage of some of the method calls built into python to make our `myarraylist` support indexing.

```

def __getitem__(self, index):
    if index < 0:
        index = index % self.size # yes!
        # If you're confused, test modulo on
        # negative numbers in python.
    if index >= self.size:
        raise IndexError("Index " + str(index) +
            ↪ " is out of range.")
    return self.theData[index]

```

This method, as written, will return `None` if the user tries to access an index that is within in the bounds of the capacity but above the size. The same thing will happen if we use negative indices.

While this is fine for our pedagogical programming purposes, prudence posits proactive protection. That is to say, we should ask “how do we prevent our users from accidentally getting the wrong data when they should be getting an error.”

Below, we will add two index checks.

```

def __getitem__(self, index):
    if index < 0:
        index = index % self.size # yes!
        # If you're confused, test modulo on
        # negative numbers in python.
    if index >= self.size:
        raise IndexError("Index " + str(index) +
            ↪ " is out of range.")
    return self.theData[index]

```

5.6.8 Remove

The code for `remove` is almost identical in structure to `add`, but without a case for checking if there's room. Since we are removing, we don't have to worry about running out of room. We also make sure we save the item we are removing and return it, for the same reason we do for the `set` method.

- Check if `index` is valid.

- Save the item at `index` for later.
- Shift each item to the right of `index` over (indices greater than `index`) one to the left. This will overwrite what's stored at `index`, which is why we saved it.
- Decrement the size.
- Return the saved item.

A word of warning with `remove` operations on “real” implementations. Removing items from a list while you are iterating over it has the potential to get messy. Languages can sometimes even throw runtime exceptions to *prevent* you from doing it. See the problem in Section 5.9.1

5.7 Analysis

When reading through our analysis, please keep in mind that we made a number of pedagogical choices when writing our Array List.

We did this to make our code readable and to help gain an understanding of the mechanisms .

The Array List implementation in your language of choice probably has a huge number of optimizations, at the cost of readability and complexity. For example, at the time of writing, `listobject.c`, the source code for the Python list, is almost 3500 lines long [1].

Those caveats aside, let's talk about the four primary operations for Lists that have a cost: add, remove, get, and set.

5.7.1 Add/Remove

The runtime for add and

5.7.2 Get/Set

ArrayLists use the same memory formula discussed in Section 3.4.2 to find a specific index. This calculation, which is an addition and multiplication operation, takes the same amount of time no matter how big the ArrayList is. Thus the runtime is $\Theta(1)$

5.7.3 A Note on Storage

5.8 A Few More Useful Methods

5.8.1 Constructors

Java's `ArrayList` can optionally take in an integer as an argument. This will start the underlying array's length at that value, rather than the default of 10. This is useful if you know exactly how big your List will be. However, if you aren't removing any items when populating your list, consider using an array instead.

5.8.2 Manually Adjusting the Capacity

Java provides two methods for manually adjusting the `ArrayList` capacity. The method `ensureCapacity(n)` forces the `ArrayList` to grow to a capacity of `n` items, if it can't already. Conversely The `trimToSize()` shrinks the capacity to be equal to the current size. This is useful if we know the `ArrayList` won't get any larger than it currently is and want to eliminate the wasting memory with empty array slots.

Python will automatically optimize lists for you. Python will automatically resize the list to shrink it if necessary [1].

5.8.3 Adding Multiple Items in One Invocation

One common operation is to move or copy all the items from one list to another. In Java, we can use the `addAll()` method, which takes any Java collection as a parameter and all the items in that collection to the object.

```
List<Integer> a = new ArrayList<>();
List<Integer> b = new ArrayList<>();
for(int i = 0; i < 3; i++) {
    a.add(i);
}
for(int i = 3; i < 6; i++) {
    b.add(i);
}
a.addAll(b);
System.out.println(a); // 0 to 5 inclusive
System.out.println(b); // [3, 4, 5]
```

In Python, we can use the `extend()` method on anything that is iterable or use some clever slicing. However, I would always recommend using the method call over the slice, since a method invocation is always more readable.

```
a = [0, 1, 2]
b = [3, 4, 5]
c = a + b # creates a new list, which is not extend
a.extend(b) # adds all of b's items to a
a[len(a):] = b # does the same thing but unreadable.
```

A common beginner mistake in Python is to try to extend a list by calling `append` on the list like so.

```
a = [0, 1, 2]
b = [3, 4, 5]
a.append(b) # a is now [0, 1, 2, [3, 4, 5]]
```

This adds the entire list a single item in the list.

5.9 Exercises

5.9.1 Remove All Instances

Write a method called `removeAllInstances()` which takes in a `List` and item¹⁰. The method then proceeds to remove each item in the list that matches the given item. For example, if the method is passed the `List<Integer>` `[1, 4, 5, 6, 5, 5, 2]` and the `Integer` `5`, the method removes all 5's from the `List`. The `List` then becomes `[1, 4, 6, 2]`. It should return nothing, since the changes the `List` it was provided.¹¹

¹⁰In other words, the first parameter is a list of generics and the other input is a single item of the same type the list holds.

¹¹This one is extremely tricky, since removing an item shifts the indexes.

5.10 Source Code

5.10.1 Java

```
package arraylists;

// Change this up to be distinct from KW; been teaching so many
↪ years using their text that this is extremely close to what
↪ they do.
public class MyArrayList<E> {

    private int size; // how many items are in the list
    private int capacity; // how many items the underlying array
    ↪ can hold
    private E[] theData;

    public MyArrayList(){
        size = 0;
        capacity = 10;
        theData = (E[]) new Object[10];
    }

    public int size() { // O(1)
        return size;
    }

    public boolean isEmpty() {
        return (size == 0);
    }

    public boolean add(E item) {
        this.add(size, item);
        return true;
    }

    public void add(int index, E item) {
        if(index < 0 || index > size) {
            throw new IndexOutOfBoundsException("Index " +index+
            ↪ " is out of bounds.");
        }

        if(size == capacity) { // O(n) time...sometimes.
            ↪ Amortized over the cost of adding
            this.reallocate();
        }
    }
}
```

```

    for(int i = size - 1; i >= index; i--) { //If adding to
        ↪ the end... constant
        E temp = theData[i];
        theData[i+1] = temp;
    }

    theData[index] = item;
    size++;
}

private void reallocate(){
    //doubles or 1.5x capacity
    //don't do +1 capacity
    capacity = 2 * capacity;

    E[] newData = (E[]) new Object[capacity];
    for(int i = 0; i < theData.length; i++) {
        newData[i] = theData[i];
    }

    theData = newData;
}

public E remove(int index) {
    if(index < 0 || index >= size) {
        throw new
        ↪ IndexOutOfBoundsException("WE ALREADY WENT OVER THIS! IT'S OUT OF BOU
    }
    E item = theData[index];

    for(int i = index + 1; i < size; i++) { //O(n), unless
        ↪ we remove last item in the list
        theData[i-1] = theData[i];
    }

    size--;
    return item;
}

public E get(int index) {
    if(index < 0 || index >= size) {
        throw new
        ↪ IndexOutOfBoundsException("WE ALREADY WENT OVER THIS! IT'S OUT OF BOU
    }
    return theData[index];
}

```

```
public E set(int index, E item) {
    if(index < 0 || index >= size) {
        throw new
            ↳ IndexOutOfBoundsException("WE ALREADY DID THIS JOKE!");
    }
    E oldItem = theData[index];
    theData[index] = item;

    return oldItem;
}

public int indexOf(E item) {
    for (int i = 0; i < size; i++) {
        if(item.equals(theData[i])){
            return i;
        }
    }
    return -1;
}

public boolean contains(E item) {
    for (int i = 0; i < size; i++) {
        if(item.equals(theData[i])){
            return true;
        }
    }
    return false;
}

public String toString(){
    String output = "["+theData[0];
    for (int i = 1; i < size; i++) {
        output+= ", " + theData[i];
    }

    return output + "];"
}

public static void main(String[] args) {
    MyArrayList<Integer> list = new MyArrayList<Integer>();
    for(int i = 0 ; i < 5; i++){
        list.add(i);
        System.out.println(list);
    }
}
```

```
        list.remove(1);  
        System.out.println(list);  
        list.add(5);  
        System.out.println(list);  
    }  
}
```

5.10.2 Python

```

from doctest import OutputChecker

class MyArrayList(object):
    def __init__(self) -> None:
        self.size = 0
        self.capacity = 10
        self.theData = [None]*self.capacity

    def __len__(self):
        return self.size

    def insert(self, index: int, item):
        if not isinstance(index, int):
            raise IndexError(index + " is not an integer.")
        if index < 0 or index > self.size:
            raise IndexError("Index " + str(index) +
                               ↪ " is out of range.")
        if self.size == self.capacity:
            self.__reallocate()

        for i in range(self.size - 1, index - 1, -1):
            temp = self.theData[i]
            self.theData[i+1] = temp

        self.theData[index] = item
        self.size += 1

    def append(self, item):
        self.insert(self.size, item)

    def __reallocate(self):
        self.capacity = self.capacity * 2
        newData = [None] * self.capacity
        for index, item in enumerate(self.theData):
            newData[index] = item
        self.theData = newData

    def remove(self, index: int):
        if index < 0 or index >= self.size:
            raise IndexError("Index " + str(index) +
                               ↪ " is out of range.")

        item = self.theData[index]

        for index in range(index+1, self.size):
            self.theData[index - 1] = self.theData[index]

```

```

        self.size = self.size - 1
        return item

    """
    def __str__(self): # first attempt
        output = "["
        for item in self.theData:
            output += str(item) + ","
        output = output[:-1] # remove the last comma
        return output + "]"
    """

    def __str__(self): # second attempt
        output = "["
        #only include indexes from 0 to size-1
        for item in self.theData[:self.size]:
            output += str(item) + ","
        output = output[:-1] # remove the last comma
        return output + "]"

    # obviated by dunder method
    def get(self, index):
        if index < 0 or index >= self.size:
            raise IndexError("Index " + str(index) +
                               ↪ " is out of range.")
        return self.theData[index]

    # obviated by dunder method
    def set(self, index, item):
        if index < 0 or index >= self.size:
            raise IndexError("Index " + str(index) +
                               ↪ " is out of range.")
        oldItem = self.theData[index]
        self.theData[index] = item
        return oldItem

    def __getitem__(self, index):
        if index < 0:
            index = index % self.size # yes!
            # If you're confused, test modulo on
            # negative numbers in python.
        if index >= self.size:
            raise IndexError("Index " + str(index) +
                               ↪ " is out of range.")
        return self.theData[index]

    def __setitem__(self, index, item):
        if index < 0:
            index = index % self.size
        if index >= self.size:

```

```
        raise IndexError("Index " + str(index) +  
        ↪ " is out of range.")  
    oldItem = self.theData[index]  
    self.theData[index] = item  
    return oldItem  
  
l = MyArrayList()  
for i in range(12):  
    l.append(i)  
l.remove(2)  
print(l)
```


Chapter 6

Linked Lists

Linked lists , also referred to as reference based lists , are the second type of lists typically seen in applications . To be clear a linked list is a list. That means it could be used anywhere an array list can. So Why do we have two objects that are functionally equivalent , two collections that hold things in order, using indexes? The answer is will see, is because each list is good at the thing the other list is less efficient at.

Array based lists use contiguous blocks of memory, allocated all at once and when then capacity of the list is filled up. Utilizing an array makes these types of lists extremely efficient at retrieving an item from a specific index, but adding items anywhere but the end of the list incurs a $O(n)$ runtime.

Linked Lists can do all the things an Array List can, but the underlying structure is completely different. Each item in the list is stored in an Object called a *Node*. Nodes are created as items are added to list, rather than in advance. This means that are not contiguous, but Rather they are scattered throughout the computer's memory . So how in the world do we keep track of where we've stored all these items ? The solution resembles the scavenger hunt through the computer's memory. Each node Not only the memory location of the item that is being stored, but the memory location of the next node in the list . An example of this code can be found below¹:

```
// a snippet of the Node Class
// This will live inside the LinkedList class
private static class Node<E> {
    E item;
    Node<E> next;

    public Node(E item) {
        this.item = item;
    }
}
```

¹Why is this class private in Java `private`? An inner class (or private class) is a class that lives within another class. We use this for two reasons: Our nodes only exist to build the linked list, so they don't need to have their own class. The Second reason is What about `static class`? This means that we can create nodes without having to make a Linked List first!

Upon first glance, this code may be very confusing. Each node class contains a reference to a node inside of it. This may give the impression that nodes situated one inside another, like one of those Russian nesting matryoshka dolls. However, keep in mind what the node is actually storing is not other objects, but instead memory locations of where to find them. This means that our linked list is more akin to a scavenger hunt where each objective in the hunt contains the instructions on how to find the next objective.

In other words, the item is the data that is being stored (well actually the memory location, don't forget that), and next refers to the memory location of the next index in the list. Crash course is an excellent video demonstrating this which you can find [here](#):

6.1 Connecting Nodes into a list.

we keep track of only the first and last item in the list, referred to as the head and the tail.

I will be presenting the directions to building a fully functional singly-linked list and doubly-linked list. These directions will differ from the mechanics of how your programming language of choice implements them, but have the same time complexity for their operations. My implementation is constructed with the goal of making the code easy to understand and the decisions that need to be for adding and removing reflect each other. Finally, my code aims to minimize the number of null-pointer exceptions and their ilk a programmer would make.

The full implementations can be found at the end of the Chapter.

6.2 Building a Singly LinkedList

We open up our linked list with a class declaration. If our language uses generics, we specify it there. I'll be choosing not to inherit from the built-in list so we can focus solely on our own code and no external distractions.

In Java, our code begins like this.

```
public class LinkedList<E> { }
```

In Python

```
class LinkedList(object):
    pass
```

6.2.1 The Node

We want the Node class to be a private/internal class, so that the Node we write for a singly linked list and doubly linked list won't get mixed up in our coding environments. This also applies for other data structures that will be using nodes.

```
public class LinkedList<E> {
    private static class Node<E>{
        E item;
```

```

        Node<E> next;

        public Node(E item){
            this.item = item;
        }
    }

}

class LinkedList(object):
    class Node(object):
        def __init__(self, item) -> None:
            self.item = item
            self.next = None

    pass

```

In the Node private/internal/inner class (and only there), the **this** or **self** refers to the **node** rather than the linked list.

6.2.2 Instance Variables and Constructor

Our linked list `LinkedList` only needs a few Instance variables in order to Function. We need to keep track of the size; Without it we would have no idea what the valid indices are in the list. We need to keep track of the head so we know where to start our scavenger hunt for any particular index or item we're looking for. Finally we'll keep track of the tail. While keeping track of the tail isn't strictly necessary, keeping track of it means that will be able to add an item to the end of the linked list very efficiently ($O(1)$).

The only job of the constructor is to initialize everything to either zero or null.

Finally, it's probably a good idea to go ahead and write getter method for the size of the list.

```

public class LinkedList<E> {
    private Node<E> head;
    private Node<E> tail;
    private int size;

    public int size(){
        return this.size;
    }
}

```

6.2.3 Adding

Our Linked list has two add methods, just like the array list. The first only takes in an item and adds that item to the end of the linked list. It will do this

by calling our second method which takes in an index and an item and inserts that item at that index.²

Let's take a look at our first `add`³ method:

```
public boolean add(E item){
    this.add(this.size, item);
    return true;
}

def add(self, item):
    self.add(self.size, item)
    return True
```

Simple enough! But what about that second `add` method? When we do any kind of operation on a linked list, we need to think about how instance variables in a linked list will be altered. Fortunately, we only have three instance variables: `size`, `head`, and `tail`. When adding to a linked list, the size will always be altered as long as the index is valid. Our list's `head` will only be altered when we add an item to the beginning of the list and our `tail` will only be altered when we add to the end of the list. If the list is empty, then the node for that added item becomes both the head and the tail.

We can simplify our job by breaking the `add` method into five separate cases:

1. The index that we want to add to is out of bounds.
2. We are adding an item to a list that is completely empty. This is going to change the head and tail the list from `null` to something.
3. We are adding an item to index 0, which is going to change the head of the list.
4. We are going to add an item to the end of the list, which means that we are going to change what the tail is.
5. We are adding to some other index in the list, which means that we don't have to bother changing the head or the tail.

Let's start with the first case.

Checking the index is in or out of bounds

Since we passed the check above, we should take a moment before we add an item to address things that need to happen no matter what for Every add condition. Specifically, we need to have a node to hold the item we are adding, and we want to go ahead and increment the size of the list At the end of the method so we don't forget about it.

I will be calling the node that holds the item we are inserting into the list `adding`. As calling it node would be extremely confusing, since we are dealing with so many nodes and other variables like `next` that are also four letters long.

Here's what our changes look like.

²If this sounds familiar, it's because this is precisely what the `add` method in the `arraylist` does. Shocking, right?

³As with the `arraylist`, the `add` method returns a boolean to signify that we were successfully able to add it to the list. This will always be true, but we do this because Java expects this for collections, as explained in `arraylists`

```

public void add(int index, E item) {
    // Scenario 1: index is out of bound
    if(index < 0 || index > size ) { //0(1)
        throw new IndexOutOfBoundsException(index +
            ↪ " is out of bounds");
    }

    Node<E> adding = new Node<E>(item);
    /* the rest of our code*/
    size++;
}

```

Adding to an Empty List

Now let's consider Adding to an empty list. An empty list means the size is 0. If that's the case, we are going to make Adding the new head of the list, As well as the new tail. Just like if you are the only person in line at checkout you are both the first person and the last person in line , this node will also be the first node and the last node in the list , which is why it Will be both the head and tail of the list (at least until we add another item).

```

// Scenario 2: adding to an initially empty list
if(size == 0) {
    head = adding;
    tail = adding;
}

```

Adding an item to the beginning of the list

Adding an item to the beginning of the list means that the node containing it becomes the new head of the list. We do this by attaching Adding to the list, Then informing the list adding is the new head .We do this by setting adding's .next Two point to the current head of the list, then setting The list had to be the node we added.

```

// Scenario 3: adding a new head
else if(index == 0) {//(1)
    adding.next = head;
    head = adding;
}

```

Here, we introduce one of the most important rules we need to follow when working with a linked list : when we are adding an item to the linked list attached the list first , then update the rest of the list to accommodate the new reality.

Failing to do this can have catastrophic results. Consider below Where we set Adding as new head first

```

// Mistakes were made
else if(index == 0) {
    head = adding; // oops
    adding.next = head;
}

```

Note that the number of operations we do here is always the same no matter how big the list is! This means that adding to the head is a constant time operation.

Adding an item to the end of the list

```
// Scenario 4: adding a new tail
else if(index == size ){
    tail.next = adding;
    tail = adding;
}
```

Sidebar: Getting a Node at a Specific Index

```
private Node<E> getNode(int index){ //O(n)
    Node<E> current = head;
    for (int i = 0; i < index; i++) {
        current = current.next;
    }
    return current;
}
```

Inserting an item into a specific index

```
// Scenario 5: everything else
else {
    Node<E> before = getNode(index -1); //O(n)
    adding.next = before.next;
    before.next = adding;
}
```

The end result

```
public void add(int index, E item) {
    // Scenario 1: index is out of bound
    if(index < 0 || index > size ) { //O(1)
        throw new
            ↪ IndexOutOfBoundsException("Not a valid index :(");
    }

    Node<E> adding = new Node<E>(item);

    // Scenario 2: adding to an initially empty list
    if(size == 0) {
        head = adding;
        tail = adding;
    }
    // Scenario 3: adding a new head
    else if(index == 0) { // O(1)
        adding.next = head;
        head = adding;
    }
}
```

```

    }
    // Scenario 4: adding a new tail
    else if(index == size ){
        tail.next = adding;
        tail = adding;
    }
    // Scenario 5: everything else
    else {
        Node<E> before = getNode(index -1); //O(n)
        adding.next = before.next;
        before.next = adding;
    }

    size++;
}

```

6.3 Get and Set

Before we got onto our remove method, let's take a look at `get` and `set` very briefly.

6.3.1 Get

Just like with an `ArrayList`, the `get` method returns the item and the specified index. However, since we can't go directly to a specific index like we can with an array or `ArrayList`, we need to iterate thru the `.next` links until we get to the appropriate node. Fortunately, we can just use our `getNode` function that we created when we were writing `add`.

```

public E get(int index) {
    if(index < 0 || index >= size ) {
        throw new IndexOutOfBoundsException(index +
            ↪ " is out of bounds");
    }
    return getNode(index).item;
}

```

6.3.2 Set

`Set` operates very similar to `get`. Remember, `set` also returns the item that is already at the specified index, essentially replacing it.

```

public E set(int index, E item) {
    if(index < 0 || index >= size ) { //O(1)
        throw new IndexOutOfBoundsException(index +
            ↪ " is out of bounds");
    }
    Node<E> node = getNode(index);
    E toReturn = node.item;
}

```

```

        node.item = item;

    return toReturn;
}

```

6.4 Remove

6.5 Analysis

Array lists and linked lists are both extremely powerful objects that fulfill the same purpose, but in radically different ways.

6.5.1 Some Algorithms Play Better

Linked Lists are more efficient for algorithms that require a list to be split, such as Merge sort, or when items are constantly being moved from the front to the back. Linked Lists are also extremely efficient with certain card-like operations, like cutting a deck (eg moving a contiguous group of items starting at index zero of a list to the rear of the list)

However, if your algorithm constantly needs to seek the midpoints between two indices in the list, Arraylists are extremely efficient whilst linked lists suffer with their operations.

6.6 Potential Project/Practice/Labs

6.7 Source Code

```

from typing import Generic, TypeVar

E = TypeVar('E')

class LinkedList(Generic[E]):

    class Node(Generic[E]):
        def __init__(self, item: E) -> None:
            self.item = item
            self.next = None

    def __init__(self) -> None:
        self.head = None
        self.tail = None
        self.size = 0

    def __len__(self) -> int:
        return self.size

    def getNode(self, index: int) -> Node:

```



```

        current = self.head
        for i in range(index):
            current = current.next
        return current

def add(self, item: E) -> bool:
    self.add(self.size, item)
    return True

def add(self, index: int, item: E) -> None:
    if(index < 0 or index > self.size):
        raise IndexError("Invalid add at index " + str(index)
            + " with item" + str(item) + ".")

    adding = self.Node(item)
    if(self.size == 0):
        self.head = adding
        self.tail = adding
    elif(index == 0):
        adding.next = self.head
        self.head = adding
    elif(index == self.size):
        self.tail.next = adding
        self.tail = adding
    else:
        before = self.getNode(index - 1)
        adding.next = before.next
        before.next = adding

    self.size += 1

def remove(self, index: int) -> E:
    if(index < 0 or index >= self.size):
        raise Exception("Invalid remove at index " +
            str(index) + ".")

    toReturn = None
    if self.size == 1:
        toReturn = self.head.item
        self.head = None
        self.tail = None
    elif index == 0:
        toReturn = self.head.item
        self.head = self.head.next
    elif index == self.size - 1:
        toReturn = self.tail.item
        self.tail = self.getNode(index - 1)
        self.tail.next = None
    else:
        before = self.getNode(index - 1)

```

```
        toReturn = before.next.item
        before.next = before.next.next
    self.size -= 1
    return toReturn

def get(self, index: int) -> E:
    return self.getNode(index).item

def set(self, index: int, item: E) -> E:
    node = self.getNode(index)
    oldItem = node.item
    node.item = item
    return oldItem

def __str__(self) -> str:
    output = ""
    current = self.head
    while current != None:
        output += str(current.item) + "->"
        current = current.next
    return output[:-2]

l = LinkedList()
l.add(3)
l.add(5)
l.add(142)
```

Chapter 7

Stacks

Our next data structure is the Stack. The stack may seem unnecessary as a data structure after we introduce its features. After all, can't a list do all the things that a stack can do and more?

Working with the limited operations of a allows us to approach problems with a different mindset.

7.1 Stack Operations

The stack operations are limited and simple.

Push Put an item on the top of the stack.

Pop Remove the item from the top of the stack and return it. The item that was underneath the top of the stack becomes the new top.

Peek Return the top of the stack, without removing it.

That's it. That's all there is. It is refreshingly simple. There will usually be additional functions, such as one to check if the stack is empty or a function to get the number of items stored in the stack, but **push**, **pop**, and **peek** are the important ones.

7.2 Building a Stack

We will be building a stack as a reference-based structure in this book. This is so we can get a bit more practice with manipulating nodes.

7.3 Built-in Stacks

Python has no separate built-in stack. Rather, we instead use a `list`. Rather, it uses the `List` that we are already familiar with to emulate a stack¹ and operates on the last (right-most) index of the list.

¹And the `Queue`, as we will see in Chapter 8

If you want to use a Python list as a stack, merely restrict yourself to using the `append(item)` function in place of `push`. Python lists have a `pop` method; when called without any argument², it removes and returns the last element in the list.

Use `stackname[-1]` to peek at the top of the stack.

7.4 Solving Problems with A Stack

7.5 Mazes - Stacks and Backtracking

If you haven't ever done a hedge maze, you should try it out. They are pretty fun in my opinion and certainly doing at least once. That said, I would venture most people playing in a maze of some sort meander through with a vague strategy, picking a direction they hope will get them closer to the goal.

Let me teach you two such strategies for when you get stuck in a maze. The first strategy is the “hand on wall” rule or “right hand” rule. It requires no preparation and works on almost every maze. Simply take your right hand and lay it upon the wall of the corridor you are in. Move forward and when you come to a turn, travel so that you never lift your hand off the wall. So long as the entrance and exit are on the same wall (which they almost certainly are), you'll eventually make your way out.

The second strategy is backtracking³ and works on any maze you are likely to encounter.⁴

Restricting our operations in a maze actually makes solving the problem *easier* by reducing the complexity.

For this section, we will assume that mazes are arranged in a grid, rather than some funky hexagonal pattern.

7.6 Paren

A classic stack problem is to write a program that checks to see if a given string has balanced parenthesis. Specifically, you encounter this problem in three places: a data structures class like this, an interview question, or Computer Automata class⁵. The question we're trying to answer is something like “Does the string `((A + f(x[0])) + B` have balanced parentheses. We humans can easily take a look and say no, `((A + f(x[0])) + B` doesn't balanced parentheses; it's missing a closing parenthesis. But how did we do that? Codifying that is how we solve this problem.

Now if it was a matter counting the number of opening and closing parenthesis, this would be an easy problem. But in asking if the parenthesis are balanced, we're essentially asking if they match in a way that makes mathematical sense:

²When provided an index, `pop` removes and returns the item at that index. Python uses `pop` to remove at an index, whereas `remove` is used to remove and return the first occurrence a specified item.

³Technically this is going to look a lot like Depth First Search, but this is a very specific variation of it.

⁴The exception is mazes that change their configuration while you are in them.

⁵This is used to show the limits of Discrete Finite Automata/Regular Languages and introduce Stack Machines/Context Free Grammars

everything is nested correctly; nothing closed before it opens. Simply counting the correct number of opening and closing parenthesis would fail on `a)(` and `fx)()`.

Instead, we can use a specific tool to handle this problem. If you guessed it is the stack, excellent work. You must have caught on to the numerous hints, such as this being in the chapter about stacks, or the starting sentence talking about how this is a classic stack problem.

We parse thru the string and skip anything not a parenthesis or bracket or the like. When we see an open parenthesis/bracket, we push it onto the stack. When we see a closing brace, we pop from the stack and compare. If we have a match, no issues. But if the type of brace or bracket or parenthesis doesn't match or there was nothing to pop off, return false.

`content...`

Chapter 8

Queues

A Queue (pronounced by saying the first letter and ignoring all the others) is a data structure which emulates the real world functionality of standing in a line (or queue, for those from Commonwealth nations). In a Queue, items are processed in the order they are inserted into the Queue. So if Alice enters the Queue, followed by Bob, followed by Carla, Alice would be the first to leave the Queue, then Bob, and then Carla.

The use cases for Queues are fairly obvious

8.1 Linked Based Implementation

8.2 Array Based Implementation

We could use

Part III

Recursion

Chapter 9

Recursion

9.1 Introduction

9.2 Recursive Mathematics

9.2.1 Fibonacci

As it turns out, while this technically works...it's pretty terrible. In short, using recursion, I managed to accidentally¹ write an $O(2^n)$, or exponential time, algorithm. This is very bad. This means increasing n by one *doubles* the runtime of our algorithm!

This is because to solving the current

9.3 Printing Recursively

Some of the upcoming examples of the things we are about to see should not be actually used and serve only as examples, like our `printThis` function.

9.4 Recursive Linear Search

9.5 Binary Search

9.5.1 Runtime Analysis

How to not be scared of logarithms

You may have learned that logarithms are the inverse operation to exponentiation. This is an utterly useless definition when programming.

A more way of thinking about logarithms is "how many times can I recursively split something?" For example, $\log_b x$ asks "how many times can I recursively split my x items into b separate piles?"

A more concrete example: $\log_2 16 = 4$, not because $2^4 = 16$, but because a pile of 16 items can be split in half into two piles of 8, each pile of 8 can be split

¹All right, I did this totally on purpose.

in half into two piles of 4, the 4's can be split into 2's, the 2's into 1's — four splits total:

<picture>

In algorithm analysis, $\log n$ in the time complexity is used to indicate that the search space gets split in half. In the Binary Search algorithm above, we split the our search space in half each step of the way. We start out looking at the middle item and then decide to look at all the items below or all the items above. This reduces the number of items to search among from n to $\frac{n}{2}$. From there we perform the same choices and reduce that $\frac{n}{2}$ to $\frac{n}{4}$, then from $\frac{n}{4}$ to $\frac{n}{8}$ and so on.

Back to it.

9.6 Recursive Backtracking

Recursion really comes in handy when we are trying to solve complex puzzles. One of the most famous examples of this is using


The Recursive Backtracking Algorithm

```
boolean solve(board, pos){
    if( pos is such that there is nothing left to solve){
        return true;
    }

    for each possible choice {
        if(valid(choice)){
            mark board at pos with choice;
            if(solve(board, pos + 1) == true){
                return true;
            }
            unmark board at pos if needed, as choice
            ↪ was invalid
        }
    }
    clear any choices entered at pos on board, if needed;
    return false; // backtrack
}
```

9.6.1 Mazes Again

9.6.2 The Eight Queens Puzzle

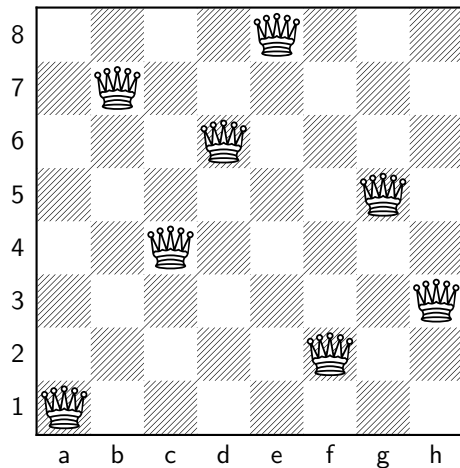

Brute Force Solution

A brute force algorithm means we will be checking every single possible state to find a solution. In this case, a brute force solution for the Eight Queens Puzzle would every possible placement of eight queens on a chessboard, such as these two:

<Chess notation here>

There are a total of $\binom{64}{8} = 4426165368$ possible ways to place 8 queens on a chessboard with 64 spaces.

Recursive Solution Outline

```
public static boolean solve(int[][] board, int col){

    if( col == 8){
        return true;
    }

    for(int row = 0; row < 8; row++){
        if(valid(choice)){
            mark board at pos with choice;
            if(solve(board, pos + 1) == true){
                return true;
            }
            unmark board at pos if needed, as choice
            ↪ was invalid
        }
    }
    clear any choices entered at pos on board, if needed;
```

```
        return false; // backtrack  
    }
```

A Place Holder For Validity

Performing the Recursion

Checking just One condition

Checking all the Conditions

9.6.3 Additional Problems left to the Reader

Knight's Tour

Sudoku

9.7 Recursive Combinations

9.8 Recursion and Puzzles

9.9 Recursion and Art

9.10 Recursion and Nature

Chapter 10

Trees

Our next major data structure is trees. Specifically, we will be looking at binary search trees.

Trees are an excellent data structure for storing things since they implement all the operations we care about for collections in logarithmic time¹

However, trees are not without limitations. Trees will only work with data that can be stored hierarchically or in an order.

10.1 The Parts of a Tree

The first thing we need to do when introducing trees is define a vocabulary.

Much like the linked list, a tree is made of nodes. However, unlike a linked list, nodes in a tree are not arranged in a line. Instead, they are arranged in a hierarchy.

Each node sits above multiple other nodes, with the nodes below it being referred to as their children or child nodes. The node connecting all these children is called the parent.

<A picture of one node, Represented by a circle with four arrows coming out below it. Each arrow points to yet another node. The Node with the arrows coming out of it is the parent, and the nodes below it are the children >

This relationship can be extended Ad infinitum as we can see with the picture below

<Picture with nodes labeled>

However anything above grandchild and grandparent just becomes tedious, so we tend to Generalize this relationship to ancestors and descendants. A key point here is to remember that while we are borrowing terms from the family tree, nodes will only have one parent. Each node can have multiple children, however.

We refer to the links connect each of the nodes as branches or links or edges. This tends to be a matter of personal preference.

¹Specifically, Trees implement everything in average case logarithmic time and worst case linear time, but if we do a bit of extra work and make it a self balancing binary tree (which will seem much later in this chapter) we can make this tree worst case logarithmic for all operations

Finally, we have one special node that sits above all the other nodes. This node is the root and it is analogous to the head of a linked list. All of our operations will start at the root of the tree².

Remember, programmers are stereotypically outdoors of averse, so they may have forgotten what a real tree looks like. Thus, we'll see that the root of the tree is at the top of the tree and our leaves are at the bottom⁴.

10.1.1 Where the Recursion comes in

There is a reason we learned recursion before we introduce trees. Trees are the exemplar recursive data structure.

Each tree has a root and that root has children. If we view each of those children as the root of their own subtree, this can make our algorithms for adding, removing, and searching extremely easy to write.

<picture Of tree, the recursive subtrees are dash circled.>

<Picture of the left subtree, with its trees circled>

10.2 Binary Search Trees

A diagram of a binary search tree. It is made up of nodes, represented by circles, and edges (also called links or branches), represented by arrows.

5

10.3 Building a Binary Search Tree

10.3.1 The Code Outline

We use the `Comparable` class in Java to require that all objects stored in the tree have a **total ordering**⁶. In practice, this means that anything `Comparable` can be sorted.

Python, of course, doesn't need these restrictions.

```
public class BinaryTree<E> extends Comparable<E> {
}
```

Much like our Linked List, we don't need much in the way of instance variables. We'll create a `root` to keep track of the starting place for our tree and size to keep track of how many items we have stored.

Finally, we will also create our inner `Node` class for the Tree. It needs to hold the item and the locations of the left and right children. We'll also go ahead and add a constructor and a method for printing out the item in the node (`toString` in Java and `__str__` in Python).

²Remember, programmers are stereotypically outdoors of averse, so they may have forgotten what a real tree looks like. Thus, we'll see that the root of the tree is at the top of the tree and our leaves are at the bottom³.

⁴Or maybe it's some weird hydroponic zero-G kind of thing.

⁵An aside about array based implementations.

⁶The formal definition is as follows


```

public class BinaryTree<E extends Comparable<E>> {
    private Node<E> root;
    private int size;

    public BinaryTree() {
        this.root = null;
    }

    /* Other code will go here.*/

    private static class Node<E extends
↪ Comparable<E>> {
        private E item;
        private Node<E> left; // left child
        private Node<E> right; // right child
        public Node(E item) {
            this.item = item;
        }
        public String toString() {
            return item.toString();
        }
    }
}

```

10.3.2 Add

All of our operations in our `BinaryTree` will be implemented recursively.

10.3.3 Contains

10.3.4 Delete

Chapter 11

Heaps

11.1 Priority Queues

11.2 Removing From other locations

Chapter 12

Sorting

Now that we have a handle on sorting =,

12.1 Quadratic-Time Algorithms

12.1.1 Bubble Sort

12.1.2 Selection Sort

Unlike Bubble Sort, Selection Sort has an actual use case. While the number of comparisons is always $O(n^2)$, the number of exchanges is $O(n)$. That means that we are doing only a single swap for every item we have to sort.

In other words, sorting on a computer assumes that comparisons are more expensive operation, but if that actual exchange of items is what is expensive, you should definitely consider Selection Sort. This could be the case if we are moving

12.1.3 Insertion Sort

12.2 Log-Linear Sorting Algorithms

The most commonly used sorting algorithms take $O(n \lg(n))$ time. This is the hard limit on runtime

12.2.1 Tree Sort

The tree sort is the simplest algorithm to we will cover. Performing Tree sort is a matter of three simple steps

1. Create a tree.
2. Load the items you want to sort into the tree.
3. Perform an inorder traversal of the tree.

The performance of this algorithm depends completely on the type of tree we create for this algorithm. Using a self-balancing binary search tree, adding

n items to the tree takes $O(n \lg(n))$ and an in order traversal takes $O(n)$ steps, for a grand total of $O(n)$ runtime. Using a binary search tree that does not self balance means that there is a worst case scenario of $O(n^2)$ for adding all the n items.

Using a tree also means we use extra space since all the data has to be moved into a tree, using $O(n)$ space.

12.2.2 Heap Sort

You might expect that heapsort deserves the same treatment as treesort. After all, a heap has the same structure as a tree and both are constructed to perform operations in $\log n$ time.

12.2.3 Heapify

12.2.4 Quick Sort

12.2.5 Merge Sort

12.3 Unique Sorting Algorithms

12.3.1 Shell Sort

The time complexity of Shell Sort is still an open problem.

12.3.2 Radix Sort

all of our prior algorithms relied on sorting items by comparing them with each other; Radix sort is unique in that no comparisons occur.

12.4 State of the Art Sorting Algorithms

12.4.1 Tim Sort

12.4.2 Quick Sort

12.5 But What if We Add More Computers: Parallelization and Distributed Algorithms

Parallel sorting algorithms are designed to be executed on a single computer with multiple processors or cores, while distributed sorting algorithms are designed to be executed on a network of computers working together. Both types of algorithms can be used to significantly improve the performance of sorting for large data sets, especially when the data does not fit in the memory of a single computer.

There are many different parallel and distributed sorting algorithms, each with its own characteristics and trade-offs. Some common techniques used in these algorithms include:

Data partitioning: Splitting the data into smaller chunks that can be sorted independently and then merged back together. Load balancing: Ensuring that

the work is distributed evenly among the available processors or computers. Communication: Allowing the processors or computers to communicate and exchange data during the sorting process.

Some examples of parallel and distributed sorting algorithms include:

Parallel merge sort: A parallel version of the merge sort algorithm that divides the data into smaller chunks and sorts them in parallel, then merges the sorted chunks back together. MapReduce: A programming model for distributed computing that is often used for sorting large data sets in a distributed environment, such as on a cluster of computers. Bitonic sort: A parallel sorting algorithm that uses a recursive divide-and-conquer approach to sort the data using a network of processors.

There are many other parallel and distributed sorting algorithms as well, each with their own specific characteristics and trade-offs. If you are interested in learning more about these algorithms, you may want to consider reading more about parallel and distributed computing, as well as specific techniques such as data partitioning, load balancing, and communication.

Parallel VS Distributed

12.6 Further Reading

12.6.1 Pedagogical Sorting Algorithms

Bogo Sort

Sleep Sort

Stooge Sort

This is primarily used as a means of testing students on using the **Master Theorem** for calculating the time complexity for algorithms.

Part IV

Hashing

Chapter 13

Sets

Sets programmed implementations of mathematical sets

13.1 Operations

We will use Venn diagrams to graphically demonstrate operates with two sets

13.1.1 Adding an item to a Set

Adding items to a set is fairly straightforward.

As we will see, adding to a set can be either $O(1)$ or $O(\log n)$ time, depending on the implementation

13.1.2 Removing an item to a Set

13.1.3 Union

In Java, this is the `addAll()` method.

13.1.4 Intersection

13.1.5 Set Difference

13.1.6 Subset

13.2 Operation Analysis

Most sets are implemented using a Hash Table.

13.2.1 TreeSet Vs HashSet Vs Linked Hash Set

13.3 Sets and Problem Solving

Sets are super efficient checklists.

13.3.1 Checking for Uniqueness or Finding Duplicates

Chapter 14

Maps

14.1 What is a Map

14.2 Functions

14.3 Costs

14.3.1 Tree-Based Map

14.3.2 Hash Table Map

Chapter 15

Hash Tables

Our goal here is to do what seems impossible: achieve $O(1)$ lookup, insertion, and deletion of items in a collection. Fortunately, it is possible, albeit with some sacrifices:

- In order to achieve the "ultimate" time efficiency, we need to sacrifice any semblance of memory efficiency. We're still dealing with $O(n)$ space complexity, but realistically expect 33% to 50% of the space to be spent in sacrifice of our goal.
- The default way of building a HashMap will mean that we have no control over how items are stored in, meaning if we require items to be sorted or we need to keep track of any semblance of order for the inserted data, look to another structure.

15.1 Creating a Hash Function

Chapter 16

Map Reduce

16.1 Map

The `map()` operation¹ is a powerful function that may require us to think differently about the way we have approached programming so far.

The map operation takes in 2 arguments, a collection and a function to apply to every item in the collection

When we are writing functions , we are creating new verbs for our programming language to use . These verbs take in arguments, nouns that we may have declared or defined ourselves. But one thing that we May not have done yet is passing a function as an argument to another function.

This is not an uncommon operation in mathematics Example listed below

The semantics of this in every programming language is different , but the concept is the same

Why introduces here? Because a lot of common operations that can be done with map reduce involve using hash tables

¹It is mildly confusing that there is a `map` data structure and a `map()` operation, so I will be marking the `map()` operation with a function invocation.

Part V

Relationships

Chapter 17

Graphs

In some ways, Graphs are the most important data structure. Graphs represent and model relationships, and humans are defined by relationships. The archetypical examples of graphs used to be maps and the distances between landmarks or looking for the shortest path.

With the advent of social media, we can talk about graphs with a few examples that might be easier to intuit.

17.1 Introduction and History

17.2 Qualities of a Graph

The physical layout of a graph doesn't actually matter¹

17.2.1 Vertices

- Vertices must be unique.

17.2.2 Edges

Undirected Edges

Directed Edges

Weighted Edges

17.3 Special Graphs and Graph Properties

17.3.1 Planar Graphs

Graphs that are planar can have their vertices and edges laid out in such a way that no two edges will cross.

¹Some properties, such as whether a graph is *planar* or *bipartite* effectively care if a graph can be physically laid out in a certain way.



Figure 17.1: The wings of a dragonfly. Credit: Joi Ito (CC BY 2.0)

17.3.2 Bipartite Graphs

17.3.3 Directed Acyclic Graphs

17.4 Building a Graph

17.4.1 Adjacency List

17.4.2 Adjacency Matrix

Matrix multiplication and GPU Abuse

17.5 Graph Libraries

17.5.1 Java - JUNG

17.5.2 Python - networkx

There is only one realistic choice for using graphs in Python. The package `networkx` is extremely powerful, extremely versatile, and actively maintained.

17.6 Graphs, Humans, and Networks

17.6.1 The Small World

The Milgram Experiment

The Less-Known Milgram Experiment

17.6.2 Scale Free Graphs

17.7 Graphs in Art and Nature - Voronoi Tessellation

Chapter 18

Graph Algorithms

18.1 Searching and Traversing

18.1.1 Breadth First Search

18.1.2 Depth First Search

18.2 Shortest Path

18.2.1 Dijkstra's Algorithm

Improving The Algorithm

Failure Cases

18.2.2 Bellman-Ford

18.3 Topological Sorting

18.3.1 Khan's Algorithm

18.4 Minimum Spanning Trees

18.4.1 Kruskal's Algorithm

18.4.2 Prim's Algorithm

End of book.

Bibliography

- [1] DEVS, P. listobject.c.