

```
In [24]: # The autoreload extension will automatically load in new code as you edit files
# so you don't need to restart the kernel every time
%load_ext autoreload
%autoreload 2

import numpy as np
from P1_astar import AStar
from P2_rrt import *
from P3_traj_planning import compute_smoothed_traj, modify_traj_with_limits, SmoothTrajectory
import matplotlib.pyplot as plt
from HW1.P1_differential_flatness import *
from HW1.P2_pose_stabilization import *
from HW1.P3_trajectory_tracking import *
from utils import generate_planning_problem
from HW1.utils import simulate_car_dyn

plt.rcParams['figure.figsize'] = [14, 14] # Change default figure size
```

The autoreload extension is already loaded. To reload it, use:

```
%reload_ext autoreload
```

Generate workspace, start and goal positions

```
In [25]: width = 100
height = 100
num_obs = 25
min_size = 5
max_size = 30

occupancy, x_init, x_goal = generate_planning_problem(width, height, num_obs, min_size, max_size)
```

Solve A* planning problem

```
In [26]: astar = AStar((0, 0), (width, height), x_init, x_goal, occupancy)
if not astar.solve():
    print("No path found")
```

Smooth Trajectory Generation

Trajectory parameters

(Try changing these and see what happens)

```
In [27]: v_des = 0.3 # Nominal velocity
alpha = 0.8 # Smoothness parameter
dt = 0.05
k_spline = 3
```


Generate smoothed trajectory

```
In [28]: t_smoothed, traj_smoothed = compute_smoothed_traj(astar.path, v_des, k_spline,
```

```

fig = plt.figure()
astar.plot_path(fig.number)
def plot_traj_smoothed(traj_smoothed):
    plt.plot(traj_smoothed[:,0], traj_smoothed[:,1], color="red", linewidth=2,
    plot_traj_smoothed(traj_smoothed)
plt.legend(loc='upper center', bbox_to_anchor=(0.5, -0.03), fancybox=True, ncol
plt.show()

```

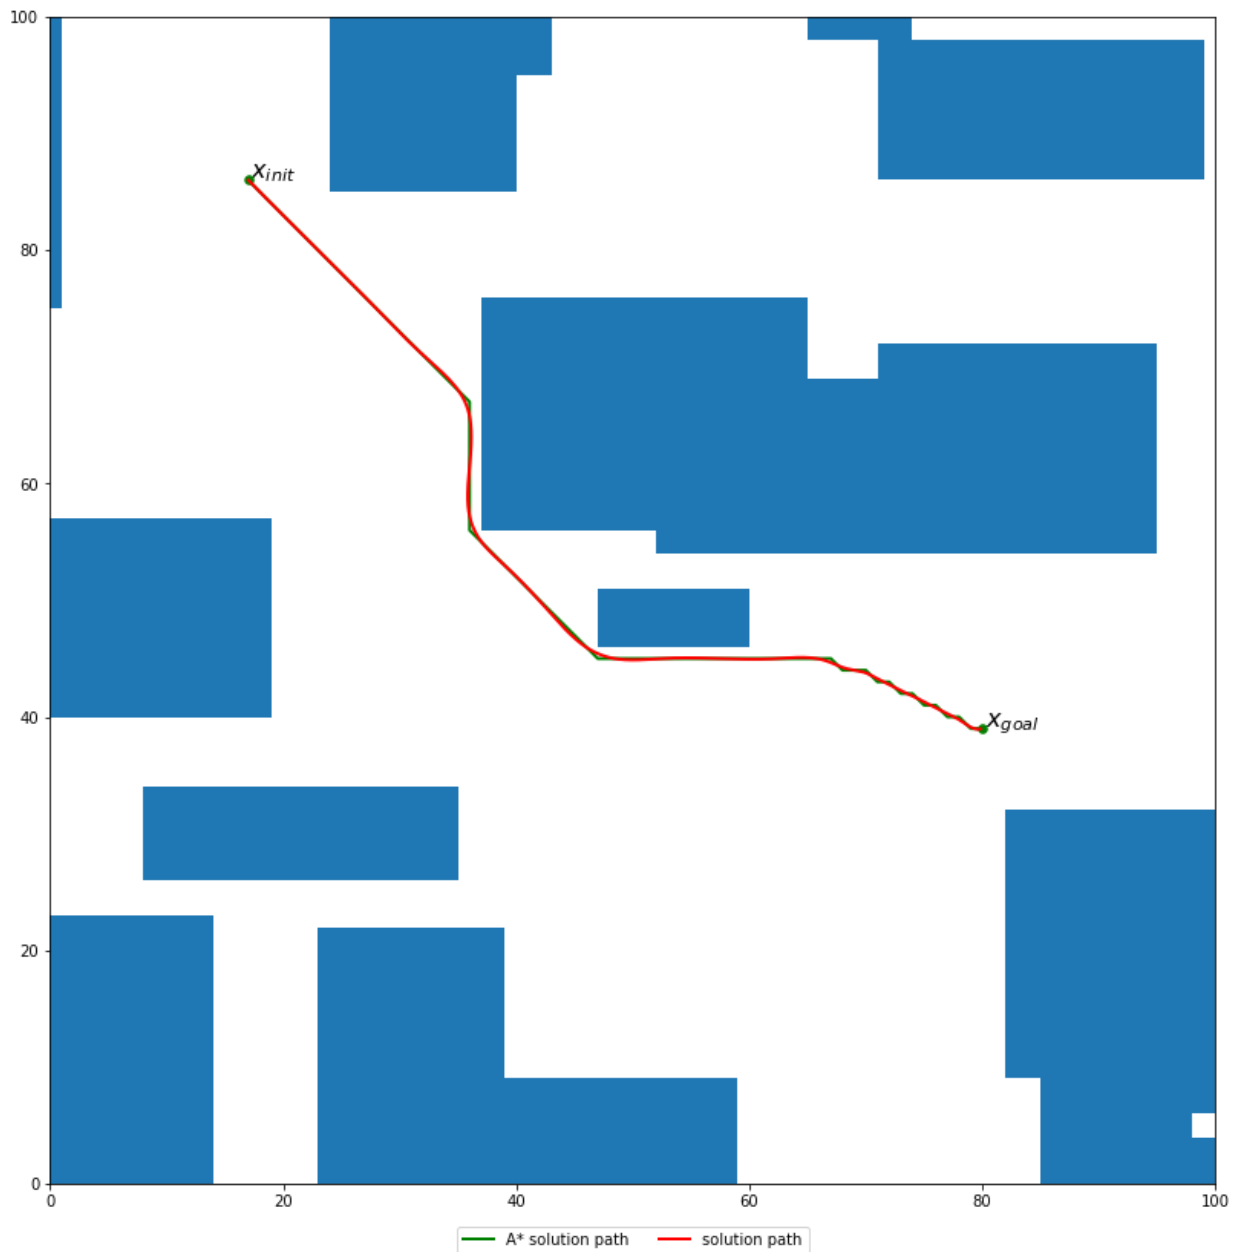

Control-Feasible Trajectory Generation and Tracking

Robot control limits

```

In [29]: v_max = 0.5 # max speed
          om_max = 1 # max rotational speed

```

Tracking control gains

Tune these as needed to improve tracking performance.

```
In [30]: kpx = 2
         kpy = 2
         kdx = 2
         kdy = 2
```

Generate control-feasible trajectory

```
In [31]: t_new, V_smooth_scaled, om_smooth_scaled, traj_smooth_scaled = modify_traj_with
```

Create trajectory controller and load trajectory

```
In [32]: traj_controller = TrajectoryTracker(kpx=kpx, kpy=kpy, kdx=kdx, kdy=kdy, V_max=V
         traj_controller.load_traj(t_new, traj_smooth_scaled)
```

Set simulation input noise

(Try changing this and see what happens)


```
In [33]: noise_scale = 0.05
```

Simulate closed-loop tracking of smoothed trajectory, compare to open-loop

```
In [34]: tf_actual = t_new[-1]
         times_cl = np.arange(0, tf_actual, dt)
         s_0 = State(x=x_init[0], y=x_init[1], V=V_max, th=traj_smooth_scaled[0,2])
         s_f = State(x=x_goal[0], y=x_goal[1], V=V_max, th=traj_smooth_scaled[-1,2])

         actions_ol = np.stack([V_smooth_scaled, om_smooth_scaled], axis=-1)
         states_ol, ctrl_ol = simulate_car_dyn(s_0.x, s_0.y, s_0.th, times_cl, actions=actions_ol)
         states_cl, ctrl_cl = simulate_car_dyn(s_0.x, s_0.y, s_0.th, times_cl, controller=traj_controller)

         fig = plt.figure()
         astar.plot_path(fig.number)
         plot_traj_smoothed(traj_smooth_scaled)
         def plot_traj_ol(states_ol):
             plt.plot(states_ol[:,0], states_ol[:,1], color="orange", linewidth=1, label="Open Loop")
         def plot_traj_cl(states_cl):
             plt.plot(states_cl[:,0], states_cl[:,1], color="purple", linewidth=1, label="Closed Loop")
         plot_traj_ol(states_ol)
         plot_traj_cl(states_cl)
         plt.legend(loc='upper center', bbox_to_anchor=(0.5, -0.03), fancybox=True, ncol=2)
         plt.show()
```

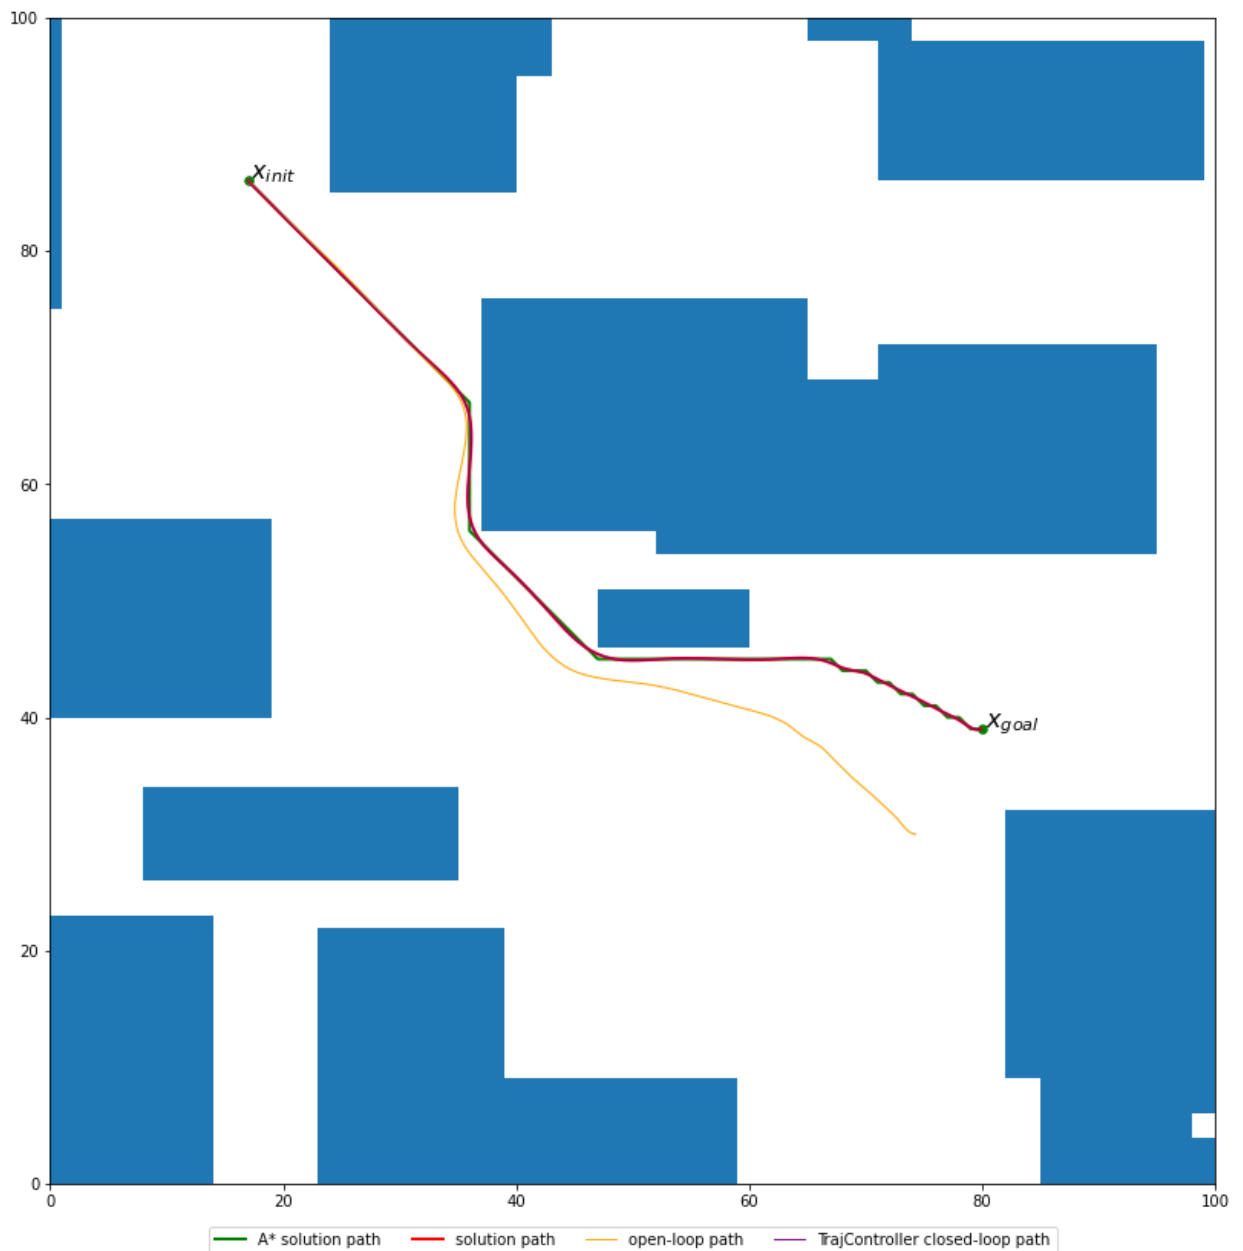


Switching from Trajectory Tracking to Pose Stabilization Control

Zoom in on final pose error

```
In [35]: l_window = 4.

fig = plt.figure(figsize=[7,7])
astar.plot_path(fig.number, show_init_label = False)
plot_traj_smoothed(traj_smoothed)
plot_traj_cl(states_cl)
plot_traj_ol(states_ol)
plt.legend(loc='upper center', bbox_to_anchor=(0.5, -0.03), fancybox=True, ncol=2)
plt.axis([x_goal[0]-l_window/2, x_goal[0]+l_window/2, x_goal[1]-l_window/2, x_goal[1]+l_window/2])
plt.show()
```

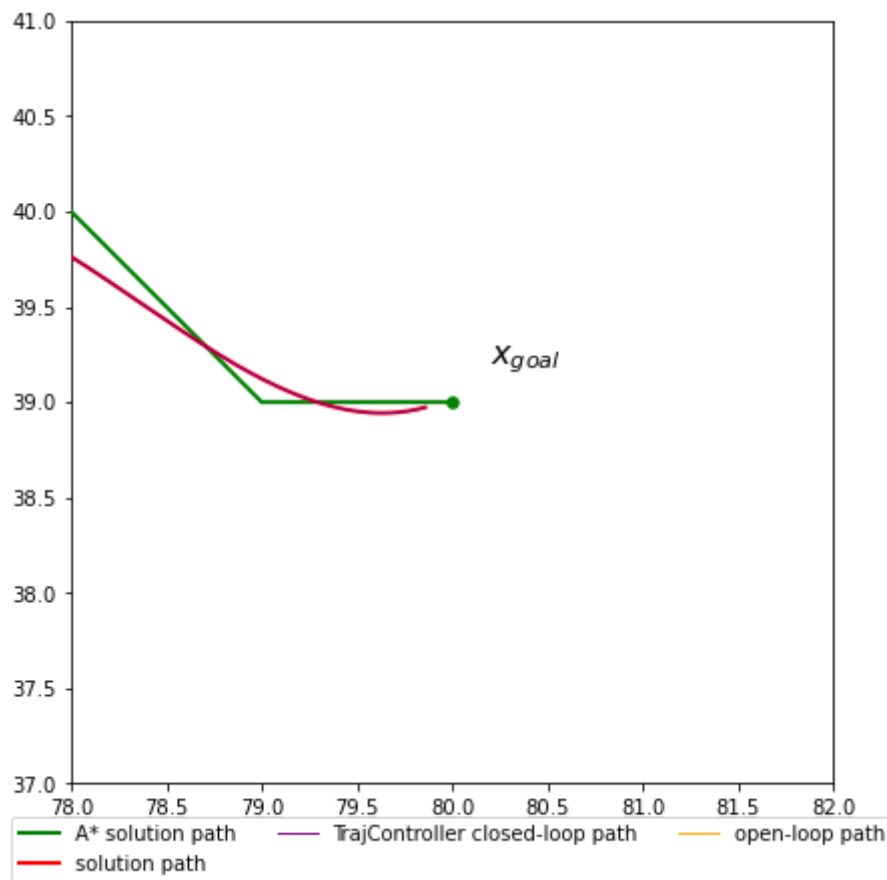

Pose stabilization control gains

Tune these as needed to improve final pose stabilization.

```
In [36]: k1 = 1.
          k2 = 0.5
          k3 = 0.5
```

Create pose controller and load goal pose

Note we use the last value of the smoothed trajectory as the goal heading θ

```
In [37]: pose_controller = PoseController(k1, k2, k3, V_max, om_max)
          pose_controller.load_goal(x_goal[0], x_goal[1], traj_smooth_scaled[-1,2])
```

Time before trajectory-tracking completion to switch to pose stabilization


Try changing this!

```
In [38]: t_before_switch = 5.0
```

Create switching controller and compare performance

```
In [39]: switching_controller = SwitchingController(traj_controller, pose_controller, t_
t_extend = 60.0 # Extra time to simulate after the end of the nominal trajectory
times_cl_extended = np.arange(0, tf_actual+t_extend, dt)
states_cl_sw, ctrl_cl_sw = simulate_car_dyn(s_0.x, s_0.y, s_0.th, times_cl_exte


fig = plt.figure()
astar.plot_path(fig.number)
plot_traj_smoothed(traj_smoothed)
plot_traj_cl(states_cl)
def plot_traj_cl_sw(states_cl_sw):
    plt.plot(states_cl_sw[:,0], states_cl_sw[:,1], color="black", linewidth=1,
plot_traj_cl_sw(states_cl_sw)
plt.legend(loc='upper center', bbox_to_anchor=(0.5, -0.03), fancybox=True, ncol
plt.show()
```

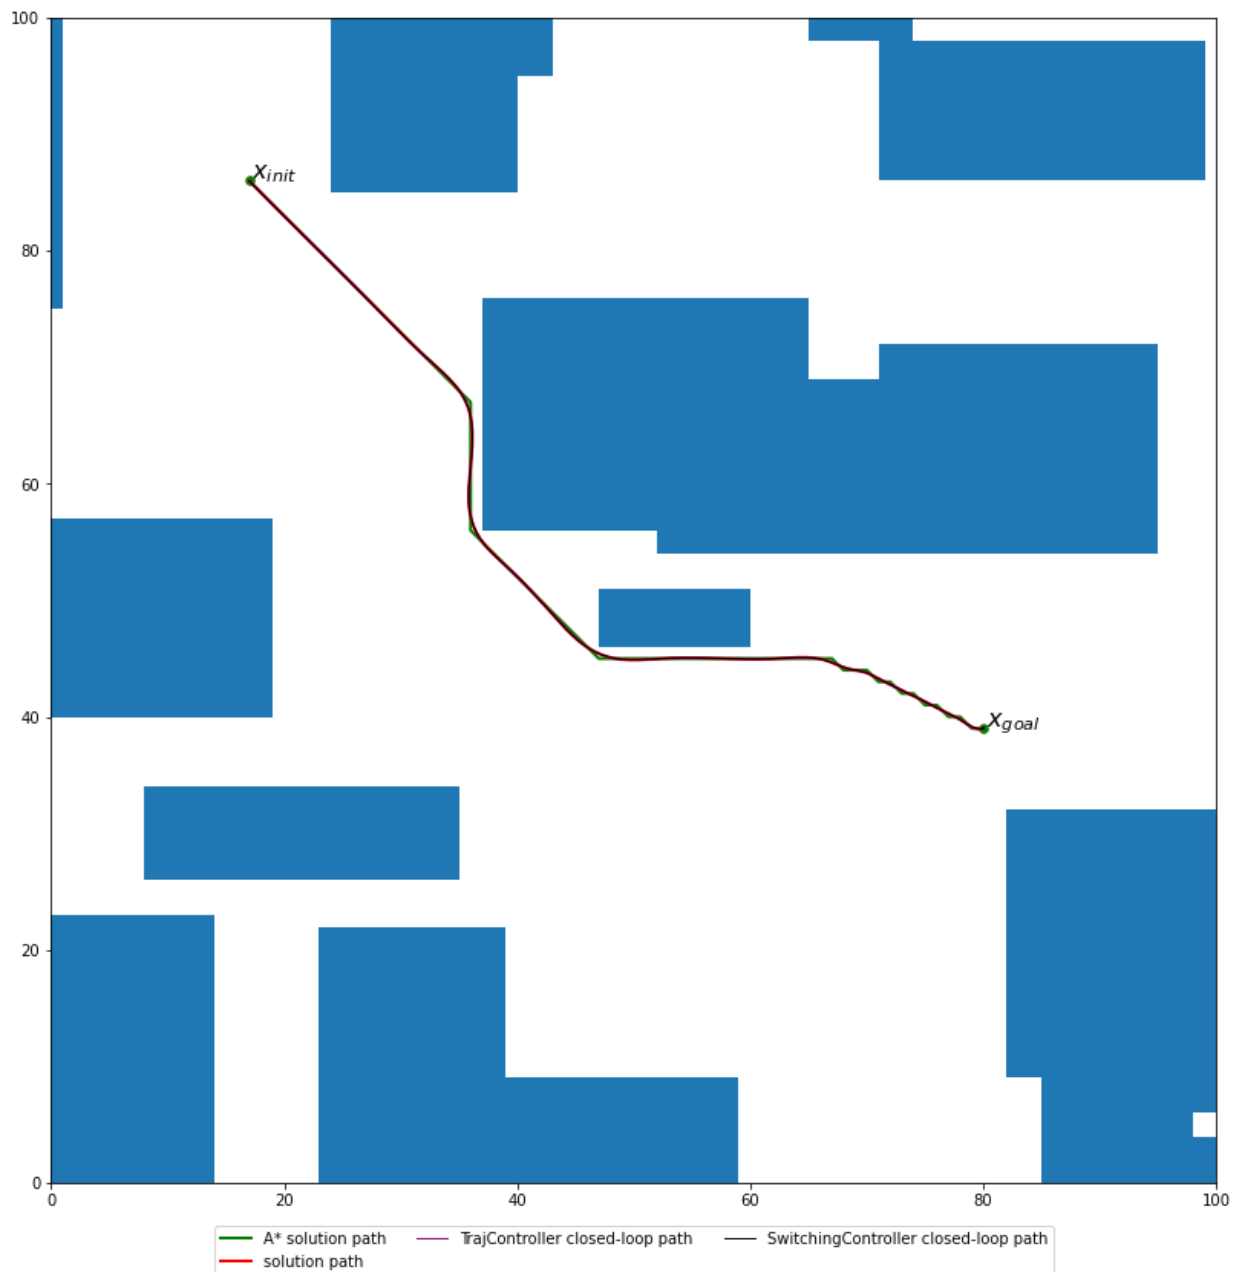

Zoom in on final pose

```
In [40]: l_window = 4.

fig = plt.figure(figsize=[7,7])
astar.plot_path(fig.number, show_init_label = False)
plot_traj_smoothed(traj_smoothed)
plot_traj_ol(states_ol)
plot_traj_cl(states_cl)
plot_traj_cl_sw(states_cl_sw)
plt.legend(loc='upper center', bbox_to_anchor=(0.5, -0.03), fancybox=True, ncol=2)
plt.axis([x_goal[0]-l_window/2, x_goal[0]+l_window/2, x_goal[1]-l_window/2, x_goal[1]+l_window/2])
plt.show()
```

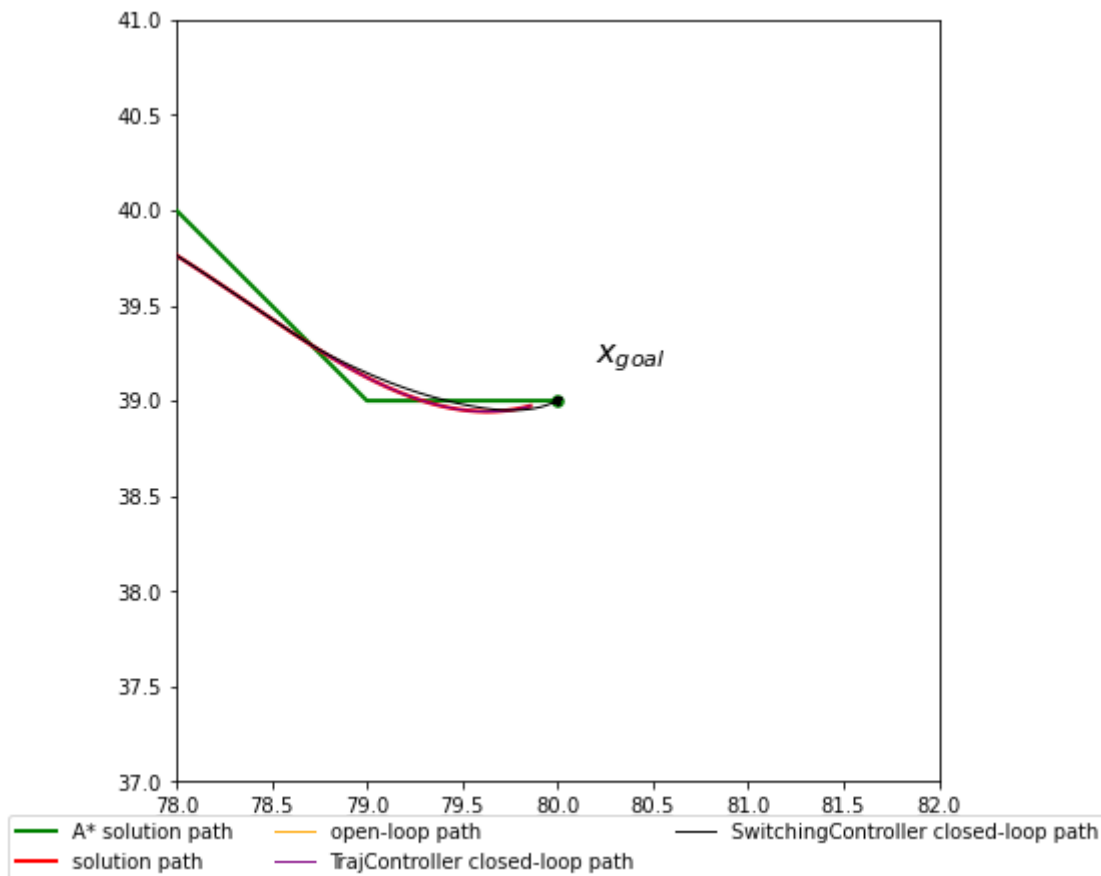


Plot final sequence of states

To see just how well we're able to arrive at the target point (and to assist in choosing values for the pose stabilization controller gains k_1, k_2, k_3), we plot the error in x and y for both the tracking controller and the switching controller at the end of the trajectory.

```
In [41]: T = len(times_cl) - int(t_before_switch/dt)
fig = plt.figure(figsize=[10,10])
plt.subplot(2,1,1)
plt.plot([times_cl_extended[T], times_cl_extended[-1]], [0,0], linestyle='--',
plt.plot(times_cl[T:], states_cl[T:,0] - x_goal[0], label='TrajController')
plt.plot(times_cl_extended[T:], states_cl_sw[T:,0] - x_goal[0], label='SwitchingController')
plt.legend()
plt.ylabel("x error (m)")
plt.subplot(2,1,2)
plt.plot([times_cl_extended[T], times_cl_extended[-1]], [0,0], linestyle='--',
plt.plot(times_cl[T:], states_cl[T:,1] - x_goal[1], label='TrajController')
```

```
plt.plot(times_cl_extended[T:], states_cl_sw[T:,1] - x_goal[1], label='SwitchingController')  
plt.legend()  
plt.ylabel("y error (m)")
```

Out[41]: Text(0, 0.5, 'y error (m)')

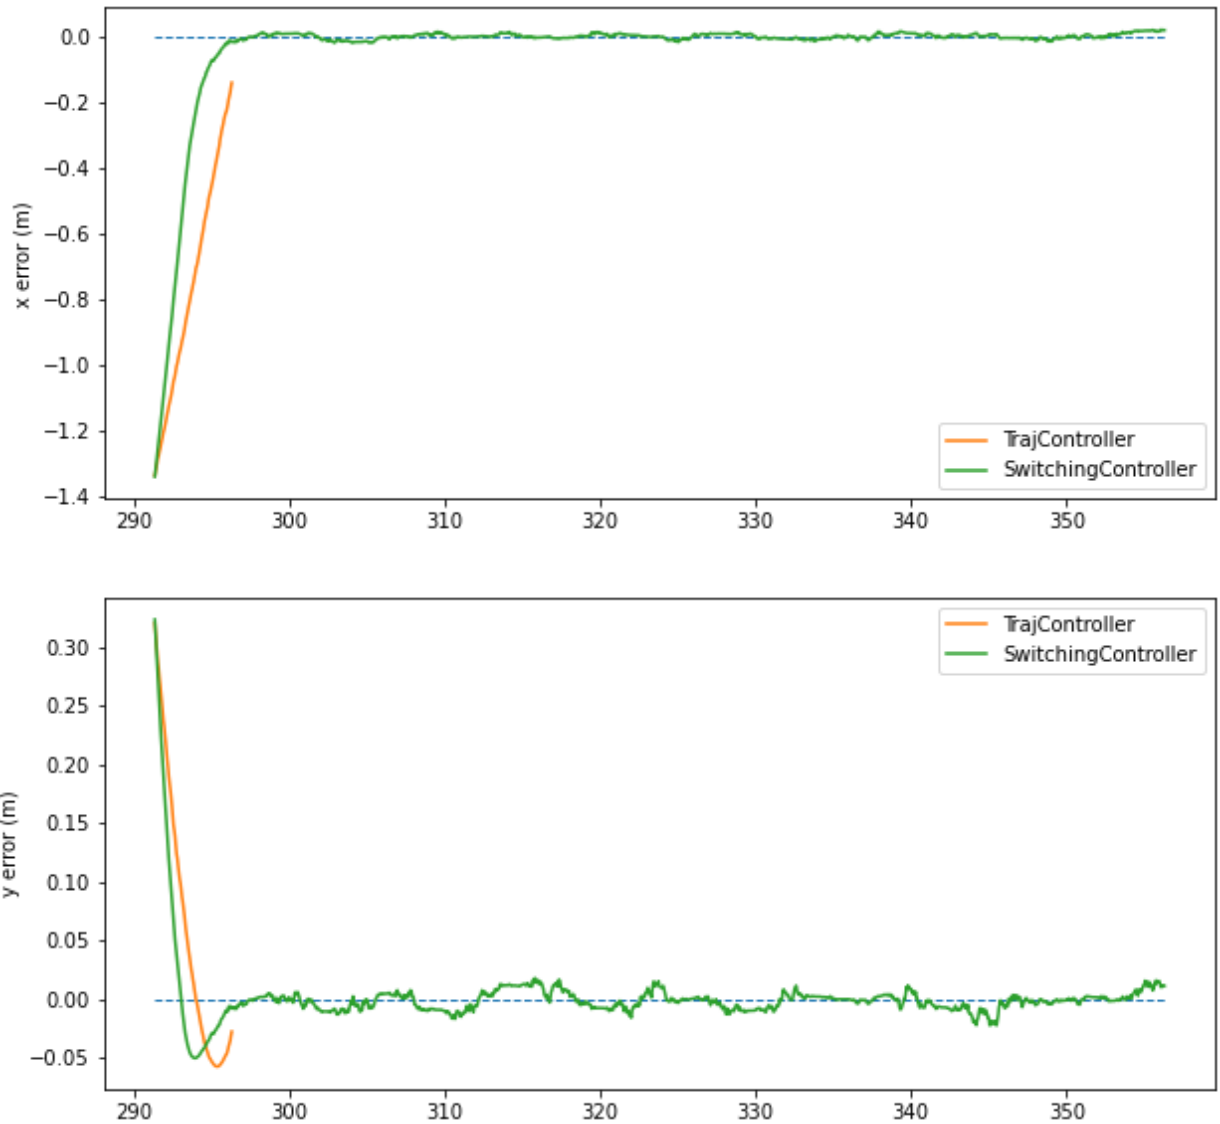

In []:

In []:

In []: