

Decision and Risk Analysis

Lecture 2: **Bayes' Rule**

DAEN 427/ISEN 427/ISEN 627

Alexander Abuabara

Fall 2026




Cornell University

Learn about arXiv becoming an independent nonprofit.

We gratefully acknowledge support from the Simons Foundation, member institutions, and all contributors.

[Donate](#)

arXiv > cs > arXiv:1708.01967

[Help](#) | [Advanced Search](#)

Computer Science > Social and Information Networks

[Submitted on 7 Aug 2017 (v1), last revised 3 Sep 2017 (this version, v3)]

Fake News Detection on Social Media: A Data Mining Perspective

[Kai Shu](#), [Amy Silva](#), [Suhang Wang](#), [Jiliang Tang](#), [Huan Liu](#)

Social media for news consumption is a double-edged sword. On the one hand, its low cost, easy access, and rapid dissemination of information lead people to seek out and consume news from social media. On the other hand, it enables the wide spread of "fake news", i.e., low quality news with intentionally false information. The extensive spread of fake news has the potential for extremely negative impacts on individuals and society. Therefore, fake news detection on social media has recently become an emerging research that is attracting tremendous attention. Fake news detection on social media presents unique characteristics and challenges that make existing detection algorithms from traditional news media ineffective or not applicable. First, fake news is intentionally written to mislead readers to believe false information, which makes it difficult and nontrivial to detect based on news content; therefore, we need to include auxiliary information, such as user social engagements on social media, to help make a determination. Second, exploiting this auxiliary information is challenging in and of itself as users' social engagements with fake news produce data that is big, incomplete, unstructured, and noisy. Because the issue of fake news detection on social media is both challenging and relevant, we conducted this survey to further facilitate research on the problem. In this survey, we present a comprehensive review of detecting fake news on social media, including fake news characterizations on psychology and social theories, existing algorithms from a data mining perspective, evaluation metrics and representative datasets. We also discuss related research areas, open problems, and future research directions for fake news detection on social media.

Comments: ACM SIGKDD Explorations Newsletter, 2017
Subjects: Social and Information Networks (cs.SI); Artificial Intelligence (cs.AI)
ACM classes: H.2.8
Cite as: arXiv:1708.01967 [cs.SI]
(or arXiv:1708.01967v3 [cs.SI] for this version)
<https://doi.org/10.48550/arXiv.1708.01967>

Submission history

From: Kai Shu [\[view email\]](#)

[v1] Mon, 7 Aug 2017 02:29:09 UTC (395 KB)

[v2] Wed, 9 Aug 2017 00:25:03 UTC (361 KB)

[v3] Sun, 3 Sep 2017 02:40:05 UTC (361 KB)

Access Paper:

[View PDF](#)
[TeX Source](#)
[view license](#)

Current browse context:
cs.SI
< prev | next >
new | recent | 2017-08
Change to browse by:
cs
cs.AI

References & Citations

[NASA ADS](#)
[Google Scholar](#)
[Semantic Scholar](#)

DBLP – CS Bibliography

[listing](#) | [bibtext](#)
[Kai Shu](#)
[Amy Silva](#)
[Suhang Wang](#)
[Jiliang Tang](#)
[Huan Liu](#)


Export BibTeX Citation

Bookmark


<https://arxiv.org/abs/1708.01967> for details.

Framework

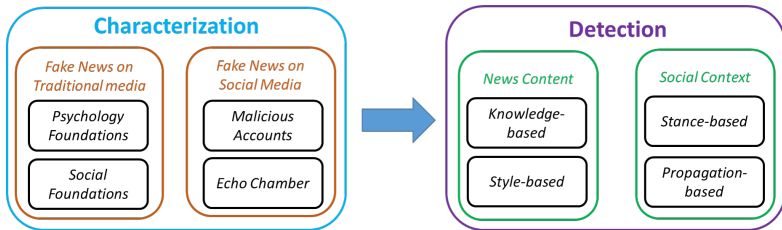

<https://arxiv.org/abs/1708.01967> for details.

Future Directions

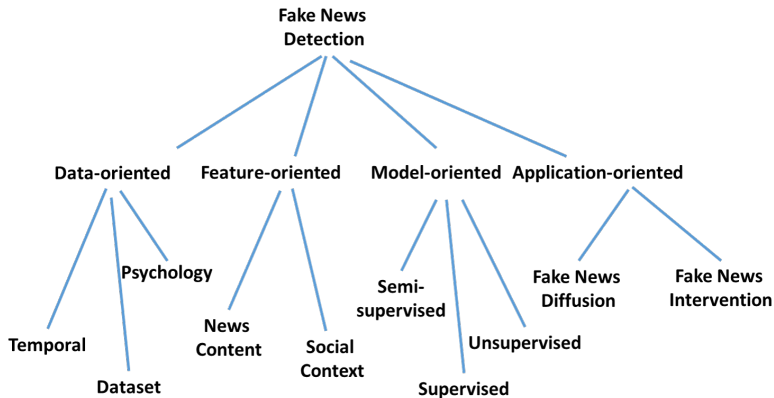

<https://arxiv.org/abs/1708.01967> for details.

Building a Bayesian Model for Events

Before reading anything,
we can use prior knowledge from historical data.

Valid Probability Model

A probability model must satisfy:

Building a Bayesian Model for Events

Before reading anything,
we can use prior knowledge from historical data.

Valid Probability Model

A probability model must satisfy:

1. Cover all possible events.
2. Assign probabilities to each event.
3. Probabilities sum to one.

We're Using R Instead of Python

Python

- "Can do everything" ... installs n packages, breaks after update
- Stack Overflow becomes your TA

R → <https://cran.r-project.org>

- Literally for statistics; `lm(y ~ x)` and move on with your life
- Excellent, open-source, keeps us focused on data analysis, ... and I enjoy sleeping at night!

What I Need From You: learn concepts, analyze data, pass the class!

What I Do Not Need: a 2-hour debate about virtual environments.

Dataset

```
1  # Load packages
2  library(bayesrules)
3  library(tidyverse)
4  library(janitor)
5
6  # Import article data
7  data(fake_news)
8
9  fake_news %>%
10     tabyl(type) %>%
11     adorn_totals("row")
12
13  #   type    n percent
14  #   fake   60     0.4
15  #   real   90     0.6
16  # Total 150     1.0
```

Prior Probability Model

- 150 news articles:
60 fake, 90 real
- $P(\text{Fake}) = \frac{60}{150} = 0.40$.
Before looking at the headline,
the prior probability that an
article is fake is 40%.

Prior Belief: there is a 40% chance an article is fake before observing any evidence.


$$P(B) = 0.40 \quad \leftrightarrow \quad P(B^c) = 0.60$$

where B : article is **fake**, B^c : article is **real**.


$$P(B) + P(B^c) = 0.40 + 0.60 = 1$$

Event	B	B^c	Total
Probability	0.4	0.6	1

Bayesian reasoning to estimate whether a news article is fake:

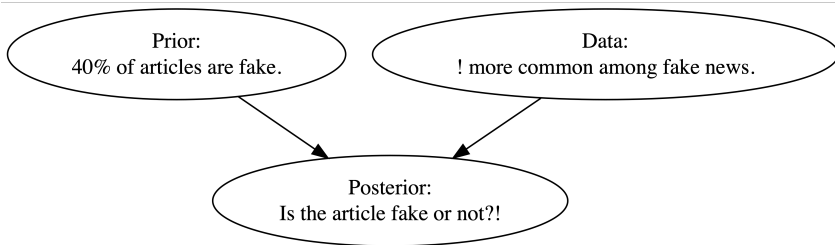

DAG: Directed Acyclic Graph



A = exclamation points "!" B = fake status "🤖"

- A **DAG** shows how variables are connected.
- The arrow means A may be associated with B .
- **Acyclic** means the arrows do not loop back.

DAGs and Conditional Probability

- The DAG suggests that the chance of B may depend on A .

$$P(B \mid A)$$

In words: the probability of article is fake **given**
the exclamation point in the title.

DAGs and Conditional Probability

- The DAG suggests that the chance of B may depend on A .

$$P(B \mid A)$$

In words: the probability of article is fake **given**
the exclamation point in the title.

- If A changes the probability of B ,
then the events are **dependent**.

$$P(B \mid A) \neq P(B)$$

DAGs and Conditional Probability

- The DAG suggests that the chance of B may depend on A .

$$P(B \mid A)$$

In words: the probability of article is fake **given**
the exclamation point in the title.

- If A changes the probability of B ,
then the events are **dependent**.

$$P(B \mid A) \neq P(B)$$

- If knowing A does not change the probability of B ,
then they are **independent**.

$$P(B \mid A) = P(B)$$

```
1 # Transposed version of head()
2 # ... makes possible to see all columns in a data frame
3 glimpse(fake_news)
```


Observed headline pattern:

```
1 # Tabulate exclamation usage and article type
2 fake_news %>%
3   tabyl(title_has_excl, type) %>%
4   adorn_totals("row")
5 # title_has_excl fake real
6 #           FALSE  44   88
7 #           TRUE   16    2
8 #           Total   60   90
```



Code: <https://abuabara.github.io/DAEN427F26/Lecture2.R>

Exclamation Points as Evidence

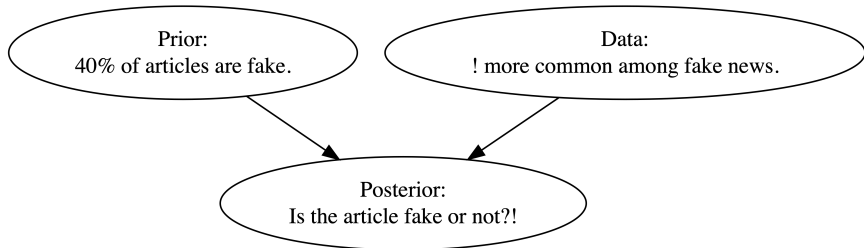

Title Has "!"	Fake	Real	Total
Yes	16	2	18
No	44	88	132
Total	60	90	150

Conditional Probability & Likelihood

Title Has "!"	Fake	Real	Total
Yes	16	2	18
No	44	88	132
Total	60	90	150

$$P(! \mid \text{Fake}) = \frac{16}{60} \approx 0.267, P(! \mid \text{Real}) = \frac{2}{90} \approx 0.022$$

An exclamation point increases the probability that an article is fake.

Conditional Probability & Likelihood

B : article is fake

B^c : article is real

A : article uses exclamation points

A^c : article does not use exclamation points

From the data:

$$P(A \mid B) = 0.267 \quad P(A \mid B^c) = 0.022$$

Fake news articles are **much more likely** to use exclamation points than real news articles.

Conditional vs Unconditional Probability

- **Unconditional probability** is the chance something happens without extra information.

$$P(A)$$

- **Conditional probability** is the chance something happens given that something else is already known.

$$P(A \mid B)$$

- Comparing $P(A)$ and $P(A \mid B)$ tells us whether knowing B changes how likely A is.

Independent Events

- Two events are **independent** if knowing one happens does not change the probability of the other.
- *Example*: rolling a die and flipping a coin are independent, because the die result **does not** affect the coin flip.
- In symbols:

$$P(A \mid B) = P(A)$$

From Probability to Likelihood

- Earlier, we computed:

$$P(A \mid B) = 0.2667 \quad P(A \mid B^c) = 0.0222$$

- Fake articles are much more likely to use exclamation points.
- Suppose we already observed an article with exclamations.

Now the question becomes:

Is the article more likely fake or real?

What is Likelihood?

- **Probability** starts with a known cause and predicts data.

$$P(A \mid B)$$

- **Likelihood** starts with observed data and compares possible causes.

$$\mathcal{L}(B \mid A) = P(A \mid B)$$

- In our example:
 - A : article uses exclamation points
 - B : article is fake
 - Since

$$P(A \mid B) > P(A \mid B^c)$$

exclamation provide evidence that the article may be fake.

Probability	Likelihood
Known condition	Known data
Predicts outcomes	Compares explanations
$P(A \mid B)$	$\mathcal{L}(B \mid A)$

- The distinction is **subtle**, especially since people use the terms “likelihood” and “probability” interchangeably in casual conversation.
- Likelihood **helps us decide** which explanation best fits the observed data.

- The likelihood function **is not** a probability function, but rather provides a framework to compare the relative compatibility of our exclamation point data with B and B^c .

Event	B	B^c	Total
Prior probability	0.4	0.6	1
Likelihood ($\cdot \mid A$)	0.2667	0.0232	0.2889


Quiz

Two boxes are available:

- Box 1 contains 4 red and 2 green balls.
- Box 2 contains 2 red and 4 green balls.
- The probability of choosing either box is equal:

$$P(E_1) = P(E_2) = \frac{1}{2}.$$

- A box is selected at random, and one ball is drawn.
- Study the **likelihood** of observing a red ball under each box.

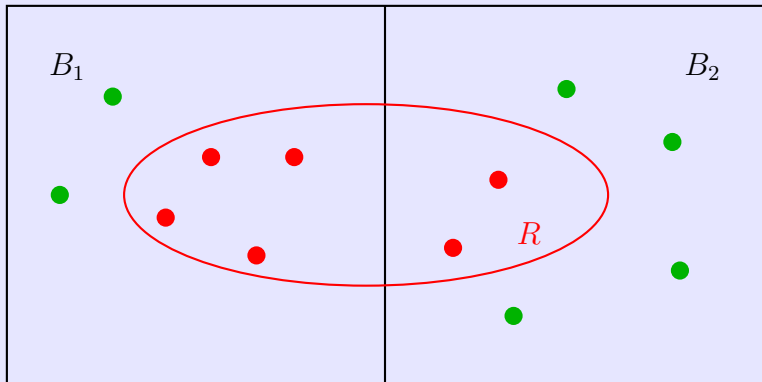

Answer: A red ball is more consistent with Box 1 than with Box 2.

The likelihoods are: $P(R \mid B_1) = \frac{4}{6} = \frac{2}{3}$ and $P(R \mid B_2) = \frac{2}{6} = \frac{1}{3}$.

So, if Box 1 had been selected, observing a red ball would be more likely.

$$P(R \mid B_1) > P(R \mid B_2)$$

Therefore, the red ball provides stronger evidence for Box 1 than for Box 2.

$$\frac{P(R \mid B_1)}{P(R \mid B_2)} = \frac{\frac{2}{3}}{\frac{1}{3}} = 2$$

The observed red ball is **twice** as likely under Box 1 as under Box 2. Since the boxes were equally likely before the draw, the red ball favors Box 1.

Recap

A = article uses exclamation points

A^c = article does not use exclamation points

B = article is fake news

B^c = article is real news

From the prior model:

$$P(B) = 0.4 \quad P(B^c) = 0.6$$

So, 40% of articles are fake and 60% are real.

Normalizing Constants

- The marginal probability of observing exclamation points across all articles is $P(A)$.
- This is called the **normalizing constant**.

Normalizing Constants

- The marginal probability of observing exclamation points across all articles is $P(A)$.
- This is called the **normalizing constant**.
- To calculate it, we split articles into two groups:

$$P(A) = P(A \cap B) + P(A \cap B^c)$$

- That is:
Exclamations = fake with exclamations + real with exclamations

Joint Probability Table

	B	B^c	Total
A	$P(A \cap B)$	$P(A \cap B^c)$	$P(A)$
A^c	$P(A^c \cap B)$	$P(A^c \cap B^c)$	$P(A^c)$
Total	0.4	0.6	1

- Each inside cell is a **joint probability**.
- For example: $P(A \cap B)$ means the probability that an article is fake and uses exclamation points.

Fake Articles **with** Exclamation Points

- To determine the probabilities of these joint events, note that 40% of articles are fake and 26.67% of fake articles use exclamation points, $P(B) = 0.4$ and $P(A | B) = 0.2667$.
- The joint probability is
$$P(A \cap B) = P(A | B) P(B) = 0.2667 \cdot 0.4 = 0.1067$$
- So, 10.67% of all articles are fake and use exclamation points.

	B	B^c	Total
A	$0.4 \cdot 16/60 = \mathbf{0.107}$	$P(A \cap B^c)$	$32/150 = 0.12$
A^c	$P(A^c \cap B)$	$P(A^c \cap B^c)$	$118/150 = 0.78$
Total	0.4	0.6	1

Fake Articles **without** Exclamation Points

- Since 26.67% of fake articles use exclamation points,
 $1 - 0.2667 = 73.33\%$ do not use exclamation points.
- Then,
$$P(A^c \cap B) = P(A^c \mid B) P(B) = 0.7333 \cdot 0.4 = 0.2933$$
- So, 29.33% of all articles are fake and do not use exclamation.

Checking the Fake Article Total

The fake-news column is split into two parts:

$$P(A \cap B) \quad \text{and} \quad P(A^c \cap B)$$

Therefore,

$$P(B) = P(A \cap B) + P(A^c \cap B)$$

$$P(B) = 0.1067 + 0.2933$$

$$P(B) = 0.4$$

This matches the prior probability that an article is fake.

Real Articles

From the likelihood function: $P(A \mid B^c) = 0.0222$

So only 2.22% of real articles use exclamation points.

The joint probability is

$$P(A \cap B^c) = P(A \mid B^c)P(B^c)$$

$$P(A \cap B^c) = 0.0222 \cdot 0.6$$

$$P(A \cap B^c) = 0.0133$$

So, 1.33% of all articles are real and use exclamation points.

Real Articles without Exclamation Points

Since

$$P(A \mid B^c) = 0.0222$$

we have

$$P(A^c \mid B^c) = 1 - 0.0222$$

$$P(A^c \mid B^c) = 0.9778$$

Then

$$P(A^c \cap B^c) = P(A^c \mid B^c) P(B^c)$$

$$P(A^c \cap B^c) = 0.9778 \cdot 0.6$$

$$P(A^c \cap B^c) = 0.5867$$

Completed Joint Probability Table

	B	B^c	Total
A	0.107	0.013	0.12
A^c	0.293	0.587	0.88
Total	0.4	0.6	1

The row total for A gives the **normalizing constant**:

$$P(A) = 0.107 + 0.013 = \boxed{0.12}$$

So, 12% of all articles use exclamation points.

Joint Probability

The calculations use the relationship

$$P(A \cap B) = P(A \mid B)P(B)$$

This connects: joint probability


with: conditional probability $\times$ prior probability

Rearranging gives the conditional probability formula:

$$P(A \mid B) = \frac{P(A \cap B)}{P(B)}$$

PS. If A and B are **independent**, then: $P(A \cap B) = P(A) P(B)$

Representation of Conditional Probability

$$P(A \mid B) = \frac{P(A \cap B)}{P(B)} = \frac{\text{Diagram 1}}{\text{Diagram 2}}$$


The image shows two Venn diagrams used to represent conditional probability. The top diagram, representing the numerator $P(A \cap B)$, shows two overlapping circles, A and B, within a rectangular frame. The intersection of the two circles is shaded in a light brown color. The bottom diagram, representing the denominator $P(B)$, shows the same two overlapping circles, A and B, within a rectangular frame. The entire circle B, including its intersection with circle A, is shaded in the same light brown color.

Conditional Probability

Conditional probability answers the question:

"What is the probability of A given that B has occurred?"

The definition is:

$$P(A \mid B) = \frac{P(A \cap B)}{P(B)} \quad \text{where } P(B) \neq 0$$

- Start with the probability that both A and B occur
- Restrict attention only to situations where B occurs
- Measure how often A also occurs

Example: $P(\text{Rain} \mid \text{Cloudy}) = \frac{P(\text{Rain and Cloudy})}{P(\text{Cloudy})}$

Law of Total Probability

Suppose event A can happen in two distinct ways:

$$A \cap B \quad \text{or} \quad A \cap B^c$$

Since B and B^c cover all possibilities, we can write:

$$P(A) = P(A \cap B) + P(A \cap B^c)$$

Using the joint probability rule:

$$P(A \cap B) = P(A \mid B)P(B)$$

we get the **Law of Total Probability**:

$$P(A) = P(A \mid B)P(B) + P(A \mid B^c)P(B^c)$$

Exclamation Points in News Articles

A = article uses an exclamation point

B = article is fake news

$$P(A | B) = 0.2667, \quad P(B) = 0.4$$

$$P(A | B^c) = 0.0222, \quad P(B^c) = 0.6$$

Then:

$$P(A) = 0.2667 (0.4) + 0.0222 (0.6)$$

$$P(A) = 0.1067 + 0.0133 = 0.12$$

So, about **12% of all articles** use exclamation points.

	B	B^c	Total
A	0.107	0.013	0.12
A^c	0.293	0.587	0.88
Total	0.4	0.6	1

$$P(A) = 0.107 + 0.013 = \boxed{0.12}$$