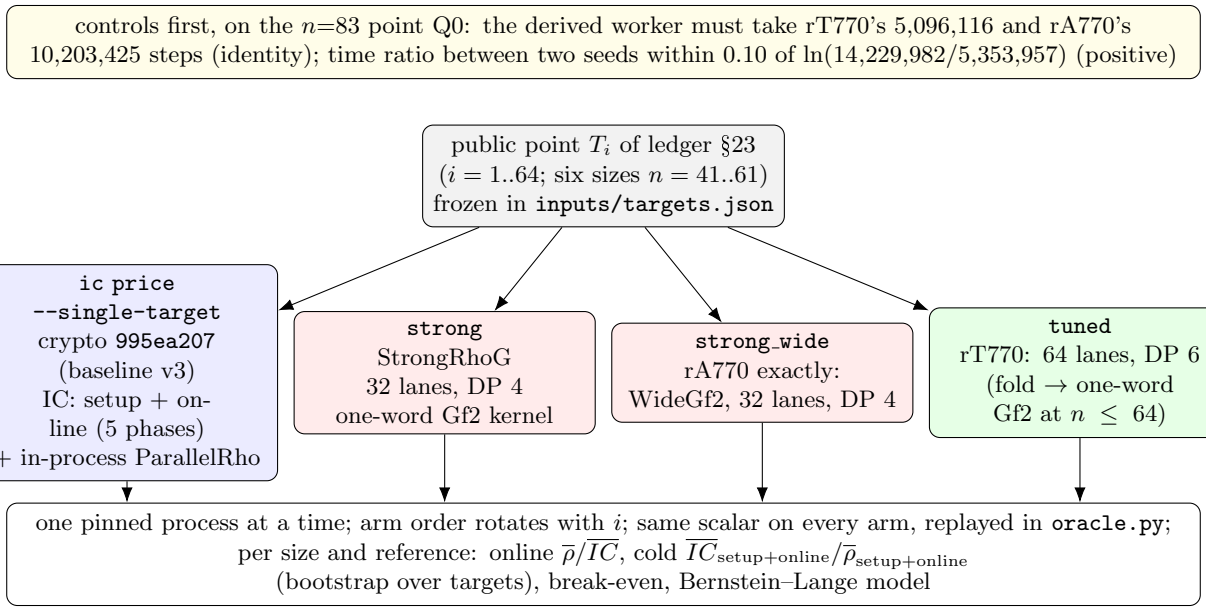

controls first, on the n=83 point Q0: the derived worker must take rT770's 5,096,116 and rA770's 10,203,425 steps (identity); time ratio between two seeds within 0.10 of ln(14,229,982/5,353,957) (positive)
public point T_i of ledger §23 ($i = 1..64$; six sizes $n = 41..61$) frozen in inputs/targets.json
ic price --single-target crypto 995ea207 (baseline v3) IC: setup + online (5 phases) + in-process ParallelRho
strong StrongRhoG 32 lanes, DP 4 one-word Gf2 kernel
strong_wide rA770 exactly: WideGf2, 32 lanes, DP 4
tuned rT770: 64 lanes, DP 6 (fold → one-word Gf2 at $n \leq 64$)
one pinned process at a time; arm order rotates with i; same scalar on every arm, replayed in oracle.py; per size and reference: online $\overline{\rho}/\overline{IC}$, cold $\overline{IC}_{\text{setup+online}}/\overline{\rho}_{\text{setup+online}}$ (bootstrap over targets), break-even, Bernstein–Lange model