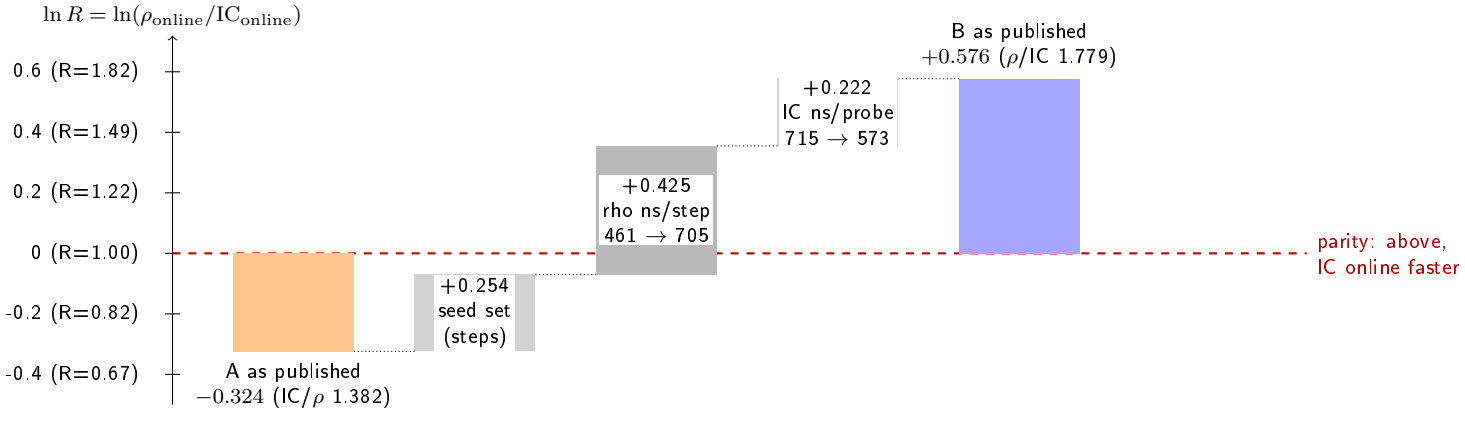


Exact identity: $R = (\text{steps} \times \text{ns/step})/(\text{probes} \times \text{ns/probe})$ and both experiments' IC took 8,845,441 probes on Q0, so probes cancel. Steps: A's five seeds, geometric mean 9,929,669; B's seed 831000, 12,804,216 (1.42 floor). ns/step: A's StrongRhoG on A's host 461 (geometric mean); B's rung 3 on the runner 705. ns/probe: A's producer on A's host 715; B's on the runner 573. Each component alone from A: seed 0.933, rho ns/step 1.106, IC ns/probe 0.903 (only the rho ns/step component crosses parity by itself). Timer boundaries ($< 10^{-4}$), the log cache (identical probes; +0.8% fresh vs cached on B's runner) and the rank seed (identical probes) contribute nothing measurable. Whether the ns/step and ns/probe components are code or host is what the run decides.