

(a) One-target IC online interval, Q0 (target_query_begin .. recovery_check_end)



(b) Inside target_PDP: per index state, then per partner root (one probe)

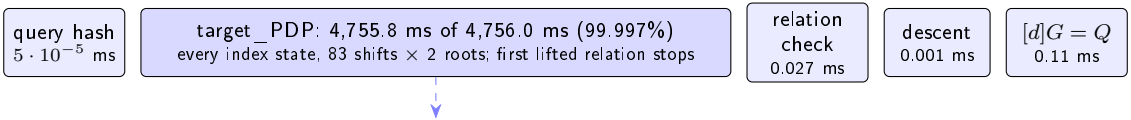

(c) E-1 stage (stage level): canonicalization is its own timed phase

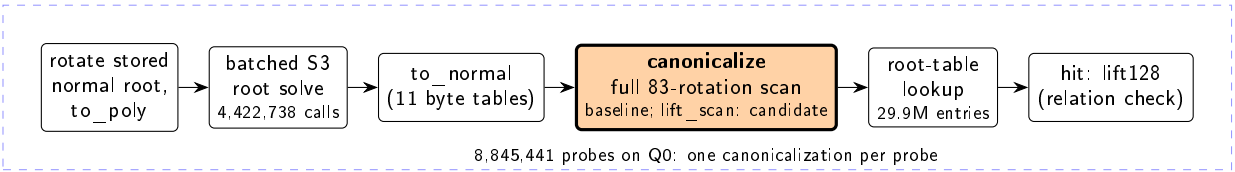