One index state: 2n = 166 candidates, about 332 partner probes

combined (pC): one probe at a time

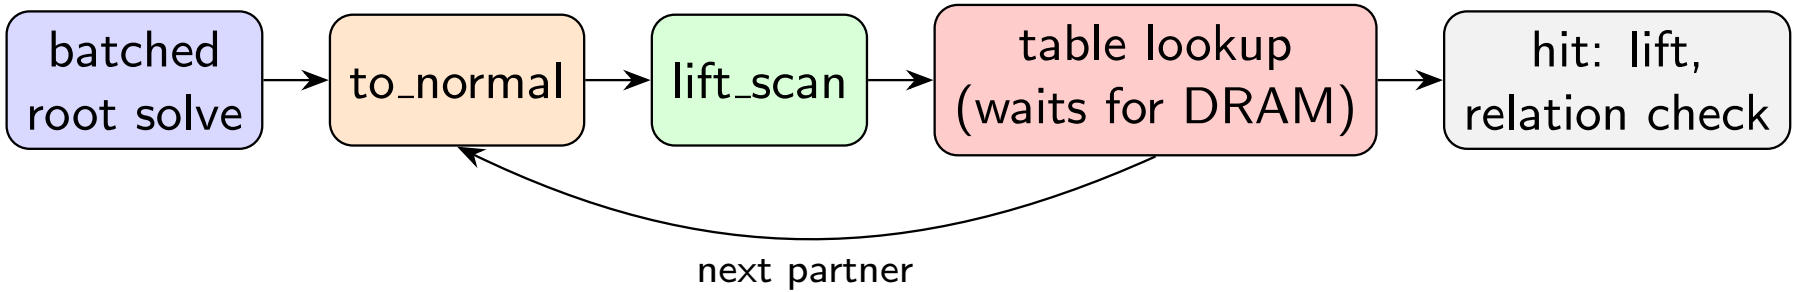

pipelined (pP): all keys first, then all lookups, same order

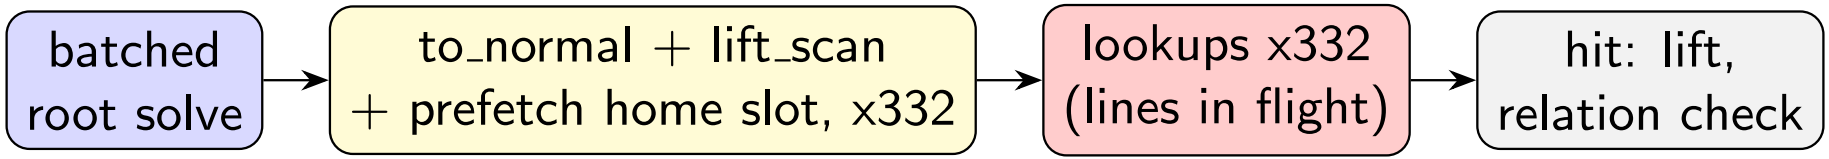

Same probe counter, lookup, lift, relation check and first-hit return: probes, relation and scalar are pC's.
Extra work: only the keys after the successful probe in the final state (at most 4n - 1 canonicalizations).