
Native worksheet execution: EXP-ECDLP-5a293e

Descriptive finite worksheet observations only; no hypothesis verdict, asymptotic claim or deployed-curve result.

Hypothesis H-ECDLP-78a3d1; goal GOAL-ECDLP-001. Requested 2 trials.

Run — Native status — Driver wall seconds — CPU seconds — RSS bytes
RUN-ECDLP-113f49 — output_validated — 1.4692843020002329 — 0.5924619999999999 — 55091200
RUN-ECDLP-8c3ce8 — output_validated — 2.0442457720000675 — 0.8090309999999998 — 55091200

All values are recorded unless expressly labeled derived. Native elapsed is derived as finished_at minus started_at. Driver wall/CPU/RSS use each manifest's explicit boundaries, retained in report-data.json; RSS is a lifetime per-process peak, not aggregate memory. These deterministic route observations have one datum each, no sampled uncertainty or performance inference. No random draw is introduced; null seed and curve_id remain as recorded. A finite worksheet witness is not a formal, decomposition or discrete-log certificate.

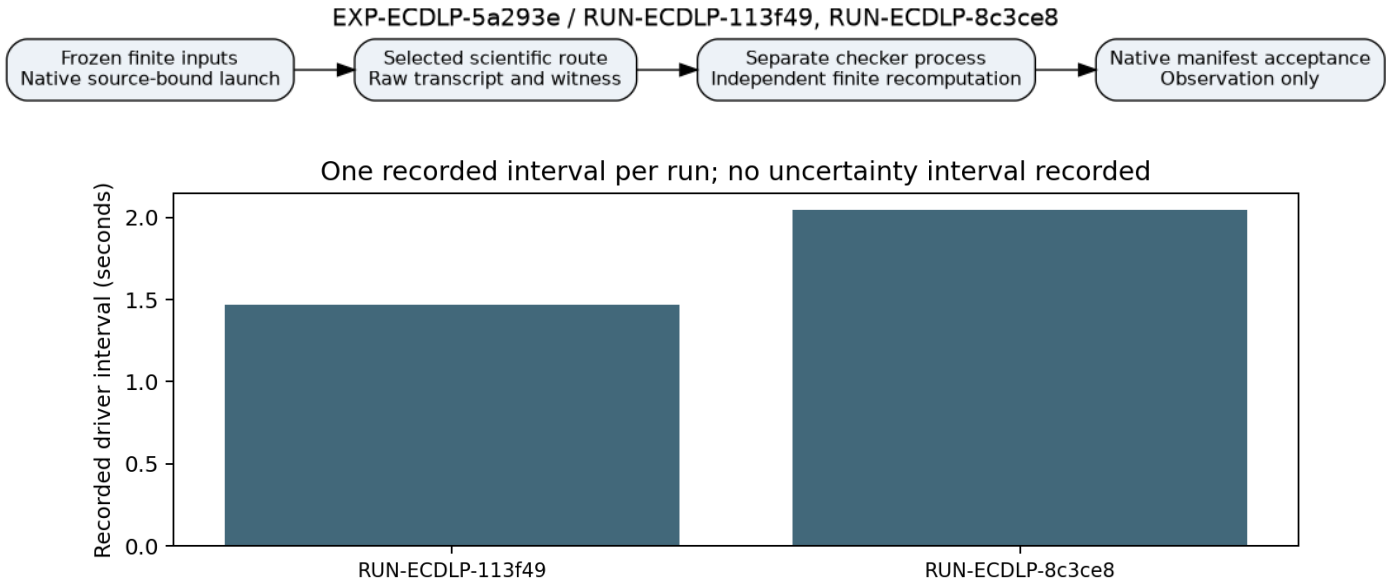

Canonical graph scope checked: knowledge/frontiers/ecdlp and the frozen specification. These finite records do not change a scientific status or graph. The pipeline diagram records what ran; the timing plot, where present, plots recorded driver intervals only and claims no speedup.

Complete commands, controls, parameters, code/dirty/environment identities, exact source hashes and raw publication commits are retained in report-data.json and the linked raw runs. Missing data remain null. No result of a control gate is promoted to a hypothesis verdict.

Recorded scalar metrics


```
[
  {
    "run_id": "RUN-ECDLP-113f49",
    "scalar_metrics": {
      "affine_point_count": 17,
      "all_y_zero_points_included": true,
      "implementations_agree": null,
      "points_with_y_zero": 1,
      "previous": null,
      "state": "awaiting_separate_route_b",
      "x_mismatches": 0,
      "x_plus_1_mismatches": 0,
      "y_mismatches": 16
    },
    "structured_metric_fields_retained_in_report_data": [
      "prediction_comparison"
    ]
  },
  {
    "run_id": "RUN-ECDLP-8c3ce8",
    "scalar_metrics": {
      "affine_point_count": 17,
      "all_y_zero_points_included": true,
      "implementations_agree": true,
      "points_with_y_zero": 1,
      "state": "two_separate_route_runs_compared",
      "x_mismatches": 0,
      "x_plus_1_mismatches": 0,
      "y_mismatches": 16
    },
    "structured_metric_fields_retained_in_report_data": [
      "prediction_comparison",
      "previous"
    ]
  }
]
```


Structured fields are retained completely in report-data.json and report.md; no truncation or numerical inference changes the raw evidence.