
Native worksheet execution: EXP-ECDLP-911c16


Descriptive finite worksheet observations only; no hypothesis verdict, asymptotic claim or deployed-curve result.

Hypothesis H-ECDLP-208a11; goal GOAL-ECDLP-001. Requested 2 trials.

Run — Native status — Driver wall seconds — CPU seconds — RSS bytes (floating values displayed to 6 significant digits; full precision retained in report-data.json)
RUN-ECDLP-5febcb — output_validated — 1.2333 — 1.22672 — 55115776
RUN-ECDLP-cfbd49 — output_validated — 1.00597 — 1.00615 — 55115776

All values are recorded unless expressly labeled derived. Native elapsed is derived as finished_at minus started_at. Driver wall/CPU/RSS use each manifest's explicit boundaries, retained in report-data.json; RSS is a lifetime per-process peak, not aggregate memory. These deterministic route observations have one datum each, no sampled uncertainty or performance inference. No random draw is introduced; null seed and curve_id remain as recorded. A finite worksheet witness is not a formal, decomposition or discrete-log certificate.



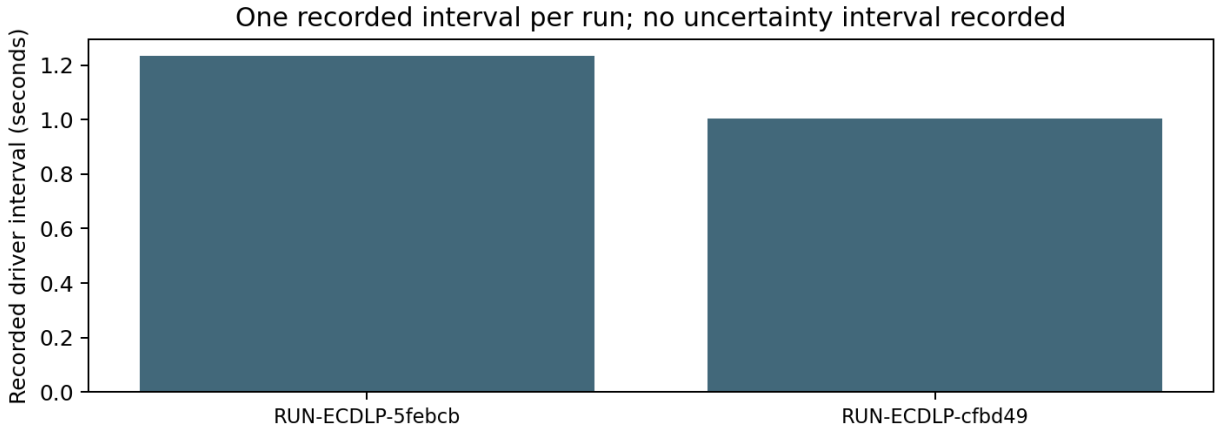

Canonical graph scope checked: knowledge/frontiers/ecdlp and the frozen specification. These finite records do not change a scientific status or graph. The pipeline diagram records what ran; the timing plot, where present, plots recorded driver intervals only and claims no speedup.

Complete commands, controls, parameters, code/dirty/environment identities, exact source hashes and raw publication commits are retained in report-data.json and the linked raw runs. Missing data remain null. No result of a control gate is promoted to a hypothesis verdict.

Recorded scalar metrics


```
[
  {
    "run_id": "RUN-ECDLP-5febcb",
    "scalar_metrics": {
      "bad_label": "does_not_suffice",
      "bad_ratio": "1/2",
      "bad_remaining": "0/1",
      "good_ratio": "1/8",
      "good_remaining": "3/4",
      "implementations_agree": null,
      "numeric_bad_off": "1/1",
      "numeric_good_off": "1/4",
      "numeric_lower": "2/1",
      "numeric_matches_symbolic": true,
      "previous": null,
      "state": "awaiting_separate_route_b"
    },
    "structured_metric_fields_retained_in_report_data": [
      "prediction_comparison"
    ]
  },
  {
    "run_id": "RUN-ECDLP-cfbd49",
    "scalar_metrics": {
      "bad_label": "does_not_suffice",
      "bad_ratio": "1/2",
      "bad_remaining": "0/1",
      "good_ratio": "1/8",
      "good_remaining": "3/4",
      "implementations_agree": true,
      "numeric_bad_off": "1/1",
      "numeric_good_off": "1/4",
      "numeric_lower": "2/1",
      "numeric_matches_symbolic": true,
      "state": "two_separate_route_runs_compared"
    },
    "structured_metric_fields_retained_in_report_data": [
      "prediction_comparison",
      "previous"
    ]
  }
]
```


Structured fields are retained completely in report-data.json and report.md; no truncation or numerical inference changes the raw evidence.