EXP-FROB-c3bc90 execution report

Observation-only record for `RUN-FROB-671844` (**frob-trace-gap**).

Scope and disposition

The supervisor admitted the frozen successor plan in the pinned container, but the implementation exited with `infrastructure_error` before producing a scientific artifact. The supervisor creates the designated run directory; `implementation/run.py` then calls `mkdir(parents: true, exist_ok: false)` on that same directory and raises `FileExistsError`. The checker was not reached. This is an execution impediment, not a conclusion about the trace-gap hypothesis.

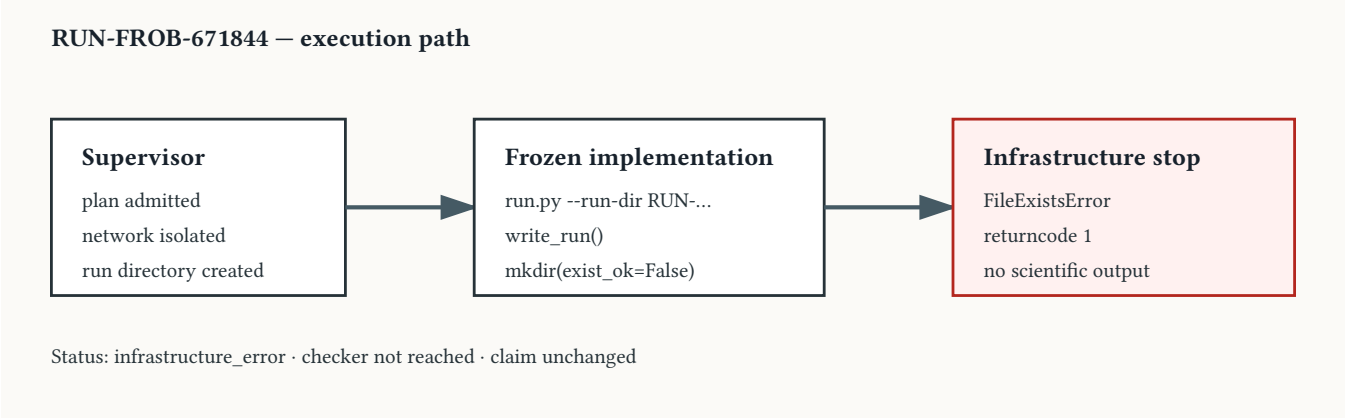

Frozen inputs and custody

- Experiment: `EXP-FROB-c3bc90`; trial: `frob-trace-gap`; run: `RUN-FROB-671844`.
- Successor plan SHA-256: `18f42381d8e177d7a1f263a0d71fcdfa1ae0e0900ab8cc1da28b2e4baf6be795`.
- Execution checkout commit: `9c82d27a6642fdf27fb1b0de93ff8c954b6a54e6`.
- Dispatch-plan SHA-256: `a49e06fc0cc539823a3dcf5451b3635ec1567442e2cc41803894f34ed05c708a`.
- Owner and lease: `executor-frob-c3bc90`, epoch `1`.
- Container: `crypto-ci-python:20261008`; network disabled; virtual-memory ceiling 512 MiB.
- Receipt: `returncode: 1`; checker: not reached; status: `infrastructure_error`.

Recorded observation

The only recorded execution observation is the implementation exception:

```
FileExistsError: [Errno 17] run directory already exists
```

No raw result, reading, manifest, or checker result was produced. The supervisor receipt, launch record, command, environment, stdout/stderr, and checker logs remain under the run directory.

Interpretation boundary

This attempt establishes only that the current supervisor/implementation pair does not admit this frozen run because both layers create the designated run directory. It does not test the mathematical mechanism, trace proportions, null comparison, or any ECDLP claim. A future attempt requires a Coordinator approved correction or successor implementation that preserves the frozen scientific inputs and run identity while making the execution contract compatible.