P37 source-base transport through edge 256

Observation-only implementation control, 2026-10-22. No relation targets were collected.

Exact input and output

P37 over $F_{81640512137}$, prime group order 81640511861. Source model $y^2 = x^3 + 46677163888x + 11713815639$; 1,600 x-orbits and 3,200 signed base points. The archived walk has 256 degree-7 edges. The valid run resumed from edge 28 and wrote edges 29–256 under Conductor task T-4626. The terminal canonical model has $a = 56138620881$, $b = 30636729625$, $j = 15565187709$. Terminal checkpoint SHA-256: `03da8071ed1639204ee415496361755855e4a3db72fa2781fc9135e5ad0aa262`.

Recorded observations

Producer: 228 new checkpoints, 182.51 s wall, 372,129,792 bytes maximum RSS. Independent verifier: pass, 256 edges, 819,200 signed-base point images replayed, 9.94 s wall. The first lease attempt went stale; its 129 uncommitted checkpoints and logs were preserved separately and excluded from the valid chain. These timings describe path preparation on this host and make no ECDLP-cost comparison.

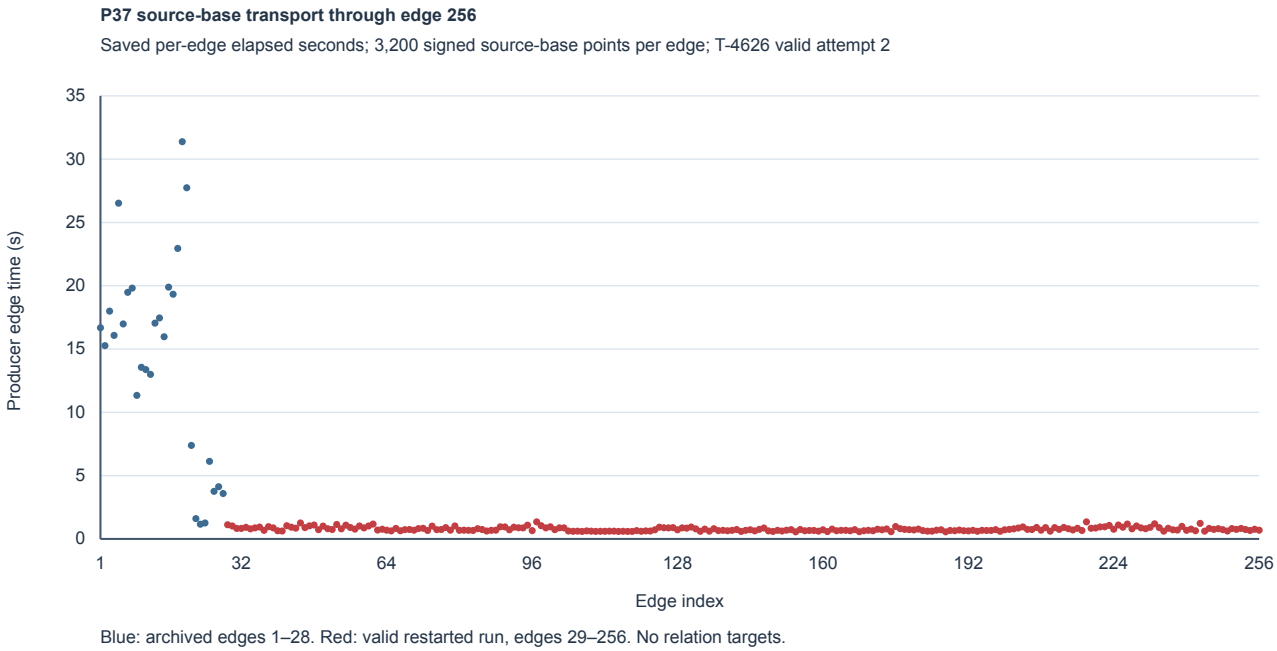


Figure 1: Saved producer time per edge, in seconds. Blue: earlier archived edges 1–28. Red: valid restarted edges 29–256. Task T-4626.

Remaining work

The map chain is checked under independent arithmetic replay. Native factor bases, fixed targetwise relations, useful rank, and full same-point ECDLP costs remain to be measured by an admitted experiment. Exact commands, hashes, failed-attempt record, and raw logs are in the accompanying Markdown report.