
P-192 degree 50,341: terminal replay profile

EXP-ISOU-32a530 / RUN-ISOU-93b2b3 / GOAL-ISOU-f30a07

Descriptive run report only. This records a completed operational attempt and its censored mathematical verification; it makes no evidence-review decision or frontier promotion.

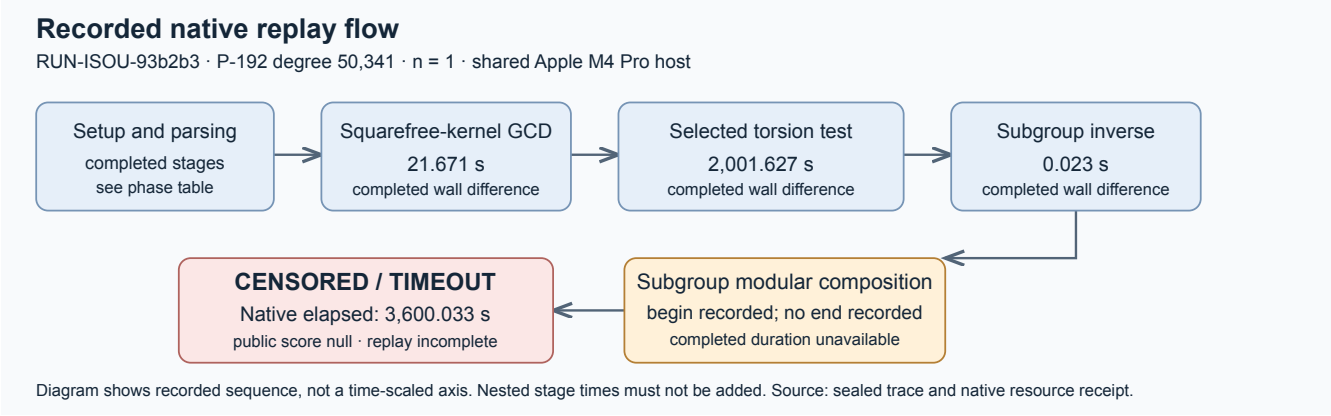

Attempt and native result

One requested replay, one started, one timed out, zero completed verifications; no scientific rerun. Native public status CENSORED, reason TIMEOUT, score null. Native worker elapsed 3,600,033 ms; worker exit code unavailable after termination. Public judge exit 3; thin adapter exit 0 acknowledges observation delivery. Start 2026-10-16 09:12:21 UTC; terminal 10:12:21 UTC. Hypothesis ID is null: this is instrumentation of a sealed map.

OS real, measured	3,600.05 s	OS user, measured	1,716.81 s
OS system, measured	62.75 s	CPU user + system, derived	1,779.56 s
Sampled worker peak RSS	250,052,608 bytes	Unavailable RSS samples	0
Worker sampled RSS limit	8,589,934,592 bytes	Sampling / monitor grace	25 / 100 ms

CPU covers the public native judge and waited descendants; it excludes compilation, orchestration and historical attempts. Shared Apple M4 Pro, 14 logical CPUs, 48 GiB RAM, Darwin arm64/macOS 26.6; launch load averages 41.25 / 44.40 / 45.45. These observations do not establish an isolated-host performance ratio.

Completed trace stages and missing terminal data

Stage	Wall difference	Recorded state
Setup: loading / field parsing	5 / 1 ms	end / end
Registry / source subgroup	10 / 0 ms	end / end
Coefficient parsing / kernel degree	32 / 0 ms	end / end
Squarefree-kernel GCD	21,671 ms	end
Selected division-polynomial torsion	2,001,627 ms	end
Subgroup inverse	23 ms	end
Subgroup modular composition	unavailable	begin only

Differences are derived as each recorded end timestamp minus its matching begin timestamp. Resolution is milliseconds; 0 ms does not imply no work. Total, attempt, map and kernel-validation parent stages also lack ends. The trace contains 23 parseable records, zero parse errors and zero terminal trace records. Parent stages nest; do not sum overlapping values. No final point/map admission is available.

Identity, custody and controls

The sealed P-192 map contains one of two constructor-reported Frobenius eigenlines (PARTIAL coverage). Source and claimed codomain are identified by ICV1 slugs ending 52e4af59 and 0af73cab respectively; their complete field/equation identities are in report.md and the sealed map. Constructor self-checks remain distinct from this unfinished independent replay. Inputs were reused without regeneration.

Source commit: e82d80feaf82d3730576ccd9137911b336f9dab8; dirty=false.
Executable SHA256: b3cbd6ac5d457a0f6d6398d1fcefc408f627e60be52c81c9009406486b61587b
Map SHA256: 82e3951488c793c5901ecf1dfeb3ab072b7cda16730899330df7caa9832a170c
Raw archive SHA256: 55c1c18440109a8c1e87c266a67e6d366cbfd64c988a86b5e52ff528126be0ae

Inputs, snapshots and executable retained expected hashes. The 3,594,206-byte raw archive preserves 21 original files, per-file hashes and the metadata-only collector. All 8 released artifacts and 21 raw hashes were rechecked. Preparation controls: 94 passed, 0 failed; 1 helper definition ignored but invoked by its parent. No controls rerun here. Served model/effort unexposed. One observation: spread unavailable; diagram used because fewer than two comparable trials completed. Full commands, identities, original status-field differences and build receipts: report.md.