# Native worksheet execution: EXP-ECDLP-524b38


Descriptive finite worksheet observations only; no hypothesis verdict, asymptotic claim or deployed-curve result.

Source experiment: EXP-ECDLP-efafc0. Original approved frozen finite worksheet. These deterministic readings remain historical in-sample calibration; no ambiguous original criterion is closed or re-scored. Complete lineage hashes remain in report-data.json.

Hypothesis H-ECDLP-db6960; goal GOAL-ECDLP-001. Requested 2 trials.

Run — Native status — Driver wall seconds — CPU seconds — RSS bytes (floating values displayed to 6 significant digits; full precision retained in report-data.json)
RUN-ECDLP-762d8c — output_validated — 7.65877 — 6.77765 — 169000960
RUN-ECDLP-b80f30 — output_validated — 6.95291 — 6.2526 — 169000960

All values are recorded unless expressly labeled derived. Native elapsed is derived as finished_at minus started_at. Driver wall/CPU/RSS use each manifest's explicit boundaries, retained in report-data.json; RSS is a lifetime per-process peak, not aggregate memory. These deterministic route observations have one datum each, no sampled uncertainty or performance inference. No random draw is introduced; null seed and curve_id remain as recorded. A finite worksheet witness is not a formal, decomposition or discrete-log certificate. The authorized outer supervisor environment sets GIT_CONFIG_COUNT=1, GIT_CONFIG_KEY_0=core.preloadIndex and GIT_CONFIG_VALUE_0=false under DEC-20261018-1a5209; exact direct child argv and resource limits are unchanged. The exact outer command style is retained in report-data.json.

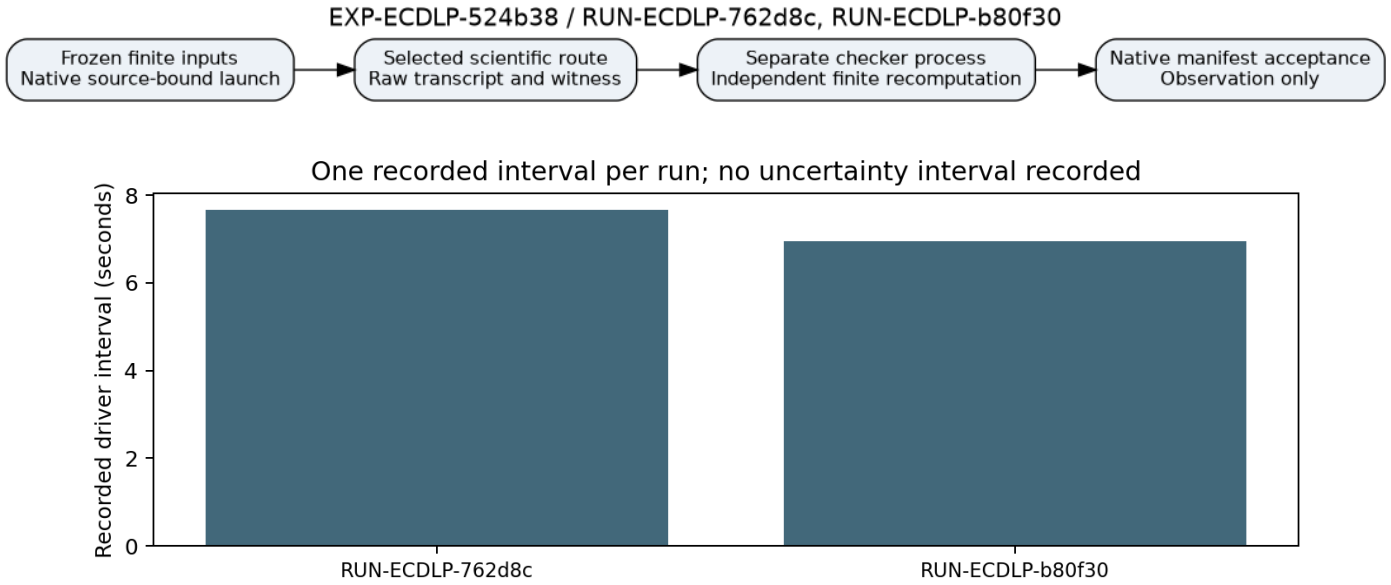


Canonical graph scope checked: knowledge/frontiers/ecdlp and the frozen specification. These finite records do not change a scientific status or graph. The pipeline diagram records what ran; the timing plot, where present, plots recorded driver intervals only and claims no speedup.

Complete commands, controls, parameters, code/dirty/environment identities, exact source hashes and raw publication commits are retained in report-data.json and the linked raw runs. Missing data remain null. No result of a control gate is promoted to a hypothesis verdict.

## Recorded scalar metrics


```
[
  {
    "observed_scalar_fields": {
      "chord_collinear": false,
      "control_collinear": false,
      "slope": 0
    },
    "run_id": "RUN-ECDLP-762d8c",
    "scalar_metrics": {
      "implementations_agree": true,
      "measurement_valid": true,
      "prediction_match": false
    },
    "structured_metric_fields_retained_in_report_data": [
      "observations"
    ]
  },
  {
    "observed_scalar_fields": {
      "chord_collinear": false,
      "control_collinear": false,
      "slope": 0
    },
    "run_id": "RUN-ECDLP-b80f30",
    "scalar_metrics": {
      "implementations_agree": true,
      "measurement_valid": true,
      "prediction_match": false
    },
    "structured_metric_fields_retained_in_report_data": [
      "observations"
    ]
  }
]
```


Structured fields are retained completely in report-data.json and report.md; no truncation or numerical inference changes the raw evidence.