Native worksheet execution: EXP-ECDLP-c64491


Descriptive finite worksheet observations only; no hypothesis verdict, asymptotic claim or deployed-curve result.

Source experiment: EXP-ECDLP-d68ac9. Original approved frozen finite worksheet. These deterministic readings remain historical in-sample calibration; no ambiguous original criterion is closed or re-scored. Complete lineage hashes remain in report-data.json.

Hypothesis H-ECDLP-298630; goal GOAL-ECDLP-001. Requested 2 trials.

Run — Native status — Driver wall seconds — CPU seconds — RSS bytes (floating values displayed to 6 significant digits; full precision retained in report-data.json)
RUN-ECDLP-40541f — output_validated — 8.04096 — 7.26356 — 169009152
RUN-ECDLP-fce7f4 — output_validated — 8.97212 — 7.89497 — 169017344

All values are recorded unless expressly labeled derived. Native elapsed is derived as finished_at minus started_at. Driver wall/CPU/RSS use each manifest's explicit boundaries, retained in report-data.json; RSS is a lifetime per-process peak, not aggregate memory. These deterministic route observations have one datum each, no sampled uncertainty or performance inference. No random draw is introduced; null seed and curve_id remain as recorded. A finite worksheet witness is not a formal, decomposition or discrete-log certificate. The authorized outer supervisor environment sets GIT_CONFIG_COUNT=1, GIT_CONFIG_KEY_0=core.preloadIndex and GIT_CONFIG_VALUE_0=false under DEC-20261018-1a5209; exact direct child argv and resource limits are unchanged. The exact outer command style is retained in report-data.json.

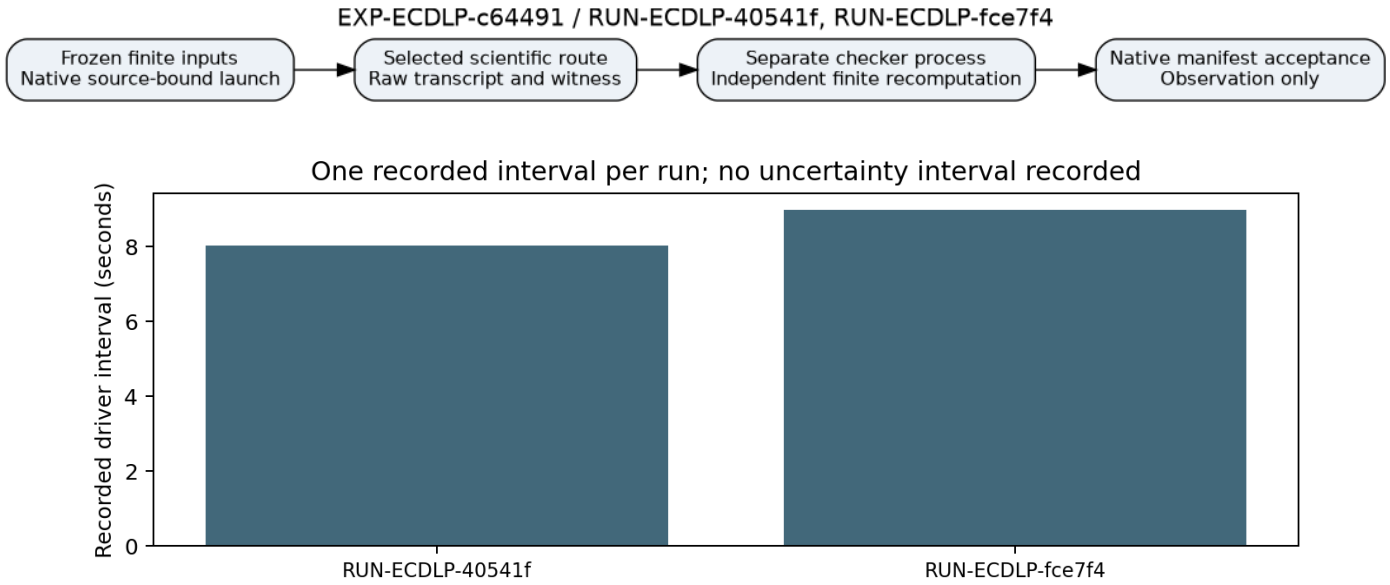

Canonical graph scope checked: knowledge/frontiers/ecdlp and the frozen specification. These finite records do not change a scientific status or graph. The pipeline diagram records what ran; the timing plot, where present, plots recorded driver intervals only and claims no speedup.

Complete commands, controls, parameters, code/dirty/environment identities, exact source hashes and raw publication commits are retained in report-data.json and the linked raw runs. Missing data remain null. No result of a control gate is promoted to a hypothesis verdict.

Recorded scalar metrics


```
[
  {
    "observed_scalar_fields": {
      "ceiling": 36,
      "escape_fraction": "1/8",
      "j": 72,
      "pair_sum_23": 28,
      "pair_sum_5": 36,
      "point_count": 167,
      "point_on_curve": true,
      "point_order": 167,
      "residue_1728": 67,
      "shortfall": 8
    },
    "run_id": "RUN-ECDLP-40541f",
    "scalar_metrics": {
      "implementations_agree": true,
      "measurement_valid": true,
      "prediction_match": true
    },
    "structured_metric_fields_retained_in_report_data": [
      "observations"
    ]
  },
  {
    "observed_scalar_fields": {
      "ceiling": 36,
      "escape_fraction": "1/8",
      "j": 72,
      "pair_sum_23": 28,
      "pair_sum_5": 36,
      "point_count": 167,
      "point_on_curve": true,
      "point_order": 167,
      "residue_1728": 67,
      "shortfall": 8
    },
    "run_id": "RUN-ECDLP-fce7f4",
    "scalar_metrics": {
      "implementations_agree": true,
      "measurement_valid": true,
      "prediction_match": true
    },
    "structured_metric_fields_retained_in_report_data": [
      "observations"
    ]
  }
]
```


Structured fields are retained completely in report-data.json and report.md; no truncation or numerical inference changes the raw evidence.