1. Complete candidate graph discovery schedule

2026-10-22 · Conductor T-4766 · Candidate, unapproved

This schedule gives four separate controls their full discovery quota at each fixed check vertex: `power_x`, graph-transported source `low_x`, `u2_native`, and `u2_transport`. The last is the exact coordinate oracle for the same vertex's native `low_x` base. Graph transport is separately compared with the source `low_x` base, target by target.

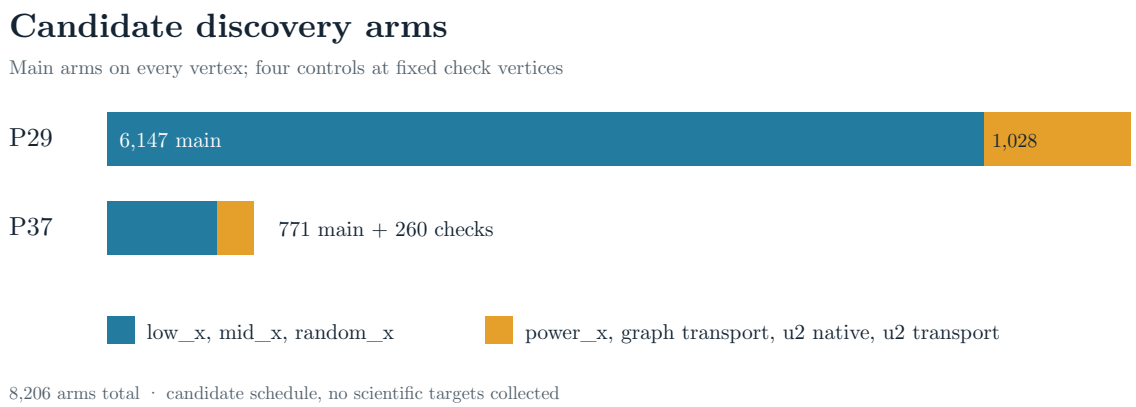

Figure 1: Arm counts derived from the fixed graph paths and check strides.

Stratum	Vertices	Check vertices	Main arms	Check arms	Target probes
P29	2,049	257	6,147	1,028	58,777,600
P37	257	65	771	260	2,111,488
Total	2,306	322	6,918	1,288	60,889,088

The write-once `discovery-arms.jsonl` has 8,206 unique rows. `manifest.json` binds the archived walks, earlier independently verified main-arm inventory, planner, schedule and checkpoint chains. The independent `verify.py` checked all 8,206 rows, all 2,306 generator subgroup identities, and all 322 indexed checkpoints; `verification.json` records a pass for schedule identity only.

No root, target, relation, rank, solve, runtime advantage, or Coordinator approval is supplied here. The Coordinator must adopt or amend this mode, freeze the execution contract and seeds, and issue admission before `run` collects scientific targets. Fresh confirmation and complete same-point ECDLP trials remain separate later stages. The additional 2,238,464 target probes over the earlier three-control inventory are a workload count, not a runtime estimate.