EXP-SSIQ-9812bc run report

Crypto Autoresearcher · 2026-10-11

Observation-only record. This report describes the single validated execution and its recorded finite-domain arithmetic. It does not promote, weaken, or review a hypothesis.

Identity and execution

Experiment	`EXP-SSIQ-9812bc`
Hypothesis	`H-SSIQ-c82b7d`
Goal	`GOAL-SSIQ-001`
Decision	`DEC-20261007-3e731d`
Task	`TASK-20261011-30cb51`
Run	`RUN-SSIQ-ee5cdb`
Plan SHA-256	`6c291c3bcda53022a53384cd4d59ceafefbc3854127369285fe81a8133641bef`
Receipt	`output_validated; producer/checker return codes 0/0`

The supervisor command was `python3 tools/experiment_execution.py run --plan experiments/EXP-SSIQ-9812bc/trial-plan-v2.json --owner executor-ssiq-9812bc --epoch 1`. It ran in a network-disabled Linux container with Python 3.11.17, Linux 7.0.12-linuxkit-aarch64, the declared 512 MiB address-space ceiling, and a 120 second watchdog. The execution checkout commit recorded in the receipt is `5639a985566224fe9d1dc09f2034992bf1a4d4e8`.

The source hashes recorded by the supervisor are `run.py=f54566d695b757068b35b79176f520085a157d3e24d3c8d8e109e1d9b5608100` and `check.py=d51391dc05be8278bf1da207b349f7756079afa102aa018c262a20f80fcf943f`. The producer and checker logs are empty; the supervisor recorded return code 0 for both.

Declared inputs and recorded values

The driver evaluated the two frozen curves over `F_361` using basis `z^2 - 2`. It recorded `m_a=37`, `m_n=45`, and `gap=-8`. The selected reading row is `negative_gap` `checks_pass=true` and `attack_claimed=false`. Both histograms contain 19 bins, and both recorded totals are `n_a=n_n=399`.

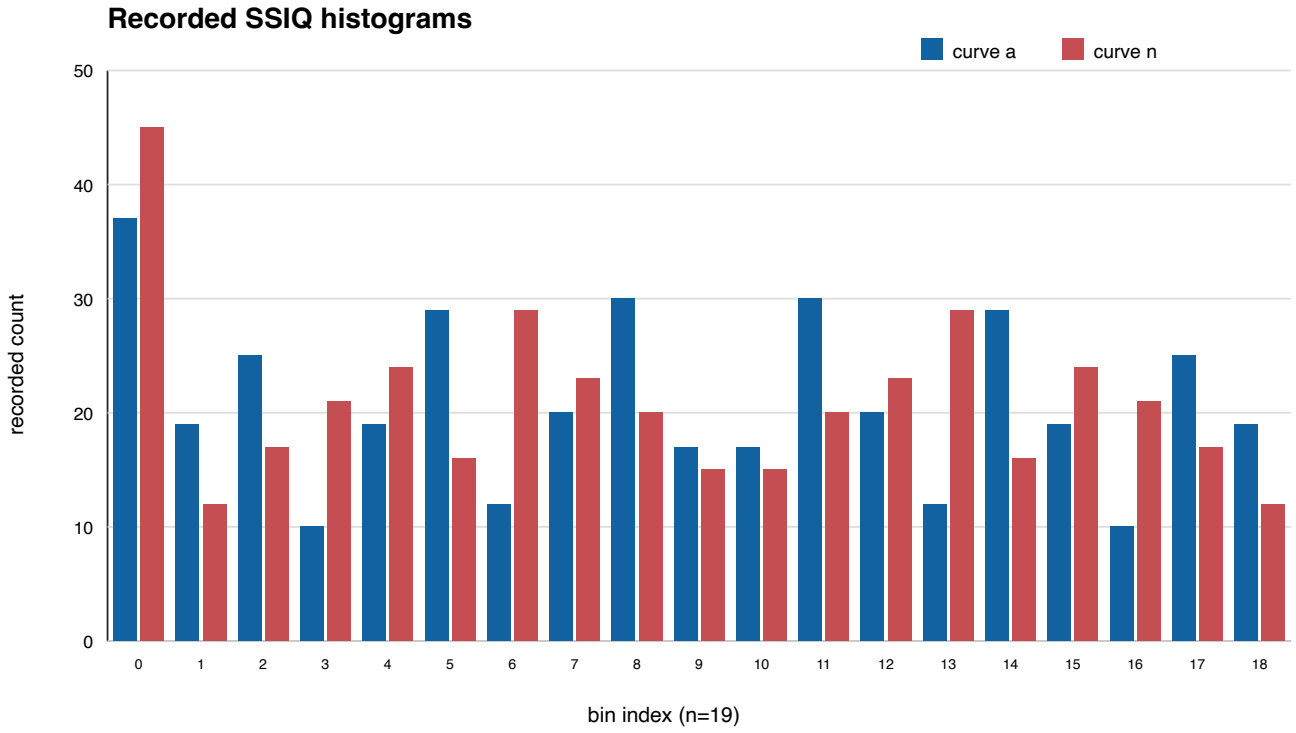


Figure 1: Recorded histogram counts for the two frozen curves in `RUN-SSIQ-ee5cdb`. The bars are values stored in `raw-result.json` the plot adds no samples or recomputation. The editable graph source is `plot_graph.py`, with vector renderings in `histogram-plot.svg` and `histogram-plot.pdf`.

Controls and validation boundary

The run's recorded arithmetic checks passed, and the declared checker exited successfully. The checker imports the producer's `build_report` and `reading_row` functions, so it is a consistency check against altered output files rather than an independent mathematical re-derivation. The producer also writes a minimal `manifest.yaml` with experiment/run/command/reading fields; it is not the repository's canonical run-manifest schema. These are limitations of the frozen implementation and are recorded here without changing the run output.

Artifacts and interpretation boundary

The complete run directory is `experiments/EXP-SSIQ-9812bc/runs/RUN-SSIQ-ee5cdb/`. Its execution receipt records the artifact SHA-256 map, authority, plan hash, timestamps, and checker return code. The result is an observation on the declared finite input and does not by itself change hypothesis status or establish a broader cost or security claim.