1. SSIQ supervisor infrastructure report

This is an observation-only report for `EXP-SSIQ-dcb6d6`. It records the execution boundary reached by `RUN-SSIQ-9fe433`; it does not assign scientific meaning to the failure and does not change the experiment or hypothesis state.

1.1. Identity and provenance

- **Experiment:** `EXP-SSIQ-dcb6d6`
- **Hypothesis:** `H-SSIQ-4baf2b`
- **Goal:** `GOAL-SSIQ-001`
- **Task:** `TASK-20261011-25a161`
- **Trial:** `geometric-kernel-census`
- **Run:** `RUN-SSIQ-9fe433`
- **Plan:** `experiments/EXP-SSIQ-dcb6d6/trial-plan-d9e39a.json`
- **Plan SHA-256:** `408c5e1eab449f4aade52c4ca9210de7be4be60f431380fe5f63bcc4383fb8b7`
- **Approval:** `DEC-20261010-21d5d6`
- **Authority commit:** `40b3d9ff254d420a939b71e748122375aec8aeec`
- **Run-record commit:** `71e66b14a8`

The frozen plan binds `implementation/run.py` to SHA-256 `64ae4002ba5251ec98ee71e3b2a78f0b1916ef52662e518f38bc2a2be04b9290` and `implementation/check.py` to SHA-256 `efb75b09b7916d12f421b7f486acd5401c4d7e4009234a49234875b475aa3923`.

1.2. Recorded execution

The supervisor created its run envelope and then failed in the child-process pre-execution hook. The receipt records:

Item	Value
Status	`infrastructure_error`
Detail	`Exception occurred in preexec_fn.`
Start	`2026-10-11T17:45:13.907789+00:00`
Finish	`2026-10-11T17:45:13.914642+00:00`
Return code	`null`
Checker return code	`null`
Published by supervisor	`false`
Scientific producer output	none
Independent checker	not started

The recorded environment is macOS (`darwin`) with Python 3.13.1. The plan requested a 4096 MiB per-trial memory limit and a 1800 second watchdog. The failure occurred before Sage, the producer, or the checker ran; therefore no kernel counts, closure rows, timings, or reading were produced.

1.3. Artifact boundary

Present in the run directory are `command.txt`, `environment.json`, `execution-receipt.json`, `launch.json`, `stdout.log`, `stderr.log`, `check.stdout.log`, and `check.stderr.log`. The declared scientific artifacts `manifest.yaml` and `raw-result.json` are absent, consistently with the pre-execution failure. The empty logs are retained exactly.

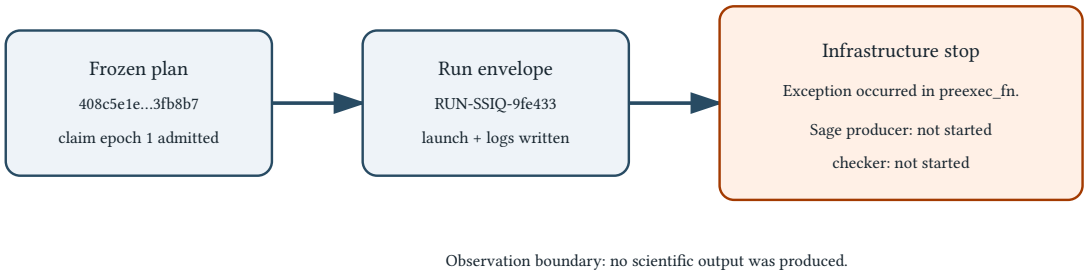

Figure 1: Recorded execution path for `RUN-SSIQ-9fe433`; the run stopped at the platform pre-execution guard.

The diagram is an execution-boundary record, not a quantitative result.

1.4. Reproduction boundary

The consumed run ID is not retried. Any repair of the macOS supervisor/runtime compatibility must be additive and use a new approved plan and a new run ID. The Linux-container attempt made before this host receipt also did not reach the producer because that image invocation lacked the required `git` command; it is not combined with this run record.

Run evidence: `experiments/EXP-SSIQ-dcb6d6/runs/RUN-SSIQ-9fe433/`.