EXP-FROB-ad6a6d — run observation report

RUN-FROB-026551 · 2026-10-11 18:04 UTC

Observations only. The supervisor created the run envelope and stopped in the child-process pre-execution hook. The producer and checker did not execute, so no field or chord-image values were measured.

Bound execution

Field	Recorded value
Goal	`GOAL-FROB-6333a9`
Experiment	`EXP-FROB-ad6a6d`
Plan	`trial-plan-v2.json`, SHA-256 `05f75ed5…`
Correction	`CORR-20261011-954734`
Task / epoch	`TASK-20261011-afcf52` / `1`
Run	`RUN-FROB-026551`
Host	Darwin; Python 3.12.8
Elapsed wall time	0.012 seconds from recorded timestamps

Exact execution boundary

The producer command was `python3 experiments/EXP-FROB-ad6a6d/implementation/run.py --run-dir experiments/EXP-FROB-ad6a6d/runs/RUN-FROB-026551`. The planned checker was `python3 experiments/EXP-FROB-ad6a6d/implementation/check.py experiments/EXP-FROB-ad6a6d/runs/RUN-FROB-026551`.

The sealed receipt records `status = infrastructure_error`, `detail = Exception occurred in preexec_fn.`, and null producer and checker return codes. All four logs are empty. `manifest.yaml`, `raw-result.json`, and `reading.yaml` were not created. The F_7^3 construction and slope-image comparison were not reached.

Visual record

There were zero comparable recorded values, so the visual is an execution-boundary diagram rather than a numerical graph.

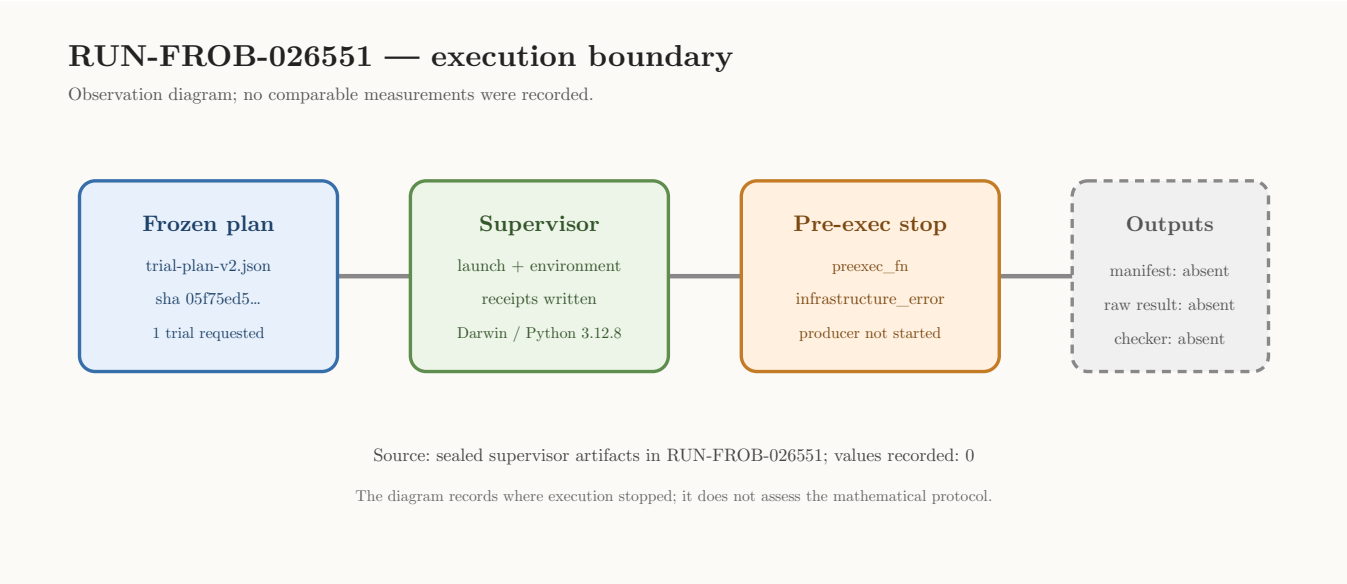

Figure 1: Execution boundary for `RUN-FROB-026551`; source data: `graph-data.json` and sealed run artifacts. Recorded comparable values: 0.

Limitations

This report records an operational stop only. It makes no mathematical inference and does not change any research state. The predecessor plan and pointer queue were not edited.