First check-vertex targetwise count control

16 October 2026 | Conductor T-3387 | public implementation control

This report records observations only. It makes no relation-yield advantage, ECDLP-cost, or hypothesis-status decision. The full report, commands, source hashes, inputs and raw logs are in `report.md` and this directory.


Fixed workload

P29 uses 512 signed source-base points transported through degree-7 edge 8; P37 uses 3,200 through edge 4. Each source/destination pair receives the same 128 deterministic public coefficient labels. The pair of prepared inputs in each stratum was built from independently replayed graph checkpoints. The separate C++ ordered-count oracle then enumerated every base-point pair and probed each target. Source code commit: `90f5ac1c94`; run revision: `94efd47f02ff21671b895d561876e06c81fee8d2`.

Recorded counts

Endpoint	Targets	Nonempty	Ordered relations
P29 source	128	15	90
P29 edge 8	128	15	90
P37 source	128	7	48
P37 edge 4	128	7	48

The P29 source/destination count files have identical SHA-256 `d7c0e65b...fae55`; the P37 files have identical SHA-256 `f799d1cd...4d473`. Every target count matches, including zeros. These 128 fixed labels are control points and are excluded from the later discovery sample.

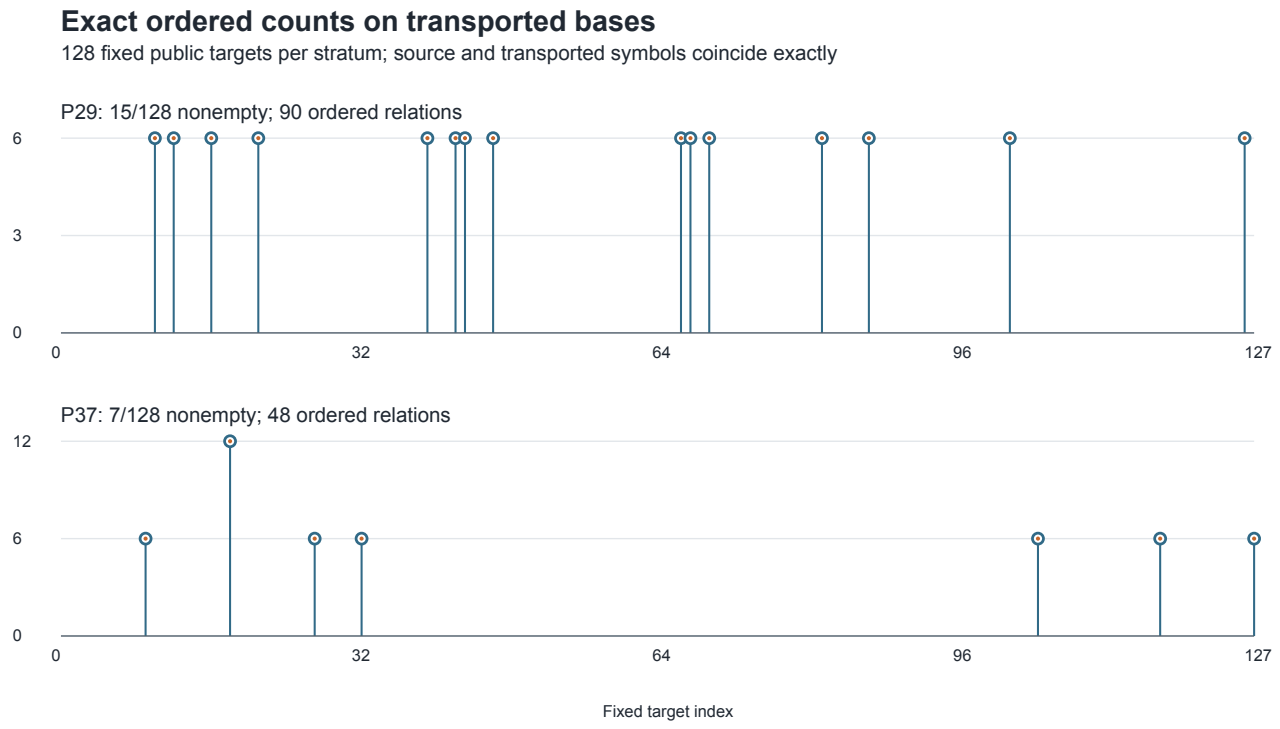

Resources and limits

The four counter processes exited zero. Native `time -l` reported P29 source/destination wall times 1.19/1.08 s and maximum RSS about 9 MB; P37 wall times 66.11/79.38 s and maximum RSS about 288 MB. P37 CPU user+system was 3.29/4.27 s. The wall/CPU gap lacks a load trace or repeats, so it is diagnostic only. A 300-second process watchdog was applied; no memory kill guard was installed. Exact native logs are retained.

The graph-wide protocol remains a draft. Full-path transport, committed discovery targets, native base comparison, rank, same-point solves and matched rho remain separate requirements. The prior graph diagrams were checked and remain accurate for path geometry; this figure carries the new count data.