Observation-only run report: EXP-CSIDH-999626

Scope. This report records the outputs of the frozen Stage 0–1 successor. It is observation-only: it assigns no evidence strength, promotes no claim, and changes no hypothesis or experiment status.

Identity and runtime

Experiment `EXP-CSIDH-999626`; hypothesis `H-CSIDH-73e6ab`; goal `GOAL-CSIDH-001`; task `TASK-20261011-883597`; plan SHA-256 `e4336c1437525dbc02b53a3680ab13336a084a41fefae8686cca47c47dc454f8`; executor authority commit `e66fddc083cc28726282956d28de1ec7eb7ecea2`; owner/epoch `executor-csidh-999626/1`. Receipts record Linux, Python 3.11.17, and runtime-lock SHA `2e527af61020a126a4d55a2be57e7874d7633cc46e80e5e79cb723e8a60c2edd`.

The outer launch used the narrow worktree and Git-metadata mounts plus a read-only PyYAML mount. The exact command is retained in `report.md`.

Trials

Trial	Run	Start UTC	Return/check, status
`stage0-memcap-freeze`	`RUN-CSIDH-8a996d`	19:31:48.379	0/0, output validated
`stage1-memcap-census`	`RUN-CSIDH-fc6b43`	19:31:52.888	0/0, output validated

The supervisor requested two trials and validated both. It reported zero remaining trials, zero dependency waits, and zero reconciliation items. No timeout or crash was recorded.

Frozen controls and recorded values

The run used $p = 419$, disc $= -419$, $n = 4$, both enumeration routes, $M = 2$ and $M_{\text{free}} = 4$, $G \in \{1, 2\}$, the blind-control instrument, and the forced-$N = 1$ control. Stage 0 recorded `S0-FREEZE-OK`; Stage 1 recorded `O-SEPARATES`, with $N_A = N_B = 9$ and reconstruction true.

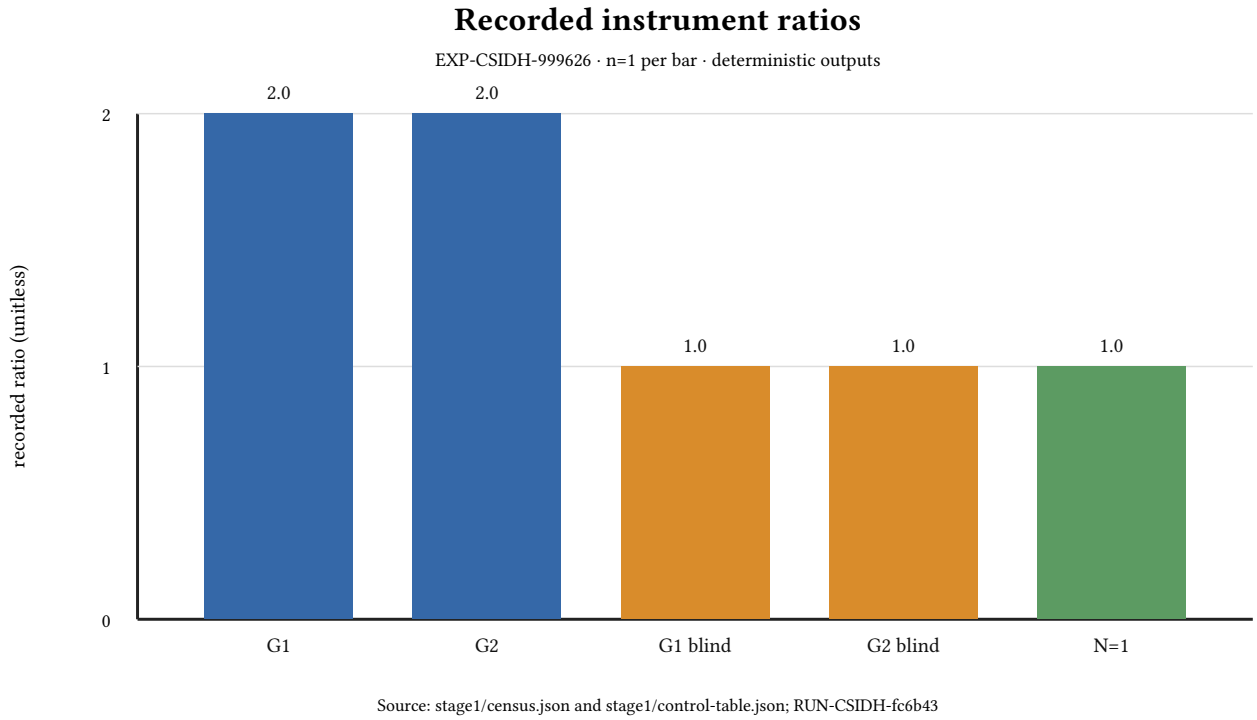

Figure 1: Recorded deterministic ratios ($n = 1$ per bar) from `RUN-CSIDH-8a996d` and `RUN-CSIDH-fc6b43`. Values are copied from stage artifacts; no new samples or uncertainty estimate was added.

The main ratios were 2.0 at both G levels; the blind ratios and forced-$N = 1$ control were 1.0. No spread, CPU-time measurement, per-stage wall-time measurement, random seed, or statistical uncertainty was recorded, so those fields remain missing.

Artifact pointers

The exact receipts, raw results, manifests, checker logs, and stage artifacts are in the two run directories named above. The editable graph data are in `graph-data.json`; the narrative and exact outer command are in `report.md`. This report does not generalize the deterministic ratios beyond the frozen tested scope.