EXP-ECTD-07b200 — run observation report

RUN-ECTD-e5714e · 2026-10-11 18:00 UTC

Observations only. The supervisor created the run envelope and stopped in the child-process pre-execution hook. The producer and checker did not execute, so no scan values or scientific controls were measured.

Bound execution

Field	Recorded value
Goal	`GOAL-ECTD-001`
Experiment	`EXP-ECTD-07b200`
Plan	`trial-plan-v2.json`, SHA-256 `203be1db…`
Correction	`CORR-20261011-9bb7aa`
Task / epoch	`TASK-20261011-358a81` / `1`
Run	`RUN-ECTD-e5714e`
Host	Darwin; Python 3.12.8
Elapsed wall time	0.018 seconds from recorded timestamps

Exact execution boundary

The producer command was `python3 experiments/EXP-ECTD-07b200/implementation/run.py --run-dir experiments/EXP-ECTD-07b200/runs/RUN-ECTD-e5714e`. The planned checker was `python3 experiments/EXP-ECTD-07b200/implementation/check.py experiments/EXP-ECTD-07b200/runs/RUN-ECTD-e5714e`.

The sealed receipt records `status = infrastructure_error`, `detail = Exception occurred in preexec_fn.`, and null producer and checker return codes. All four logs are empty. `manifest.yaml` and `raw-result.json` were not created. The finite prime limit, coefficient ranges, all-root selection, p=3 handling, and first-edge controls were not reached.

Visual record

There were zero comparable recorded values, so the visual is an execution-boundary diagram rather than a numerical graph.

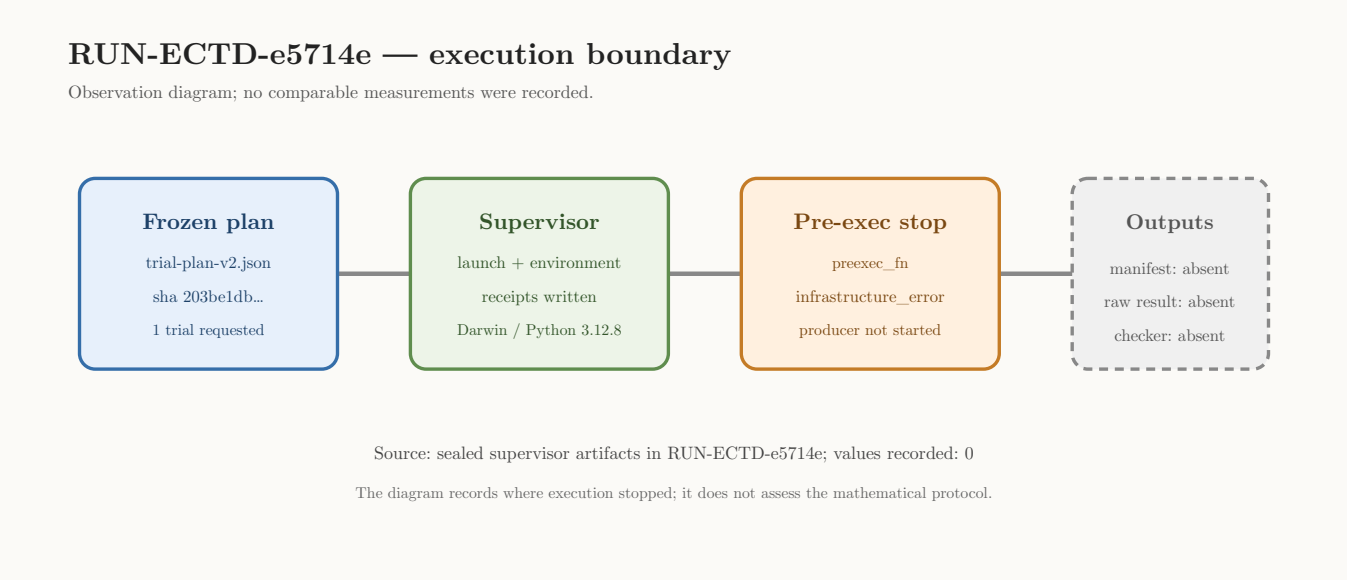

Figure 1: Execution boundary for `RUN-ECTD-e5714e`; source data: `graph-data.json` and sealed run artifacts. Recorded comparable values: 0.

Limitations

This report records an operational stop only. It makes no mathematical inference and does not change any research state. The predecessor plan and pointer queue were not edited.