1. Study-level graph admission implementation control

2026-10-23, Conductor tasks T-4830, T-4834 and T-4838. This is an executor-admission and trial-plan implementation control. It records guard behavior; it makes no relation-yield, rank or ECDLP claim and grants no Coordinator approval.

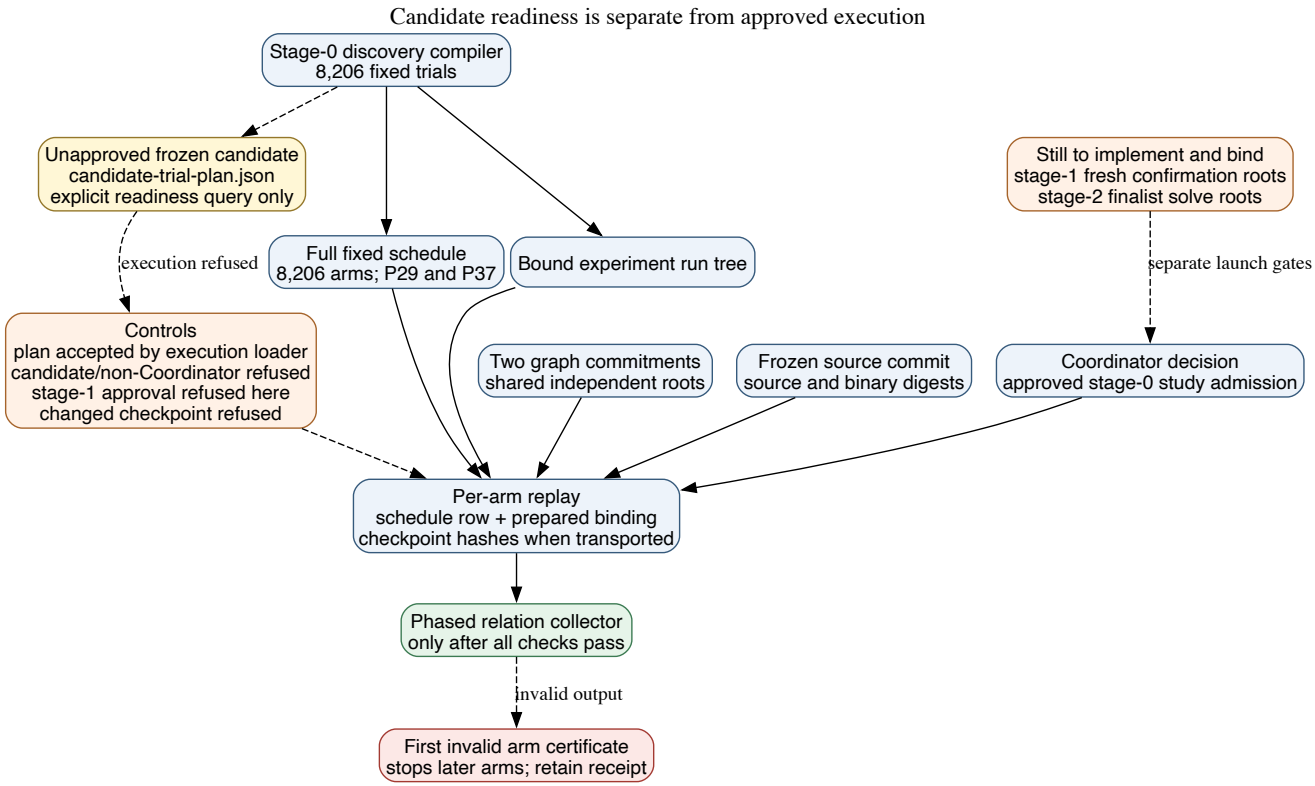

The runner now supports a single study admission binding the complete P29/P37 schedule, both graph commitments and shared roots, frozen source commit and hashes, collector binaries, and experiment output prefix. Before each arm's collector starts, the runner replays the schedule row and prepared binding. Transported-base rows also check their checkpoint, chain manifest and terminal checkpoint hashes.

Controls rejected candidate status, a non-Coordinator approver, an unknown schema, and malformed or unauthorized execution stages. A valid stage-1 approval is also refused at the discovery admission boundary; this launcher requires stage 0 until dedicated later-stage launchers exist. The trial adapter passes the prepared-arm binding to study-admitted arms, and its checker independently recomputes the admission identity and materializer binding. Three full-quota P37 vertex-zero prepared inputs continue to pass group-law replay, including rejection of a modified transport checkpoint. The new compiler emits 8,206 discovery trials; its plan passes the repository's actual execution-plan loader, including dependency ordering and source bindings. This is plan compatibility only. A second full 8,206-row candidate fixture passes the same loader in candidate-readiness mode and is refused by its default execution mode. A separate candidate-only path writes a `candidate-trial-plan.json` for a frozen, unapproved `review_required` specification. An explicit newest-experiment query reports it ready only when all rows validate; default selection omits candidates. The execution loader and public runner refuse candidate plans, and approval requires a fresh approved plan and dispatch queue. Focused tests exercise readiness and refusal. Both plan paths bind `stop_on_invalid_output: true`: the supervisor stops on the first invalid arm certificate while preserving its receipt. Timeouts and infrastructure failures retain their separate statuses.

Confirmation and finalist solve streams still need independent roots. No scientific roots, canonical frozen experiment, or relation outputs are present.