1. Prior P29 same-conductor native observations


2026-10-23. Descriptive audit of two archived arms from EXP-ECTD-0cf008. This is not an evidence review or a graph-walk measurement. Values are copied from output-validated receipts and their raw-result records. The source experiment remains incomplete.

1.1. Exact curve identities

All models use F_p, p = 320092037, subgroup order r = 320091991, and f_E = 8209. E1, the primary P29 floor, is $y^2 = x^3 + 101186781x + 57596093$, G = (0, 112219098). E2 is $y^2 = x^3 + 64570613x + 54195252$, G = (0, 5368294). E3 is $y^2 = x^3 + 234001141x + 79995391$, G = (5, 53527325).

1.2. Recorded observations

Endpoint	Run ID	Useful / attempted	Exact 99.75% interval	Rank at 512 / 2,048 / 8,192 / 32,768
E2 native	RUN-ECTD-c769f1	2,204 / 32,768	[0.063148, 0.071545]	37 / 143 / 256 / 256
E3 native	RUN-ECTD-f395a9	2,191 / 32,768	[0.062762, 0.071136]	45 / 140 / 256 / 256

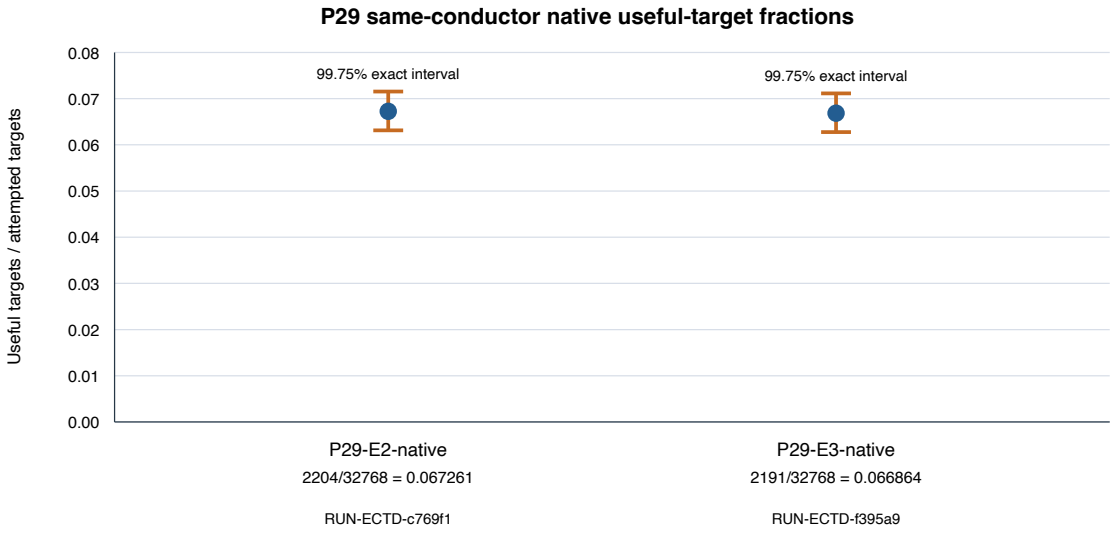

Intervals copied from the recorded exact hypergeometric results; native arms only. Source experiment remains incomplete.

The observed fractions are 0.0672607422 (E2) and 0.0668640137 (E3); their derived difference is 13/32,768 = 0.0003967285, about 0.0397 percentage points. The plotted exact intervals overlap. No equality or difference conclusion follows. Both runs report an independent ordered-count match and valid group-law replay and reached rank 256 of 256 by the 8,192-target prefix.

1.3. Target-stream audit

The source specification says endpoint arms share a target vector. I independently hashed all 32,768 ordered `(alpha, beta)` pairs in the committed native prepared inputs, excluding curve-dependent points. The streams differ, including their first coefficient pair:

Endpoint	First `(alpha, beta)` pair	Coefficient-stream SHA-256
P29 floor E1	(264673044, 279640898)	64cd3756f380…588c51ca
P29-E2	(306343046, 290671108)	80d447c67d0d…0cd3cb3c5
P29-E3	(214677491, 24330666)	2917b209cce2…be0fc7a3

The archived E2/E3 observations are marginal, not paired with E1 or each other. The graph protocol must bind and independently verify identical ordered coefficient pairs across P29 endpoints within each stage before reporting paired contrasts. Full digests and the first three pairs are in the editable report source.

Both archived E2/E3 runs bind preparer SHA-256 `7bec20e2147641539d8dfdcc0ae0009581e485462396897f0751c879e4b32fef`. That source includes `endpoint_id` in the SHA-256 draw domain for `alpha` and `beta`, which explains the separate streams and the specification mismatch. The graph preparer uses endpoint-independent `(stratum, stage)` domains, and its selector checks coefficient equality across each stratum.

1.4. Incomplete panel and graph-study scope

The E1 primary P29-floor-native run (RUN-ECTD-8231ef) failed with an infrastructure error. The E2 and E3 random arms (RUN-ECTD-d14263 and RUN-ECTD-45ca41) also failed with infrastructure errors. The registered E2/E3-to-E1 panel is incomplete.

These valid native observations are prior marginal secondary context. Their coefficient streams differ from E1 and each other; they do not use the graph study's committed target stream and do not describe graph vertices or transported bases. Fresh E2/E3 arms on the graph study's common P29 stream are required for paired same-conductor controls.

Source: [archived 20-arm run report](../../../../experiments/EXP-ECTD-0cf008/reports/run-20261016T0409Z/report.pdf). Graph implementation controls: [separate report](../report.pdf).