P29 same-conductor control schedule supplement

Status: `candidate_unapproved`. This versioned supplement retains the frozen 8,206-arm graph schedule unchanged and adds four secondary P29 controls: native `low_x` and `random_x` bases on each of P29-E2 and P29-E3, with 8,192 distinct targets per arm. Both endpoints use the graph discovery coefficient domain (`P29`, `discovery`) and the same committed base, target, and verifier roots. Target points are curve-specific; the paired (α, β) sequence is shared and was independently checked with public control roots.

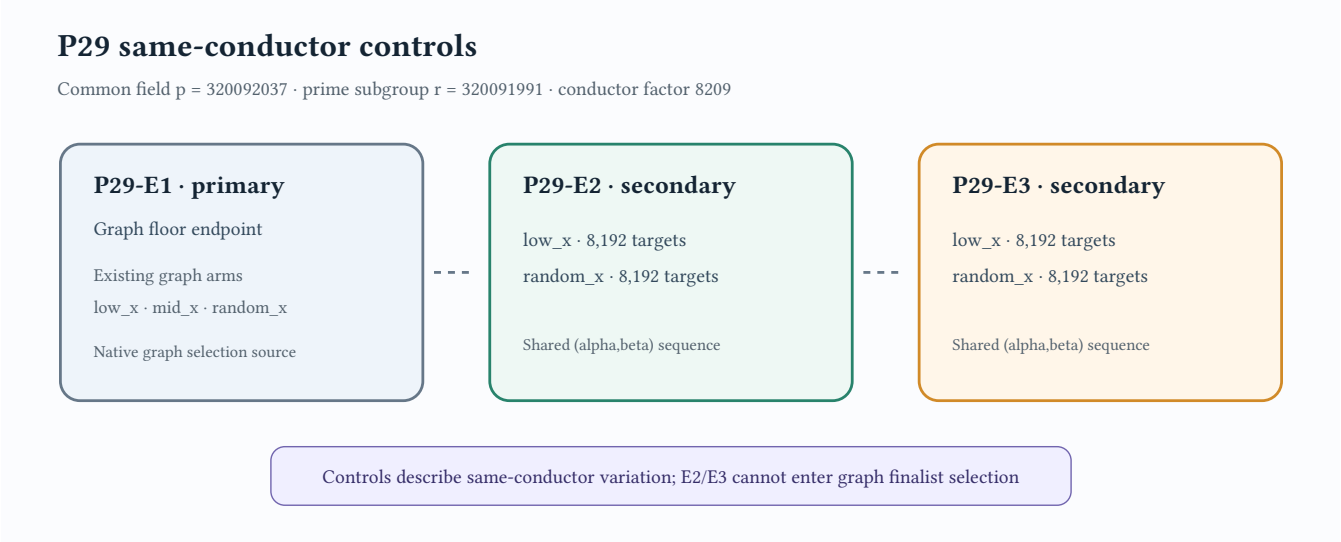

Figure 1: E2/E3 are descriptive controls and do not enter graph finalist selection.

Identity and control scope

The endpoint labels, models, generators, field size, subgroup order, and conductor factor come from the frozen source specification `experiments/EXP-ECTD-0cf008/specification.yaml`. Its exact SHA-256 is bound in `p29-secondary-floor-manifest.json`. Independent checks verify group membership and the prime-order generator certificate for each endpoint.

The schedule has four arms and 32,768 target probes total. The control test replays the common `P29/discovery` coefficient sequence for all four arms. This establishes schedule identity and domain compatibility only. There are no relation counts, rank measurements, or ECDLP trials in this supplement.

The P29-E1 floor remains primary. E2/E3 cannot enter graph finalist selection. The full experiment contract, candidate plan, and Coordinator admission must bind these controls before any scientific run.

Schedule SHA-256: `d01f15b92ebd250b9f90cbc278f55d13cc023046da268d96597ec6ddf72ec02a`
Verification manifest SHA-256: `802d326963cee7e04b3cccc0b513ac18f005deb3b18dea8250a42d4d16154dee`