Quotient lifting: historical seed capacity

All 13 frozen historical maps passed hash identity and triangularity checks. Two independent enumeration directions agreed on all 13 inputs. These are exact structural counts from degree-four certificates; no degree-five closure or new LFD bound is claimed.

Seed	Seed coordinates	New border	Working coordinates	Map GiB
T33a	4888	0	4888	0.190
R35a	5287	0	5287	0.274
R35b	5287	0	5287	0.274
U35a	5287	0	5287	0.274
U35b	5287	0	5287	0.274
Q35a	5287	0	5287	0.274
Q35b	5287	0	5287	0.274
T33b	4888	0	4888	0.190
C19a	9253	1488	10741	0.951
P45a	12742	940	13682	2.472
C19b	6817	715	7532	0.668
R37a	10066	1554	11620	0.793
R37b	10066	1554	11620	0.793

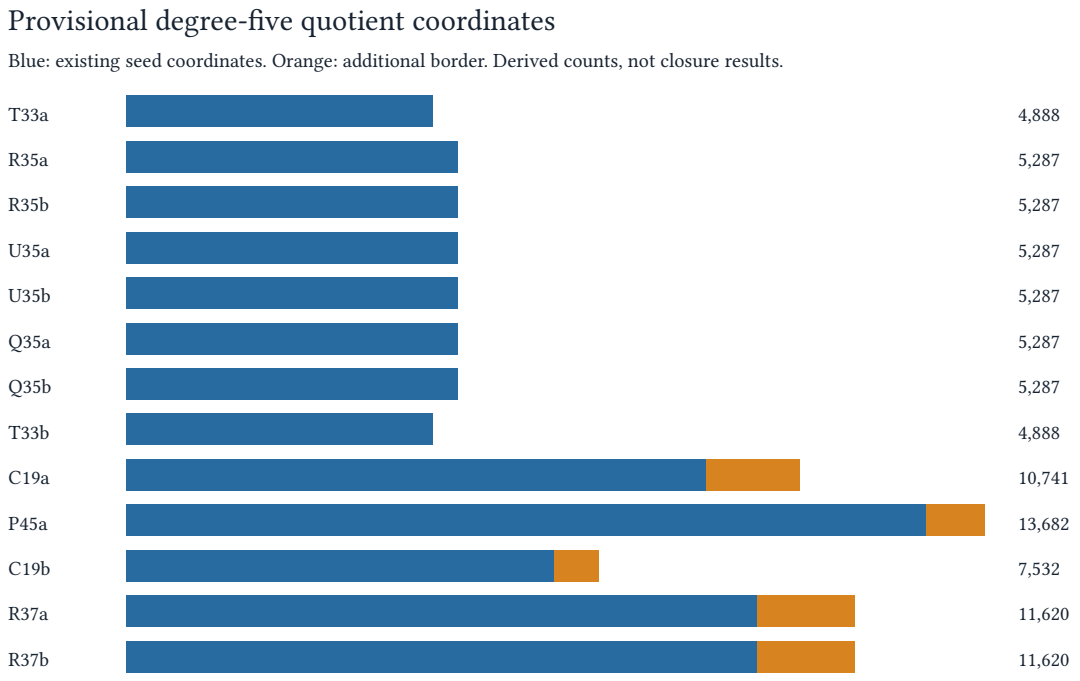

The map column is a calculated bit payload, not measured RSS. It excludes seed storage, export coexistence, indices, multiplication tables, allocator overhead, the checker and other workspaces. No speed or frontier-admission claim follows.

The small-instance reference implementation passed 144 full-space closure comparisons and four native-producer/original-checker integration fixtures. Four corrupted constant images were rejected. These are software controls, not the frontier experiment.

Next: implement a native producer with checked allocations, cross-check it against the reference and dense engine, then freeze a new degree-five run. A lower bound of six requires independent certificate acceptance and a checked codimension strictly larger than the exact solution count. Killing the constant in an over-approximating quotient is inconclusive for the true closure.

Evidence: `raw/*.json`, `export.json`, `profile-plan.json`; frozen protocol `../../profile-protocol-v2.json`. Shared-host timing is invalid. Version 1 had no executions; version 2 corrected the source commit before profiling.