
Compact candidate: exponent 8191

EXP-ISOU-feb102 / GOAL-ISOU-f30a07

Descriptive run report only: native outputs and recorded costs. No evidence-review decision or scientific promotion. One EXP/session report covers constructor RUN-ISOU-bdbf5d and the dependent verification nonstart RUN-ISOU-2b2372.

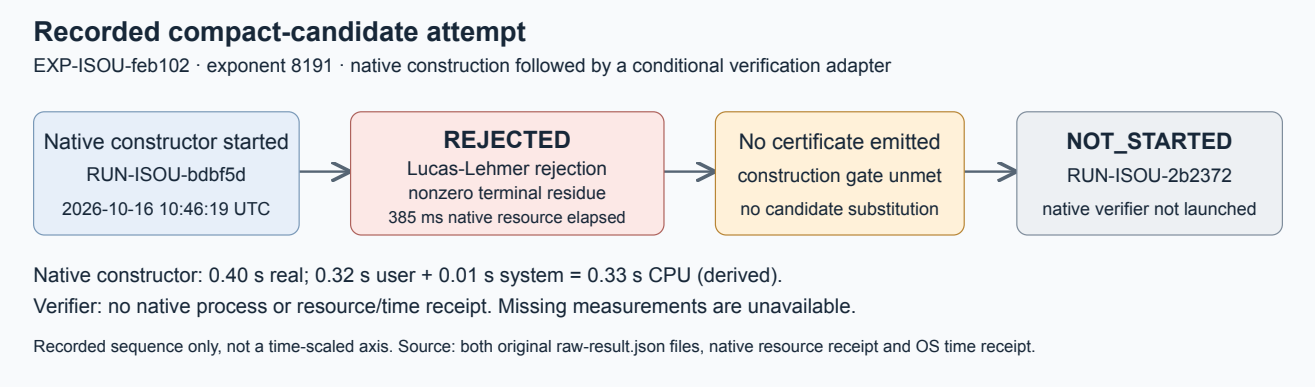

Actual trial counts and results

Two phases were planned. One native constructor started and returned REJECTED at the Lucas–Lehmer gate; no certificate was emitted. The second adapter recorded NOT_STARTED because its construction/certificate gate was unmet. No native verification process ran. No candidate was substituted and no trial was repeated. Constructor invocation: 2026-10-16 10:46:19 UTC; adapter terminal and conditional-verifier invocation: 10:46:20 UTC. The latter is an adapter timestamp, not a native verifier start.

Recorded quantity	Constructor	Native verification
Public native status	REJECTED	NOT_STARTED
Native resource status / exit	FAIL / 1	unavailable
Worker arithmetic record elapsed	372 ms	unavailable
Worker resource elapsed	385 ms	unavailable
OS real / user / system	0.40 / 0.32 / 0.01 s	unavailable
OS CPU sum, derived	0.33 s	unavailable
Sampled worker peak RSS	2,932,736 bytes	unavailable
Unavailable RSS samples	0	no process
Certificate	not emitted	no input certificate

CPU sum is 0.32 + 0.01 seconds. Its scope is the public native constructor and waited descendants, excluding build, orchestration and all other trials. Both thin adapters exited0 to acknowledge observation delivery. Canonical cpu_seconds:null fields remain unchanged. One native observation has no between-run uncertainty estimate or performance ratio.

Parameters, host and provenance

Candidate degree expression: $2^{8191} - 1$. Intended source: exact registered SEC2 secp256k1 model, a=0, b=7, prime field and trusted p/n parameters fixed in the pinned source. No geometric map degree, point transport or compact certificate was admitted here. Native constructor error reports a nonzero Lucas–Lehmer terminal residue, retained in full in raw JSON; independent arithmetic review remains separate. Native bounds were 1800s construct, 3600s verify and 8 GiB sampled worker RSS, 25ms sampling / 100ms monitor grace. They were retained unchanged. Shared Apple M4 Pro / Darwin arm64; detailed host and launch-load metadata are in both environment.json companions.

Source commit: e82d80feaf82d3730576ccd9137911b336f9dab8; dirty=false.
Executable SHA256: b3cbd6ac5d457a0f6d6398d1fcefc408f627e60be52c81c9009406486b61587b
Raw archive SHA256: 52301500bbeaa1d6bce211746657b6d66968cd4efd4c6fff6bbbb5ed5901c4f6

The 14,903-byte archive seals34 original raw files, every per-file hash, full residue/error, both run trees, metadata collector and launcher/admission/timestamps. All14 declared release artifacts and34 raw hashes were checked. Frozen inputs and executable retained their hashes. Preparation controls remain94 passed,0 failed; no controls were rerun in this trial. Serving model/effort unexposed. A flow diagram is used because only one native phase ran and no comparable completed measurement exists. Full commands, exact curve tuple, source/release bindings, missing data and render receipts are in report.md. The original rejection and nonstart records remain unchanged.