
P-192 Type I fixed-origin mixed-base collector

All 160 signed quotient classes in the frozen Type I base now have fixed-origin degree-three genus-three Jacobian representatives. Exact enumeration gives 333,184 distinct nonzero-row three-sum targets, 83,874 of which pass the two-character geometric query law. A steered known-scalar law produces 64 accepted three-sum hits, but all are known-only and give rank 0/16. A disjoint fresh accepted-scalar law also gives rank 0/16 on 64 queries.

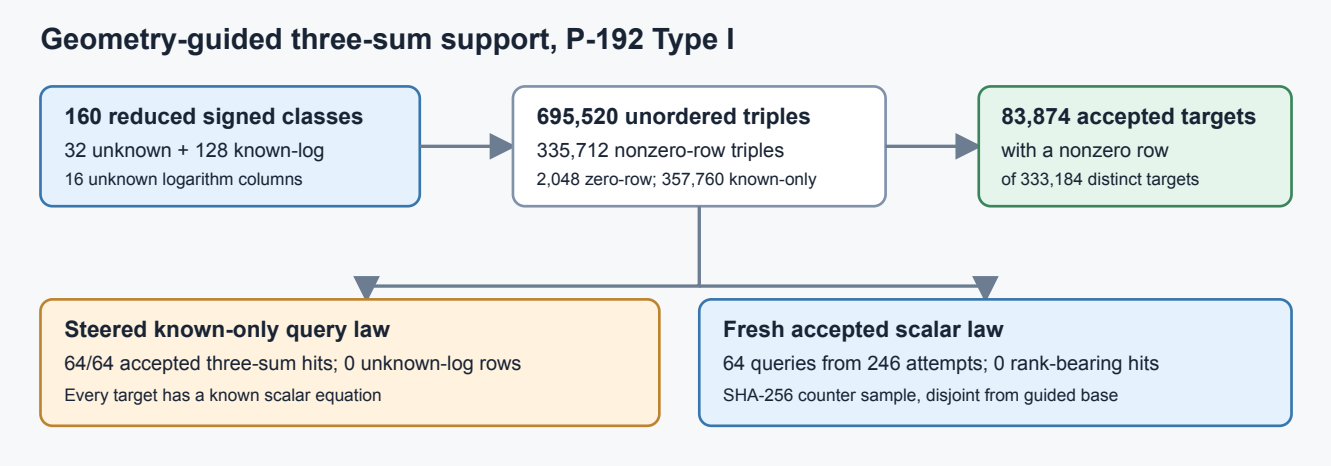

Geometry and equations

The base has 32 signed unknown classes and 128 signed guided classes whose scalars are recorded. Every class is represented as $[D - T]$ with rational effective degree-three divisors on the P-192 Type I plane quartic and one fixed origin T. For each of the 64 new negative guided classes, native PARI constructs two cubic sections and independently checks their resultants, residual points, squarefreeness, disjointness, and rank-nine interpolation. With the 80 earlier positive and 16 earlier negative classes, the evidence covers 320 cubic cuts.

Lean checks the conditional class identity and the mixed known-log equation. A triple with one unknown and two known entries gives an unknown-log row after subtracting the known contributions. A triple of three known entries gives no unknown row. The concrete P-192 divisor and quotient-map hypotheses are checked by the recorded arithmetic.

Exact census

There are 695,520 unordered triples: 357,760 known-only, 2,048 with zero unknown row, and 335,712 with a nonzero row. The latter map to 333,184 distinct targets. Their character cells are ++: 83,874; +-: 82,884; -+: 83,246; --: 83,180. The known-only triples map to 349,696 targets; there is zero overlap between the two target sets in this frozen base. The accepted rank-bearing support is exactly 62.40625 times the earlier 32-point signed base, with the same 16 unknown columns and a larger triple index.

The steered law selects 64 accepted known-only targets and retains each scalar equation. All 64 are hits by construction and produce zero unknown-log rows. The independent SHA-256-counter law obtains 64 fresh accepted scalars in 246 attempts and has zero rank-bearing matches. The certified lower bound $L = 15692754338466701909589473539876755451333156520353596805 60$ for the ideal uniform accepted-scalar law gives fixed-base hit probability at most $\frac{83874}{L} < 2^{-173}$; Lean checks this integer inequality. The deterministic sample is recorded separately from that distributional bound.

Source links, exact commands, binary and input hashes, per-phase costs, and the proof map are in `research/p192_extension_cover_20261012/reports/run-20261015T1800Z/REPORT.md`.