
Ecbench run: prime pair-table arity

Session `ECBS1h4c7b9db8a389`, started 2026-10-13 17:06 UTC. Frozen spec `specs/prime20-b64-m2-vs-m3.json` was committed at `fd85dff96` before execution. The binary SHA-256 is `be956553a5a2cd1227e8f1add8dd24e11dffba5068c799234b55e44ffc3a1b61`. The host is macOS arm64; `--cpus none --allow-busy` gave L0 isolation. Eight public targets of `icv1-fp20-t727-cd198a38` were run with target seed 20261014, one warmup and three measured rounds per arm.

Arm	Verified	Mean GAE	Mean relation trials
rho.negation	24/24	894.167	—
pair table m=2	24/24	17,909.292	10,223
pair table m=3	24/24	25,634.375	227.5
rootfind-subtract m=3	0/24	—	setup error
rho A/A	24/24	894.167	—

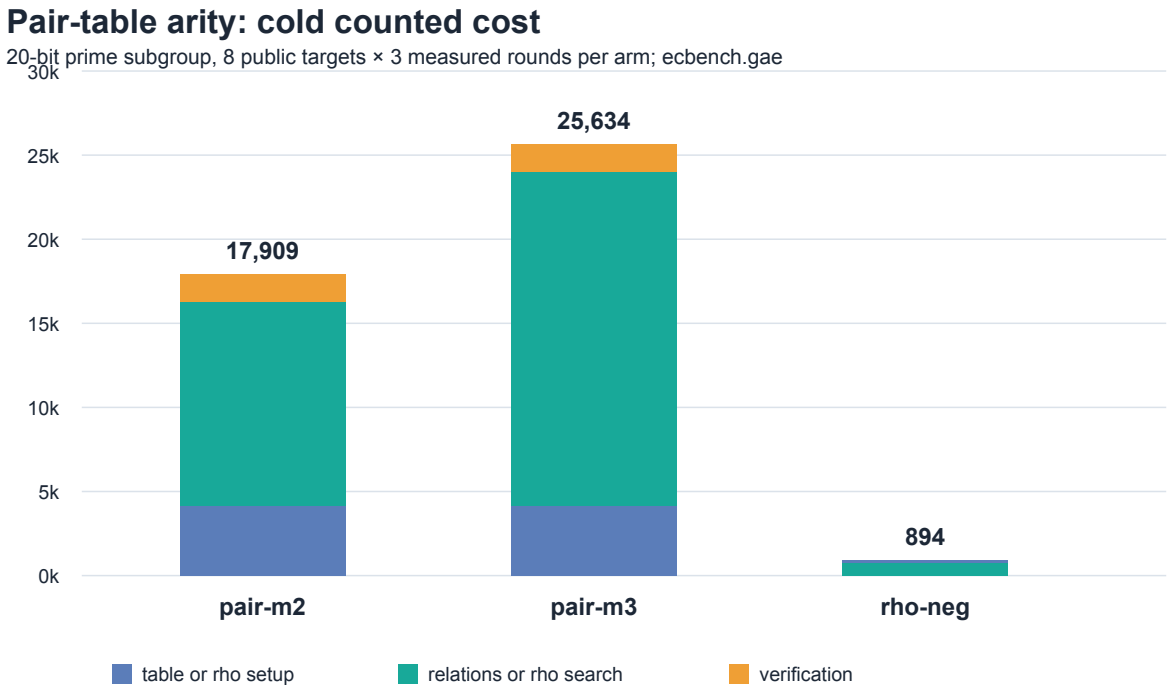

ECBS1h4c7b9db8a389 · means from sealed records; batched-rootfinder arm had 32 setup errors; L0 wall

The auxiliary rootfind arm emitted 32 setup errors because this retained binary does not register that oracle on prime curves. The session retains all errors. The audit `../../replay-all.json` accepted 160 records and reproduced 96 measured verified runs with zero problems. Raw records are in `../../sessions/prime20-b64-m2-vs-m3/records.jsonl`; exact run and verify commands are in `../../REPORT.md`. Prime native costs are not fully priced in GAE; the L0 wall values are descriptive only.