Run report: run-20261012T0216Z-bench-confirm

What ran. `taskset -c 3 ./target/release/examples/gls_loop_bench --d -619 --pbits 127 --seed 20261012 --pairs 256 --rounds 30 --w 5 --json research/isogeny_loop_glv_20261012/bench_run2.json`. This is the planned confirmation of run-20261011T2333Z-bench (`bench_run1`). Source: branch `claude/isogeny-loop-glv-sweeper` at the round-3 commits, after helper moves and a clippy-only rename. rustc 1.97.0, release.

Host. A different machine from run 1: the container restarted onto an Intel Xeon @ 2.80 GHz with 4 CPUs. Run 1 had a Xeon @ 2.10 GHz. Load average 1.23 at start and 1.21 at end (`../../bench_run2_env.txt`); another agent was starting builds. Not isolated.

Arms, unit, checks. As in run 1. All correctness checks passed, and the sink value 2f8b53ca9ff88734 equals run 1′s. Runs requested / completed: 1 / 1.

arm	median ns	min ns	wNAF / arm	GLS-2 / arm	run 1 GLS-2 / arm
wNAF	211,895	204,256	1.000	0.542	0.572
GLS-2	114,823	109,972	1.845	1.000	1.000
GLV-GLS-4 affine loop	106,268	101,386	1.994	1.081	1.118
GLV-GLS-4 projective loop	105,273	99,253	2.013	1.091	1.147
wNAF (A/A)	214,312	205,225	0.989	—	—
decompose4 (stage)	5,306	5,042	—	—	—
α′(P) affine (stage)	9,556	9,209	—	—	—
α′(P) projective (stage)	7,574	7,407	—	—	—

Ratios are derived from the recorded medians.

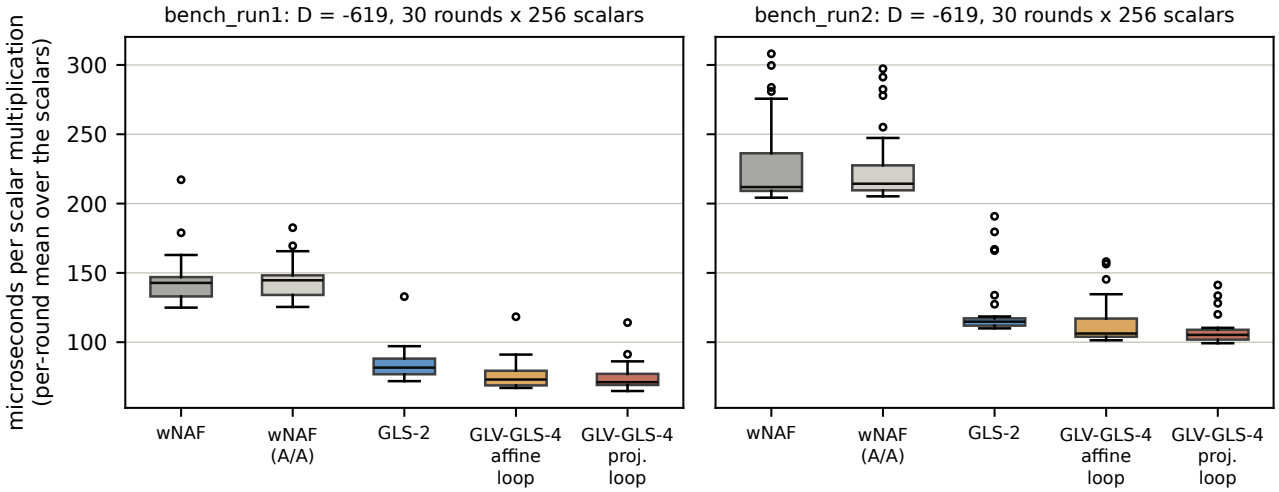


Figure 1: Per-round values for runs 1 and 2 at D = −619, 30 rounds × 256 scalars each. Run 2 is on a different host, so compare its absolute times only within the panel.

Observations only. Interpretation is in `../../README.md` §3.