
Rejected first attempt

Native instruction and allocation measurements · run-20261012T0543Z

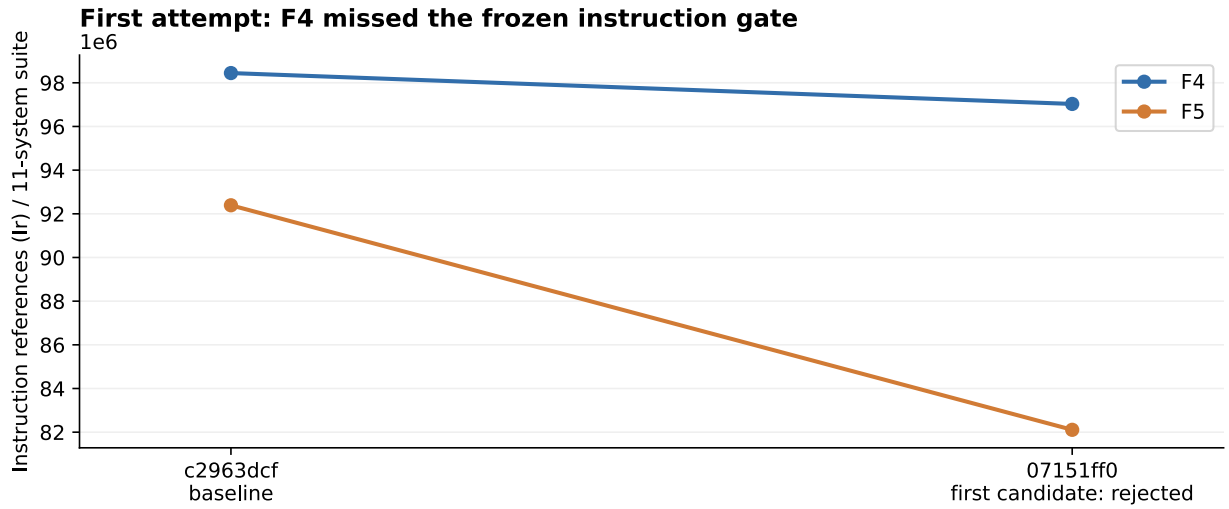

run-20261012T0543Z · 5 paired rounds. F4 verdict neutral; two-arm acceptance failed.
All first-attempt records retained. Sources: records/comparison.json and AMENDMENT-2.md.

The first candidate combined ordered F4 readback with default fused F5 construction. The native comparison records 1.44% fewer F4 instructions, below the frozen 2% verdict threshold, so F4 is neutral. F5 recorded 11.13% fewer instructions; outputs/accounting matched and memory did not regress. The frozen two-arm acceptance failed. All profiles, the comparison and controls are retained unchanged. AMENDMENT-2 preregistered compact F4 column lookup before the second measurement, preserving inputs and gates. The final attempt reuses the two unchanged baseline profiles and runs fresh candidate primary and paired profiles.

Native sources: final comparison and raw-record hashes, frozen protocol, first rejection, bounded correction, gate scope, fixture repair, report and validation. Raw Callgrind dumps and Rust JSONL remain beside the data. Earlier segment: hashing study. Validation: 3,995 release-library tests passed, zero failed, 112 ignored; complete named coverage verified. The long ignored isogeny test passed separately. 46 Groebner/F4, 18 F5, 21 polynomial, 24 native coordinate and five comparison tests passed; Cargo examples and Clippy passed. Earlier failed/interrupted checks are retained. The inherited fixture-only repair preserves order rejection and strict parsing. Runtime and process RSS remain unmeasured.