
Complete Boolean F4/F5 calls

Native instruction and allocation measurements · run-20261012T0543Z

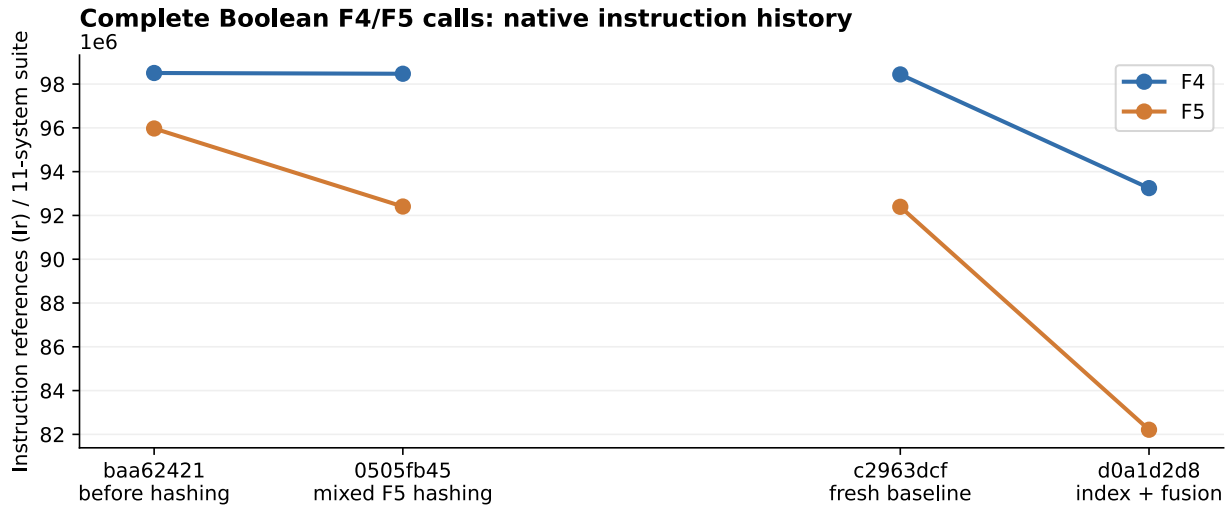

Each segment: 5 paired rounds, 11 systems, native medians and all samples; merged workers.
run-20261012T0543Z · Gap crosses unrelated main updates; both studies' comparison.json.

F4: 98,440,694 → 93,248,010 Ir per suite. Paired instruction reduction 5.28% (95% bootstrap interval 5.274% to 5.284%). Native verdict: fewer instructions.

F5: 92,393,939 → 82,211,306 Ir per suite. Paired instruction reduction 11.02% (95% bootstrap interval 11.016% to 11.032%). Native verdict: fewer instructions.

Five paired rounds of all eleven frozen systems, one Rayon worker. Both complete-call arms are optimized. The native verdict requires a 95% bootstrap interval excluding zero and an effect above twice the A/A noise estimate and 2%. Every reduced output, input hash, pruning report and word-XOR count matched. All complete-call cases have the fewer-instruction verdict. The clarified complete-call gate passes; the original gate over 33 cases fails on three standalone criterion cases. ACCEPTANCE-CLARIFICATION records this scope change before final measurement.

Native sources: final comparison and raw-record hashes, frozen protocol, first rejection, bounded correction, gate scope, fixture repair, report and validation. Raw Callgrind dumps and Rust JSONL remain beside the data. Earlier segment: hashing study. Validation: 3,995 release-library tests passed, zero failed, 112 ignored; complete named coverage verified. The long ignored isogeny test passed separately. 46 Groebner/F4, 18 F5, 21 polynomial, 24 native coordinate and five comparison tests passed; Cargo examples and Clippy passed. Earlier failed/interrupted checks are retained. The inherited fixture-only repair preserves order rejection and strict parsing. Runtime and process RSS remain unmeasured.